

Efficiency and Derating

**SUNNY BOY / SUNNY BOY STORAGE /
SUNNY TRIPOWER / SUNNY MINI CENTRAL /
SUNNY HIGHPOWER**

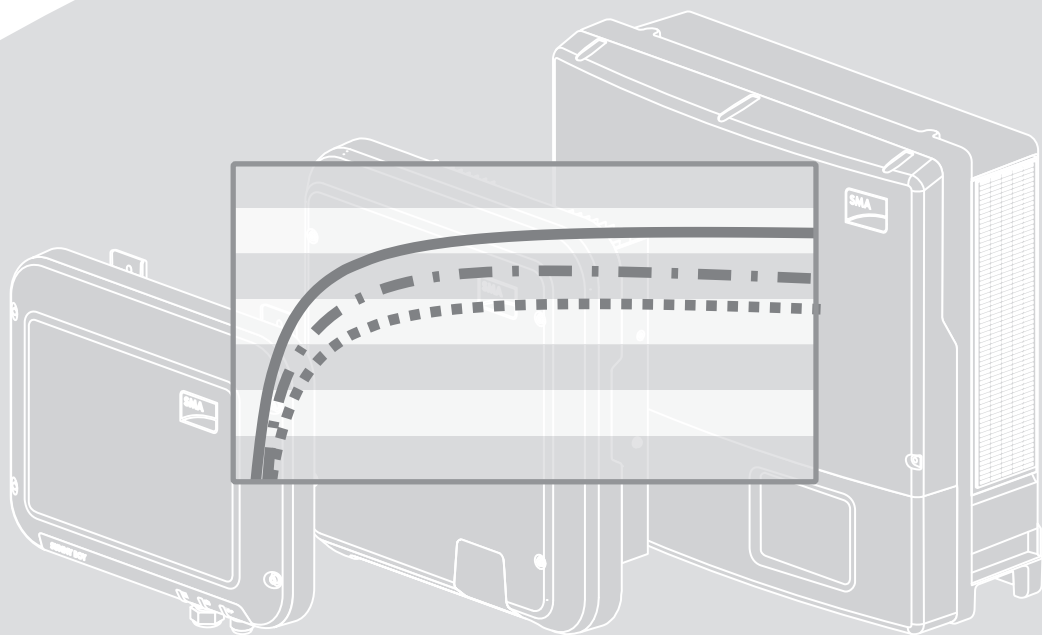


Table of Contents

1	Information on this Document	8
1.1	Validity	8
1.2	Target Group	9
2	Data Explanation	10
3	Sunny Boy	11
3.1	SB 240-10	11
3.2	SB 1200	12
3.2.1	Efficiency	12
3.2.2	Derating Behavior	13
3.3	SB 1300TL-10	14
3.3.1	Efficiency	14
3.3.2	Derating Behavior	15
3.4	SB1.5-1VL-40	16
3.4.1	Efficiency	16
3.4.2	Derating Behavior	17
3.5	SB 1600TL-10	18
3.5.1	Efficiency	18
3.5.2	Derating Behavior	19
3.6	SB 1700	20
3.6.1	Efficiency	20
3.6.2	Derating Behavior	21
3.7	SB2.0-1VL-40	22
3.7.1	Efficiency	22
3.8	SB 2000HF-30	23
3.8.1	Efficiency	23
3.8.2	Derating Behavior	24
3.9	SB 2100TL	25
3.9.1	Efficiency	25
3.9.2	Derating Behavior	26
3.10	SB2.5-1VL-40	27
3.10.1	Efficiency	27
3.10.2	Derating Behavior	28
3.11	SB 2500	29
3.11.1	Efficiency	29
3.11.2	Derating Behavior	30
3.12	SB 2500HF-30	31
3.12.1	Efficiency	31
3.12.2	Derating Behavior	32
3.13	SB3.0-1AV-40	33

3.13.1	Efficiency	33
3.13.2	Derating Behavior.....	34
3.14	SB 3000	35
3.14.1	Efficiency	35
3.14.2	Derating Behavior.....	36
3.15	SB 3000HF-30.....	37
3.15.1	Efficiency	37
3.15.2	Derating Behavior.....	38
3.16	SB 3000TL-20	39
3.16.1	Efficiency	39
3.16.2	Derating Behavior.....	40
3.17	SB 3000TL-21	41
3.17.1	Efficiency	41
3.17.2	Derating Behavior.....	42
3.18	SB 3300 / SB 3300-11	43
3.18.1	Efficiency	43
3.18.2	Derating Behavior.....	44
3.19	SB3.6-1AV-40	45
3.19.1	Efficiency	45
3.19.2	Derating Behavior.....	46
3.20	SB 3600SE-10	47
3.20.1	PV Efficiency.....	47
3.20.2	Charge / Discharge Efficiency	48
3.20.3	Derating Behavior.....	50
3.21	SB 3600TL-21	51
3.21.1	Efficiency	51
3.21.2	Derating Behavior.....	52
3.22	SB 3800 / SB 3800-11	53
3.22.1	Efficiency	53
3.22.2	Derating Behavior.....	54
3.23	SB4.0-1AV-40	55
3.23.1	Efficiency	55
3.23.2	Derating Behavior.....	56
3.24	SB 4000TL-20	57
3.24.1	Efficiency	57
3.24.2	Derating Behavior.....	58
3.25	SB 4000TL-21	59
3.25.1	Efficiency	59
3.25.2	Derating Behavior.....	60
3.26	SB5.0-1AV-40	61
3.26.1	Efficiency	61
3.26.2	Derating Behavior.....	62
3.27	SB 5000SE-10	63

3.27.1	PV Efficiency	63
3.27.2	Charge / Discharge Efficiency	64
3.27.3	Derating Behavior	66
3.28	SB 5000TL-20	67
3.28.1	Efficiency	67
3.28.2	Derating Behavior	68
3.29	SB 5000TL-21	69
3.29.1	Efficiency	69
3.29.2	Derating Behavior	70
4	Sunny Boy Storage	71
4.1	SBS2.5-1VL-10	71
4.1.1	DC Efficiency	71
4.1.2	Derating Behavior	72
4.2	SBS3.7-10	73
4.2.1	DC Efficiency	73
4.2.2	Derating Behavior	74
4.3	SBS5.0-10	75
4.3.1	DC Efficiency	75
4.3.2	Derating Behavior	76
4.4	SBS6.0-10	77
4.4.1	DC Efficiency	77
4.4.2	Derating Behavior	78
5	Sunny Tripower	79
5.1	STP 50-40	79
5.1.1	Efficiency	79
5.1.2	Derating Behavior	80
5.2	STP 50-JP-40	81
5.2.1	Efficiency	81
5.2.2	Derating Behavior	82
5.3	STP 60-10	83
5.3.1	Efficiency	83
5.3.2	Derating Behavior	84
5.4	STP 60-JP-10	85
5.4.1	Efficiency	85
5.4.2	Derating Behavior	86
5.5	STP3.0-3AV-40	87
5.5.1	Efficiency	87
5.5.2	Derating Behavior	88
5.6	STP4.0-3AV-40	89
5.6.1	Efficiency	89
5.6.2	Derating Behavior	90
5.7	STP5.0-3AV-40	91

5.7.1	Efficiency	91
5.7.2	Derating Behavior.....	92
5.8	STP6.0-3AV-40.....	93
5.8.1	Efficiency	93
5.8.2	Derating Behavior.....	94
5.9	STP8.0-3AV-40.....	95
5.9.1	Efficiency	95
5.9.2	Derating Behavior.....	96
5.10	STP10.0-3AV-40	97
5.10.1	Efficiency	97
5.10.2	Derating Behavior.....	98
5.11	STP 5000TL-20.....	99
5.11.1	Efficiency	99
5.11.2	Derating Behavior.....	100
5.12	STP 6000TL-20.....	101
5.12.1	Efficiency	101
5.12.2	Derating Behavior.....	102
5.13	STP 7000TL-20.....	103
5.13.1	Efficiency	103
5.13.2	Derating Behavior.....	104
5.14	STP 8000TL-10.....	105
5.14.1	Efficiency	105
5.14.2	Derating Behavior.....	106
5.15	STP 8000TL-20.....	107
5.15.1	Efficiency	107
5.15.2	Derating Behavior.....	108
5.16	STP 9000TL-20.....	109
5.16.1	Efficiency	109
5.16.2	Derating Behavior.....	110
5.17	STP 10000TL-10	111
5.17.1	Efficiency	111
5.17.2	Derating Behavior.....	112
5.18	STP 10000TLEE-JP-10 / STP 10000TLEE-JP-11	113
5.18.1	Efficiency	113
5.18.2	Derating Behavior.....	114
5.19	STP 10000TL-20	115
5.19.1	Efficiency	115
5.19.2	Derating Behavior.....	116
5.20	STP 12000TL-10	117
5.20.1	Efficiency	117
5.20.2	Derating Behavior.....	118
5.21	STP 12000TL-20	119
5.21.1	Efficiency	119

5.21.2	Derating Behavior.....	120
5.22	STP 15000TL-10	121
5.22.1	Efficiency	121
5.22.2	Derating Behavior.....	122
5.23	STP 15000TLEE-10	123
5.23.1	Efficiency	123
5.23.2	Derating Behavior.....	124
5.24	STP 15000TLHE-10	125
5.24.1	Efficiency	125
5.24.2	Derating Behavior.....	126
5.25	STP 17000TL-10	127
5.25.1	Efficiency	127
5.25.2	Derating Behavior.....	128
5.26	STP 20000TLEE-10	129
5.26.1	Efficiency	129
5.26.2	Derating Behavior.....	130
5.27	STP 20000TLEE-JP-11	131
5.27.1	Efficiency	131
5.27.2	Derating Behavior.....	132
5.28	STP 20000TLHE-10	133
5.28.1	Efficiency	133
5.28.2	Derating Behavior.....	134
5.29	STP 15000TL-30	135
5.29.1	Efficiency	135
5.29.2	Derating Behavior.....	136
5.30	STP 20000TL-30	137
5.30.1	Efficiency	137
5.30.2	Derating Behavior.....	138
5.31	STP 25000TL-30	139
5.31.1	Efficiency	139
5.31.2	Derating Behavior.....	140
5.32	STP 24500TL-JP-30	141
5.32.1	Efficiency	141
5.32.2	Derating Behavior.....	142
5.33	STP 25000TL-JP-30	143
5.33.1	Efficiency	143
5.33.2	Derating Behavior.....	144

6 Sunny Mini Central..... 145

6.1	SMC 4600A / SMC 4600A-11	145
6.1.1	Efficiency	145
6.1.2	Derating Behavior.....	146
6.2	SMC 5000A / SMC 5000A-11	147

6.2.1	Efficiency	147
6.2.2	Derating Behavior.....	148
6.3	SMC 6000A / SMC 6000A-11	149
6.3.1	Efficiency	149
6.3.2	Derating Behavior.....	150
6.4	SMC 6000TL.....	151
6.4.1	Efficiency	151
6.4.2	Derating Behavior.....	152
6.5	SMC 7000HV-11	153
6.5.1	Efficiency	153
6.5.2	Derating Behavior.....	154
6.6	SMC 7000TL.....	155
6.6.1	Efficiency	155
6.6.2	Derating Behavior.....	156
6.7	SMC 8000TL.....	157
6.7.1	Efficiency	157
6.7.2	Derating Behavior.....	158
6.8	SMC 9000TL-10	159
6.8.1	Efficiency	159
6.8.2	Derating Behavior.....	160
6.9	SMC 9000TLRP-10	161
6.9.1	Efficiency	161
6.9.2	Derating Behavior.....	162
6.10	SMC 10000TL-10	163
6.10.1	Efficiency	163
6.10.2	Derating Behavior.....	164
6.11	SMC 10000TLRP-10	165
6.11.1	Efficiency	165
6.11.2	Derating Behavior.....	166
6.12	SMC 11000TL-10	167
6.12.1	Efficiency	167
6.12.2	Derating Behavior.....	168
6.13	SMC 11000TLRP-10	169
6.13.1	Efficiency	169
6.13.2	Derating Behavior.....	170

7 Sunny Highpower 171

7.1	SHP 75-10.....	171
7.1.1	Efficiency	171
7.1.2	Derating Behavior.....	172
7.2	SHP 75-JP-10.....	173
7.2.1	Efficiency	173
7.2.2	Derating Behavior.....	174

1 Information on this Document

1.1 Validity

This document describes in graphic and tabular form the efficiency profile and the derating behavior in accordance with DIN EN 50524:2010 of the following SMA inverters (status: 01/2019, subject to technical changes):

Sunny Boy

- SB 240-10
- SB 1200 / SB 1700
- SB 1300TL-10 / SB 1600TL-10 / SB 2100TL
- SB1.5-1VL-40 / SB2.0-1VL-40 / SB2.5-1VL-40
- SB 2000HF-30 / SB 2500HF-30 / SB 3000HF-30
- SB 2500 / SB 3000
- SB3.0-1AV-40 / SB3.6-1AV-40 / SB4.0-1AV-40 / SB5.0-1AV-40
- SB 3000TL-20 / SB 4000TL-20 / SB 5000TL-20
- SB 3000TL-21 / SB 3600TL-21 / SB 4000TL-21 / SB 5000TL-21
- SB 3300 / SB 3800
- SB 3300-11 / SB 3800-11
- SB 3600SE-10 / SB 5000SE-10

Sunny Boy Storage

- SBS2.5-1VL-10
- SBS3.7-10 / SBS5.0-10 / SBS6.0-10

Sunny Tripower

- STP 50-40 / STP 50-JP-40
- STP 60-10 / STP 60-JP-10
- STP3.0-3AV-40 / STP4.0-3AV-40 / STP5.0-3AV-40 / STP6.0-3AV-40 / STP8.0-3AV-40 / STP10.0-3AV-40
- STP 5000TL-20 / STP 6000TL-20 / STP 7000TL-20 / STP 8000TL-20 / STP 9000TL-20 / STP 10000TL-20 / STP 12000TL-20
- STP 8000TL-10 / STP 10000TL-10 / STP 12000TL-10 / STP 15000TL-10 / STP 17000TL-10
- STP 10000TLEE-JP-10 / STP 10000TLEE-JP-11 / STP 20000TLEE-JP-11
- STP 15000TLEE-10/STP 20000TLEE-10
- STP 15000TLHE-10 / STP 20000TLHE-10
- STP 15000TL-30 / STP 20000TL-30 / STP 25000TL-30
- STP 24500TL-JP-30 / STP 25000TL-JP-30

Sunny Mini Central

- SMC 4600A / SMC 5000A / SMC 6000A

- SMC 4600A-11 / SMC 5000A-11 / SMC 6000A-11
- SMC 6000TL / SMC 8000TL / SMC 7000TL
- SMC 7000HV-11
- SMC 9000TL-10 / SMC 10000TL-10 / SMC 11000TL-10
- SMC 9000TLRP-10 / SMC 10000TLRP-10 / SMC 11000TLRP-10

Sunny Highpower

- SHP 75-10 / SHP 75-JP-10

1.2 Target Group

The information in this document is intended for installers and operators of PV systems with SMA inverters as well as for PV system planners.

2 Data Explanation

Efficiency Profile - Curve and Measured Values

The efficiency is the ratio of output power to input power and is given as a percentage value. This document describes the inverter efficiency in graphic and tabular form. The efficiency is given for the minimum MPP voltage, the rated input voltage and the maximum MPP voltage.

Maximum and European Weighted Efficiency

The maximum efficiency is the highest inverter efficiency at rated input voltage. The European weighted efficiency is calculated by weighing different partial load efficiencies and the full load efficiency at the rated input voltage according to the frequency in which they occur.


The calculation formula is: $\eta_{EU} = (0.03 \times \eta_{5\%}) + (0.06 \times \eta_{10\%}) + (0.13 \times \eta_{20\%}) + (0.1 \times \eta_{30\%}) + (0.48 \times \eta_{50\%}) + (0.2 \times \eta_{100\%})$

Derating Behavior

Safety mechanisms are implemented in the inverter protecting the inverter against damage due to too high ambient temperatures or too high output currents. This behavior reduces the inverter output power ("derating"). In this document, the derating behavior of the inverters is shown in graphic form. The derating behavior is given for the minimum MPP voltage, the rated input voltage and the maximum MPP voltage.

3 Sunny Boy

3.1 SB 240-10

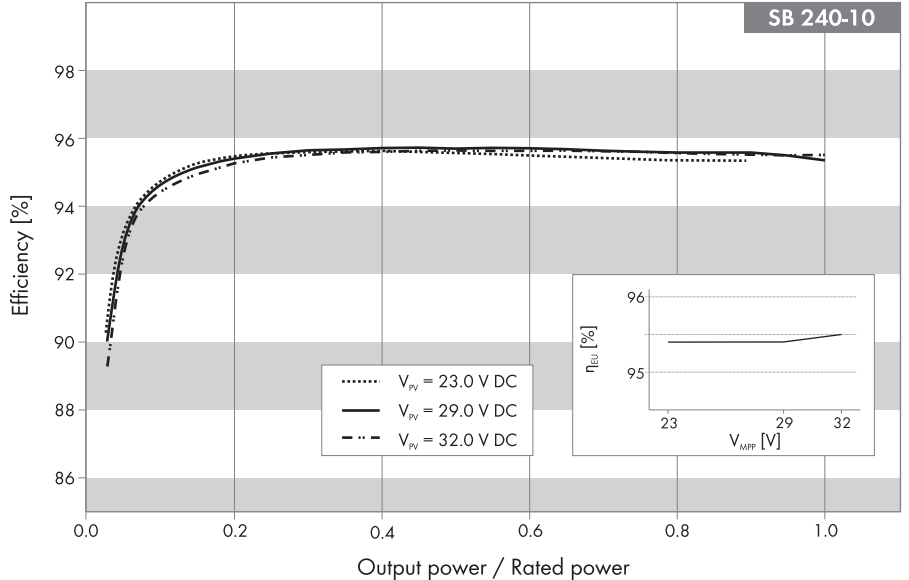


Maximum efficiency, η_{max}	95.8%
European efficiency, η_{EU}	95.3%

Efficiency Profile

Standardized output power	Efficiency		
	Minimum MPP voltage 23 V	Rated input voltage 29 V	Maximum MPP voltage 32 V
5%	93.0%	92.6%	93.0%
10%	94.7%	94.6%	94.5%
20%	95.4%	95.4%	95.3%
25%	95.5%	95.6%	95.4%
30%	95.6%	95.7%	95.5%
50%	95.6%	95.8%	95.6%
75%	95.4%	95.6%	95.6%
100%	95.4%	95.4%	95.5%

3.2 SB 1200

3.2.1 Efficiency

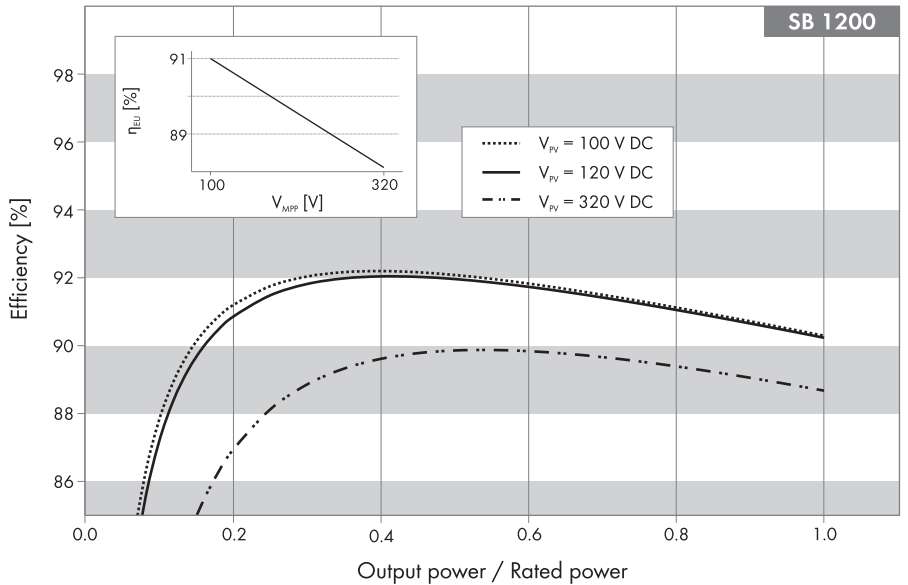


Maximum efficiency, η_{max}	92.1%
European efficiency, η_{EU}	90.9%

Efficiency Profile


Standardized output power	Efficiency		
	Minimum MPP voltage 100 V	Rated input voltage 120 V	Maximum MPP voltage 320 V
5%	80.7%	79.7%	72.7%
10%	87.8%	87.1%	81.3%
20%	91.2%	90.8%	86.9%
25%	91.7%	91.5%	88.1%
30%	92.0%	91.8%	88.8%
50%	92.1%	92.0%	89.9%
75%	91.3%	91.2%	89.5%
100%	90.3%	90.2%	88.7%

3.2.2 Derating Behavior

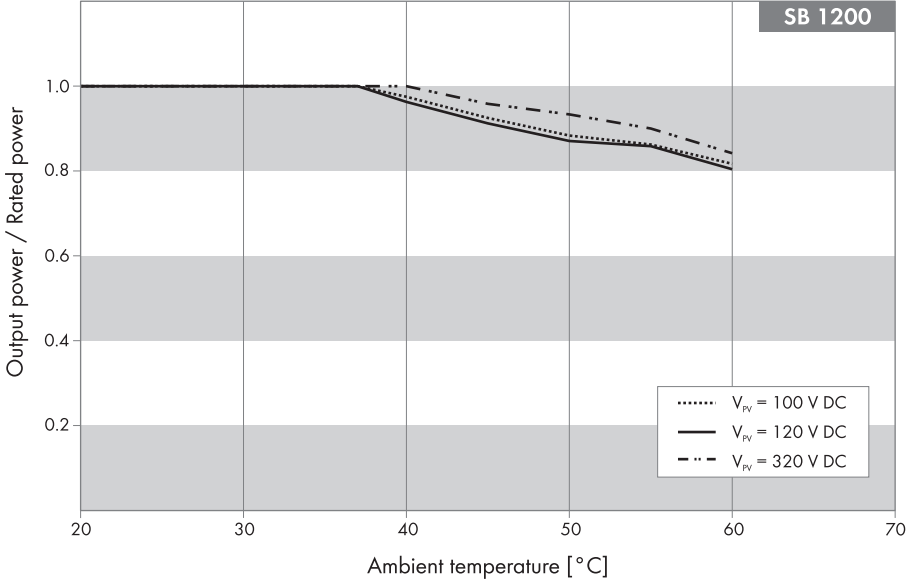

3.3 SB 1300TL-10

3.3.1 Efficiency

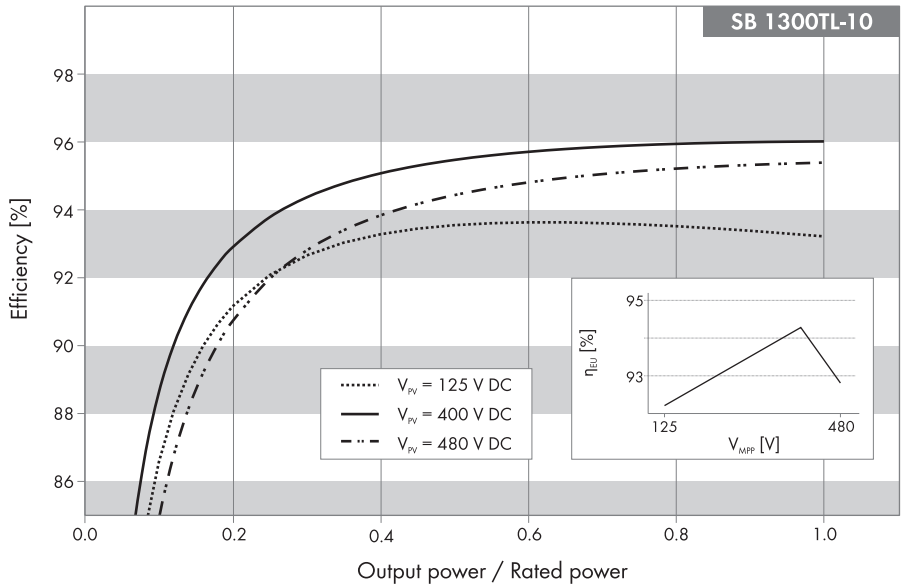


Maximum efficiency, $\eta_{\max}$	96.0%
European efficiency, η_{EU}	94.3%

Efficiency Profile


Standardized output power	Efficiency		
	Minimum MPP voltage 125 V	Rated input voltage 400 V	Maximum MPP voltage 480 V
5%	78.3%	80.6%	74.6%
10%	86.6%	88.6%	84.9%
20%	91.2%	92.9%	90.7%
25%	92.7%	93.8%	92.0%
30%	93.6%	94.4%	92.8%
50%	93.6%	95.5%	94.4%
75%	93.6%	95.9%	95.1%
100%	93.2%	96.0%	95.4%

3.3.2 Derating Behavior

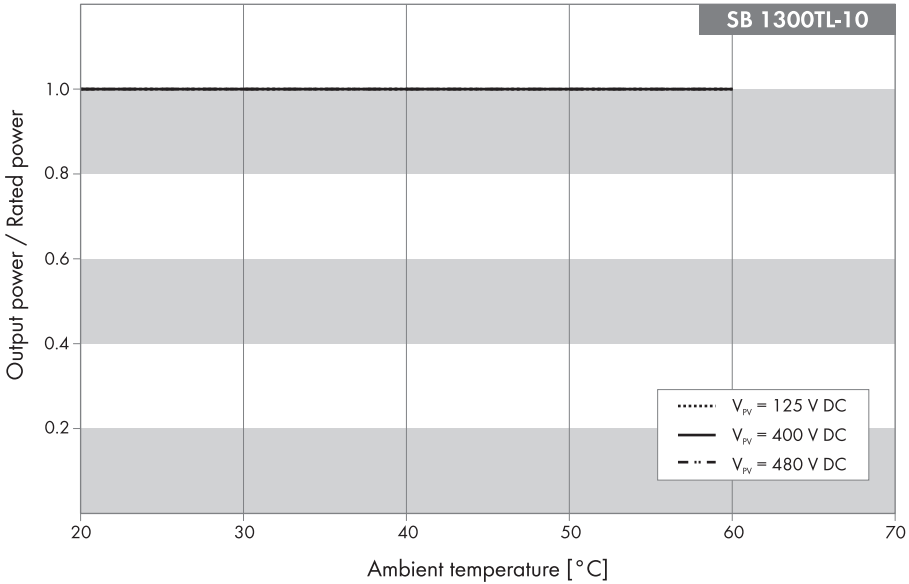

3.4 SB1.5-1VL-40

3.4.1 Efficiency

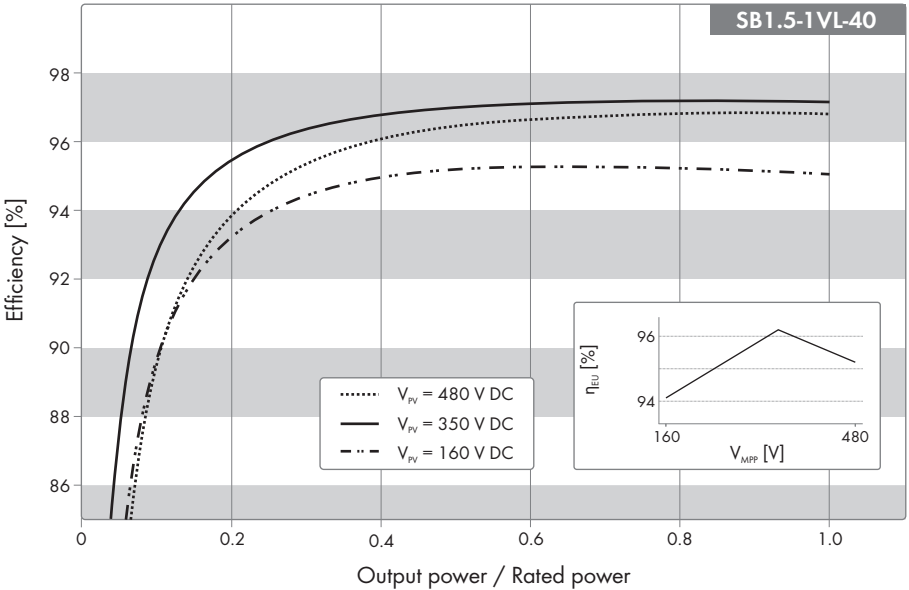


Maximum efficiency, η_{max} 97.2%

European weighted efficiency, η_{EU} 96.2%

Efficiency Profile


Standardized output power	Efficiency		
	Minimum MPP voltage 160 V	Rated input voltage 350 V	Maximum MPP voltage 480 V
5%	83.2%	87.5%	81.6%
10%	89.6%	92.7%	89.4%
20%	93.3%	95.5%	93.9%
25%	94.0%	96.0%	94.8%
30%	94.4%	96.4%	95.4%
50%	95.2%	97.0%	96.4%
75%	95.3%	97.2%	96.8%
100%	95.1%	97.2%	96.8%

3.4.2 Derating Behavior

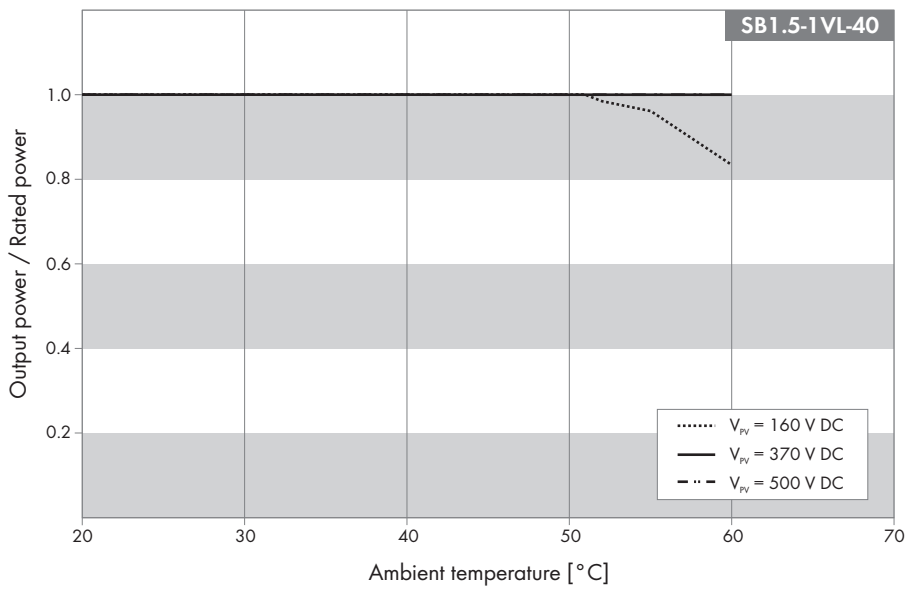

3.5 SB 1600TL-10

3.5.1 Efficiency

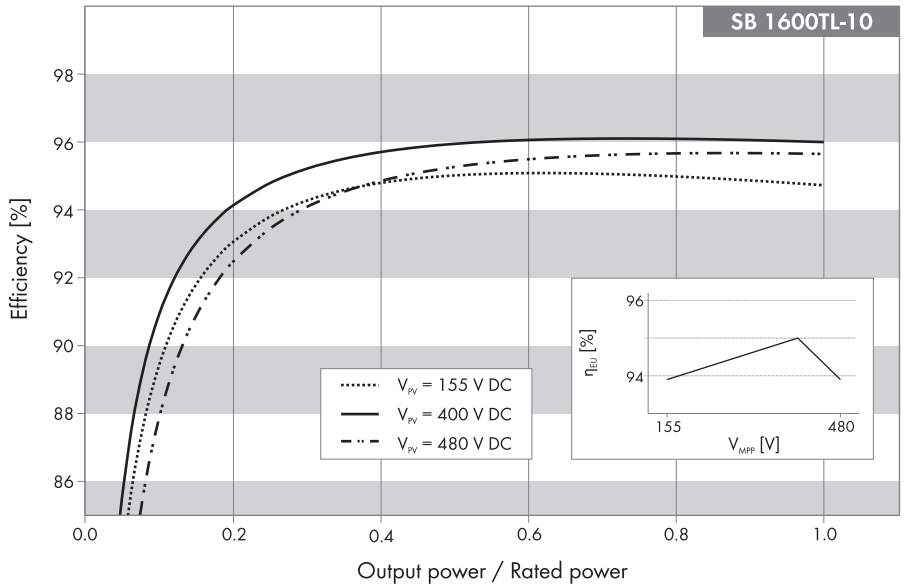


Maximum efficiency, $\eta_{\max}$	96.0%
European efficiency, η_{EU}	95.0%

Efficiency Profile


Standardized output power	Efficiency		
	Minimum MPP voltage 155 V	Rated input voltage 400 V	Maximum MPP voltage 480 V
5%	83.2%	85.1%	79.8%
10%	89.4%	90.9%	87.8%
20%	93.0%	94.1%	92.5%
25%	93.8%	94.8%	93.4%
30%	94.3%	95.2%	94.1%
50%	95.0%	95.9%	95.3%
75%	95.0%	96.0%	95.6%
100%	94.7%	96.0%	95.6%

3.5.2 Derating Behavior

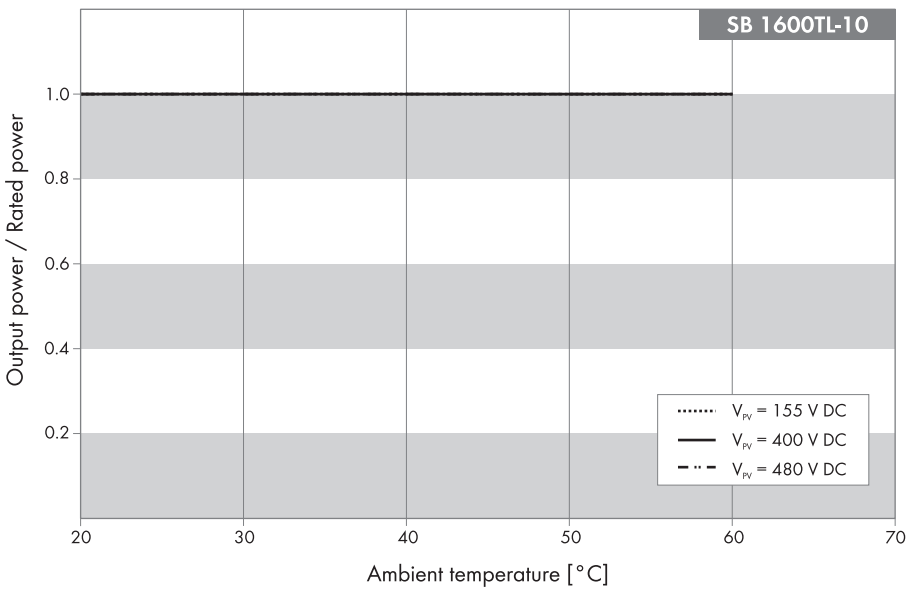

3.6 SB 1700

3.6.1 Efficiency

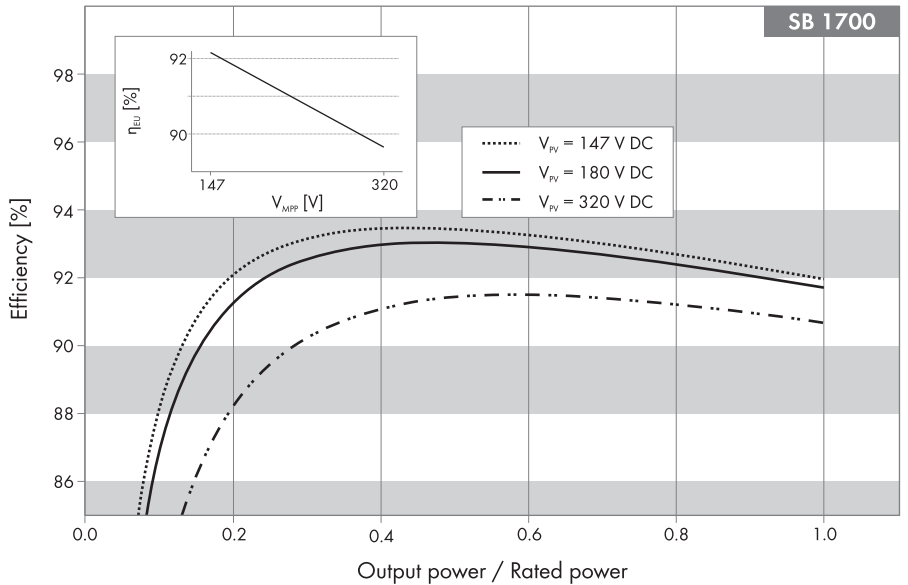


Maximum efficiency, $\eta_{\max}$	93.5%
European efficiency, η_{EU}	91.8%

Efficiency Profile


Standardized output power	Efficiency		
	Minimum MPP voltage 147 V	Rated input voltage 180 V	Maximum MPP voltage 320 V
5%	80.4%	78.9%	74.3%
10%	88.2%	87.0%	82.6%
20%	92.1%	91.3%	88.3%
25%	92.8%	92.1%	89.5%
30%	93.2%	92.6%	90.3%
50%	93.4%	93.0%	91.4%
75%	92.8%	92.5%	91.3%
100%	92.0%	91.7%	90.7%

3.6.2 Derating Behavior

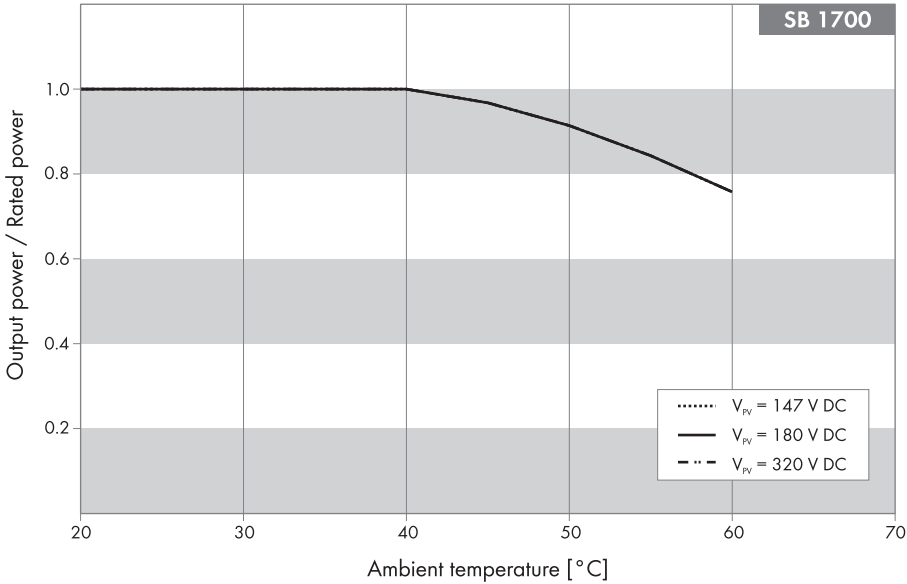

3.7 SB2.0-1VL-40

3.7.1 Efficiency

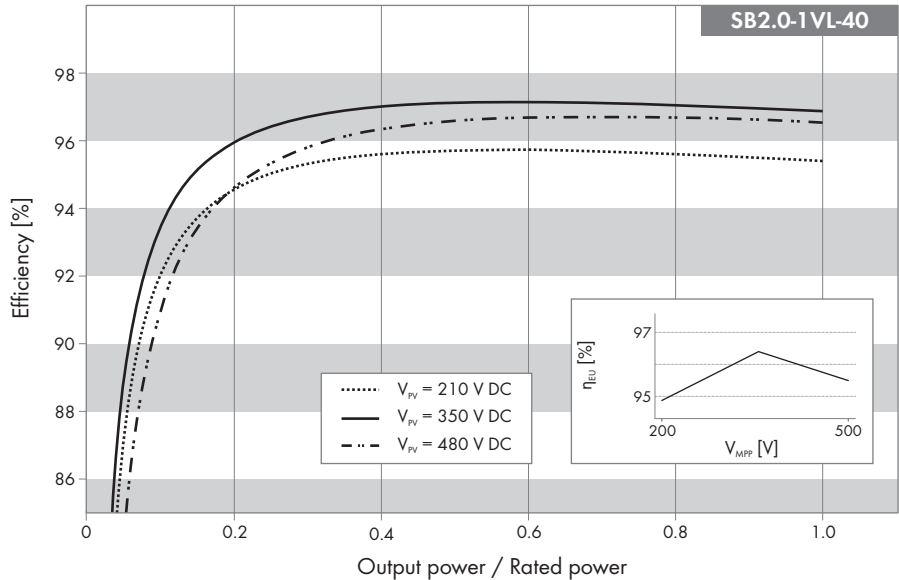


Maximum efficiency, η_{max}	97.1%
European weighted efficiency, η_{EU}	96.4%

Efficiency Profile

Standardized output power	Efficiency		
	Minimum MPP voltage 210 V	Rated input voltage 350 V	Maximum MPP voltage 480 V
5%	87.0%	88.6%	84.0%
10%	92.0%	93.4%	90.9%
20%	94.5%	95.9%	94.6%
25%	95.0%	96.4%	95.3%
30%	95.3%	96.7%	95.8%
50%	95.7%	97.1%	96.6%
75%	95.6%	97.1%	96.7%
100%	95.4%	96.9%	96.5%

3.8 SB 2000HF-30

3.8.1 Efficiency

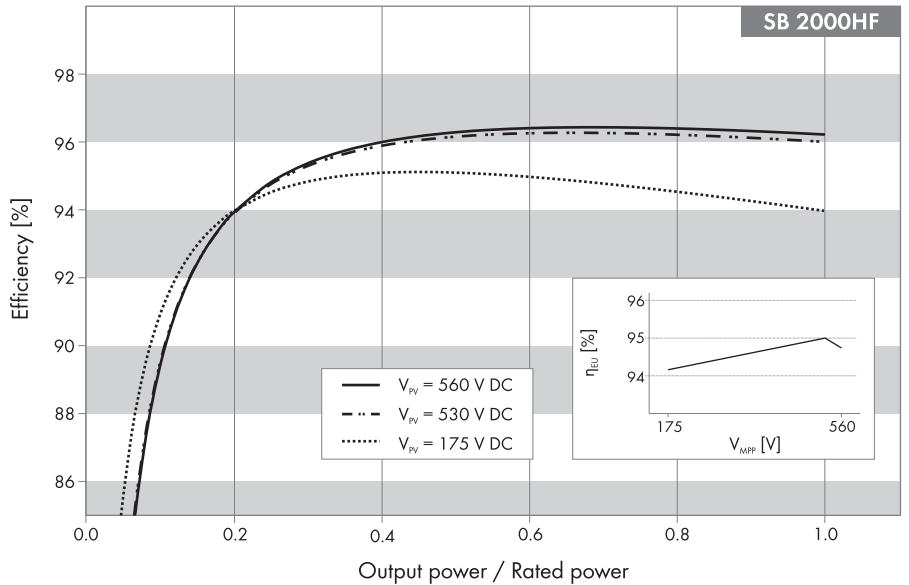


Maximum efficiency, $\eta_{\max}$	96.3 %
European weighted efficiency, η_{EU}	95.0 %

Efficiency Profile


Standardized output power	Efficiency		
	Minimum MPP voltage 175 V	Rated input voltage 530 V	Maximum MPP voltage 560 V
5 %	85.1 %	80.8 %	80.5 %
10 %	90.8 %	89.6 %	89.0 %
20 %	93.7 %	93.9 %	93.6 %
25 %	94.6 %	95.0 %	94.8 %
30 %	94.8 %	95.3 %	95.1 %
50 %	95.2 %	96.2 %	96.1 %
75 %	94.5 %	96.3 %	96.3 %
100 %	94.0 %	96.2 %	96.0 %

3.8.2 Derating Behavior

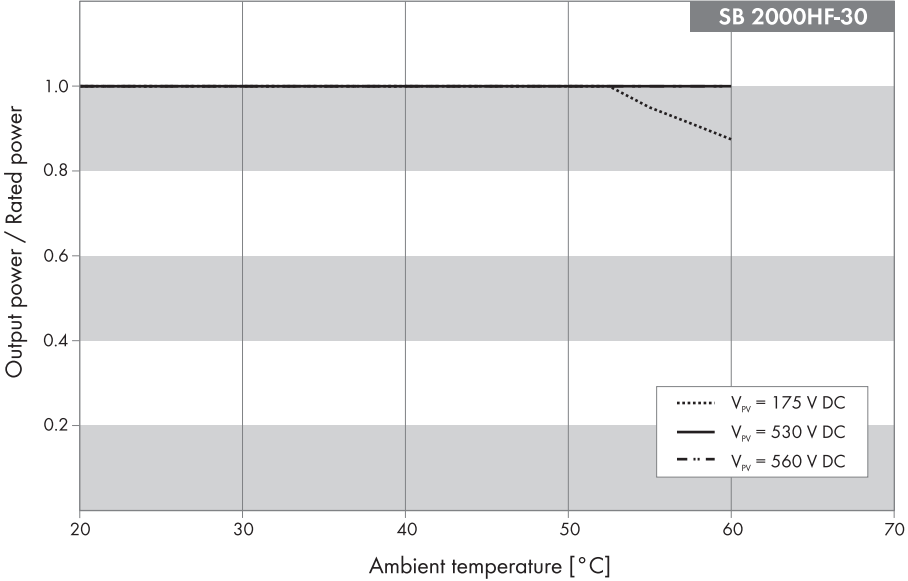

3.9 SB 2100TL

3.9.1 Efficiency

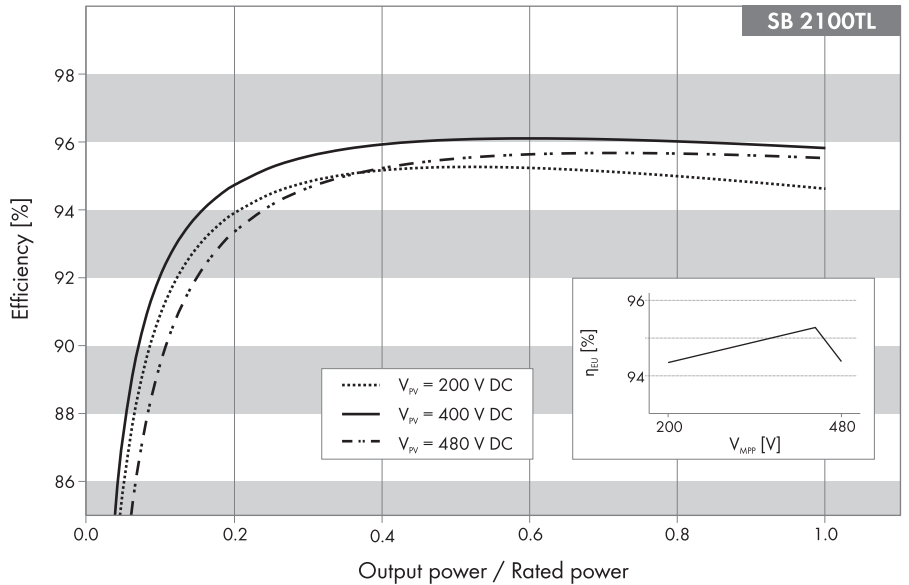


Maximum efficiency, $\eta_{\max}$	96.0%
European efficiency, η_{EU}	95.2%

Efficiency Profile


Standardized output power	Efficiency		
	Minimum MPP voltage 200 V	Rated input voltage 400 V	Maximum MPP voltage 480 V
5%	85.4%	87.0%	82.4%
10%	90.9%	92.0%	89.4%
20%	93.9%	94.7%	93.3%
25%	94.5%	95.2%	94.1%
30%	94.8%	95.6%	94.6%
50%	95.3%	96.0%	95.5%
75%	95.1%	96.0%	95.7%
100%	94.6%	95.8%	95.5%

3.9.2 Derating Behavior

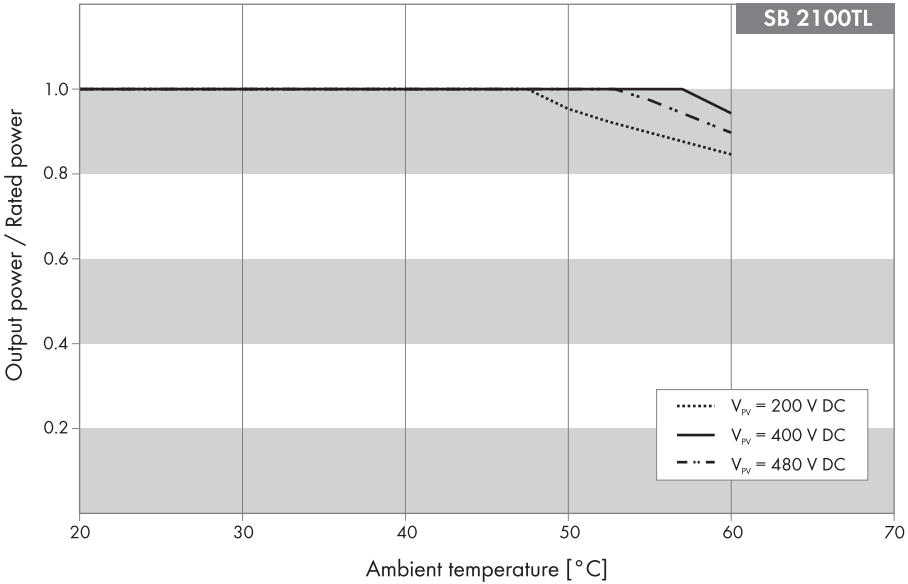

3.10 SB2.5-1VL-40

3.10.1 Efficiency

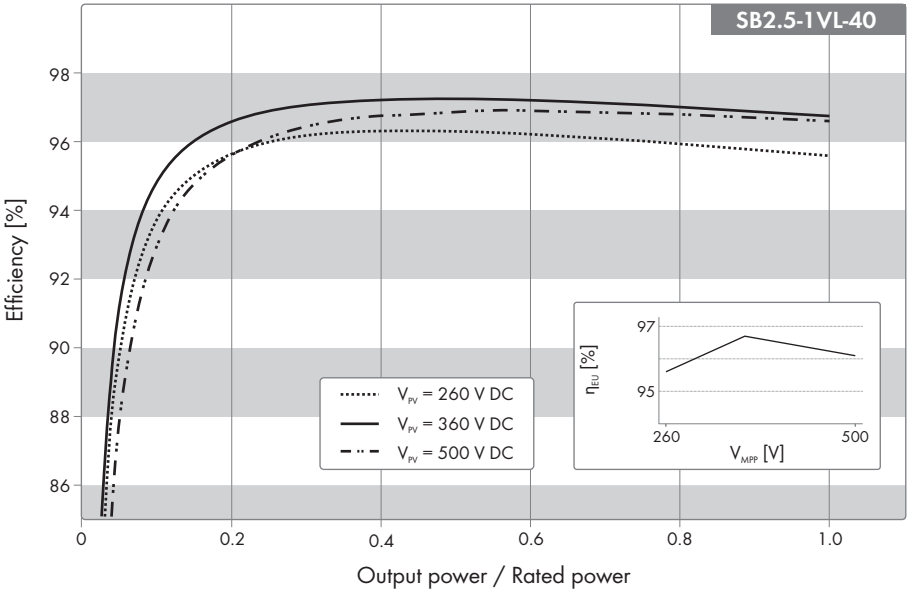


Maximum efficiency, η_{max} 97.2%

European weighted efficiency, η_{EU} 96.7%

Efficiency Profile


Standardized output power	Efficiency		
	Minimum MPP voltage 260 V	Rated input voltage 360 V	Maximum MPP voltage 500 V
5%	89.8%	91.2%	87.8%
10%	93.7%	94.8%	92.9%
20%	95.6%	96.6%	95.6%
25%	96.0%	96.9%	96.1%
30%	96.1%	97.0%	96.4%
50%	96.3%	97.2%	96.9%
75%	96.0%	97.0%	96.8%
100%	95.6%	96.7%	96.6%

3.10.2 Derating Behavior

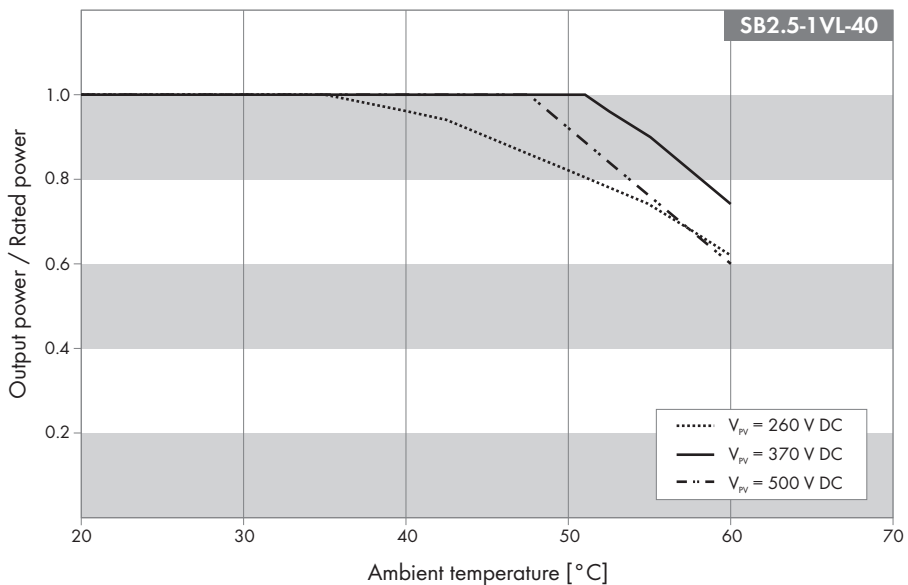

3.11 SB 2500

3.11.1 Efficiency

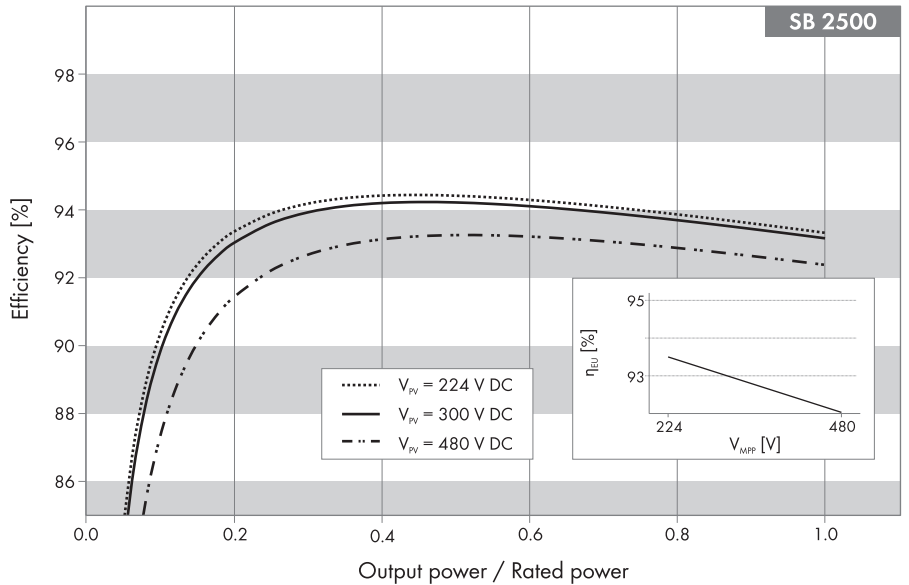


Maximum efficiency, $\eta_{\max}$	94.1%
European efficiency, η_{EU}	93.2%

Efficiency Profile


Standardized output power	Efficiency		
	Minimum MPP voltage 224 V	Rated input voltage 300 V	Maximum MPP voltage 480 V
5%	84.0%	83.2%	79.5%
10%	90.3%	89.8%	87.3%
20%	93.4%	93.0%	91.4%
25%	93.9%	93.6%	92.2%
30%	94.1%	93.9%	92.7%
50%	94.1%	94.1%	93.3%
75%	94.0%	93.8%	93.0%
100%	93.3%	93.2%	92.4%

3.11.2 Derating Behavior

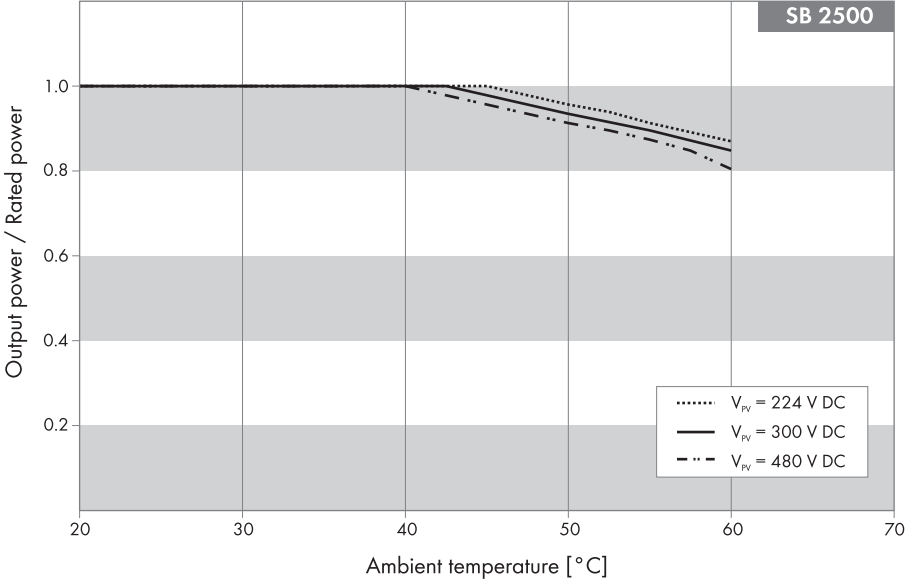

3.12 SB 2500HF-30

3.12.1 Efficiency

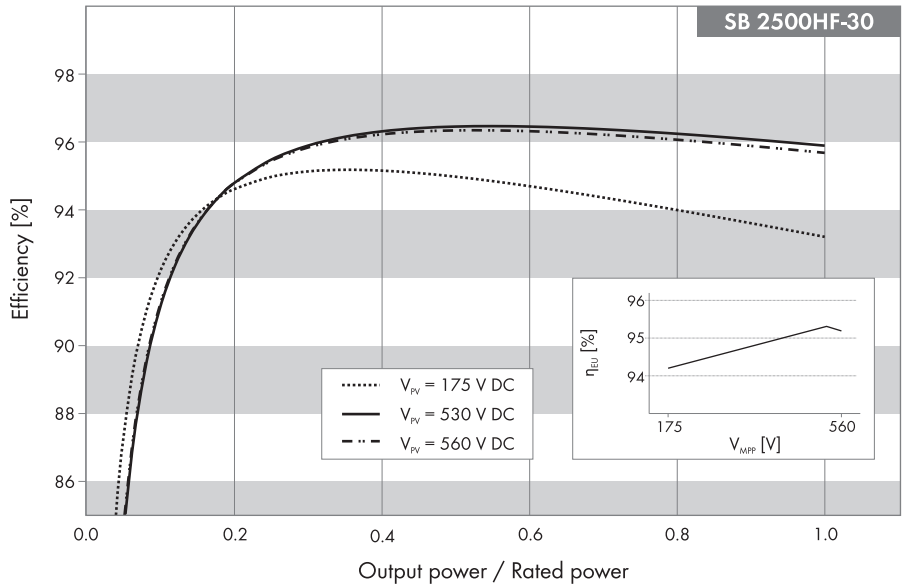


Maximum efficiency, $\eta_{\max}$	96.3%
European efficiency, η_{EU}	95.3%

Efficiency Profile


Standardized output power	Efficiency		
	Minimum MPP voltage 175 V	Rated input voltage 530 V	Maximum MPP voltage 560 V
5%	87.0%	84.4%	84.1%
10%	92.1%	91.2%	91.0%
20%	94.4%	94.8%	94.5%
25%	95.0%	95.6%	95.5%
30%	95.1%	95.8%	95.7%
50%	95.1%	96.3%	96.3%
75%	93.8%	96.2%	96.2%
100%	93.3%	95.8%	95.7%

3.12.2 Derating Behavior

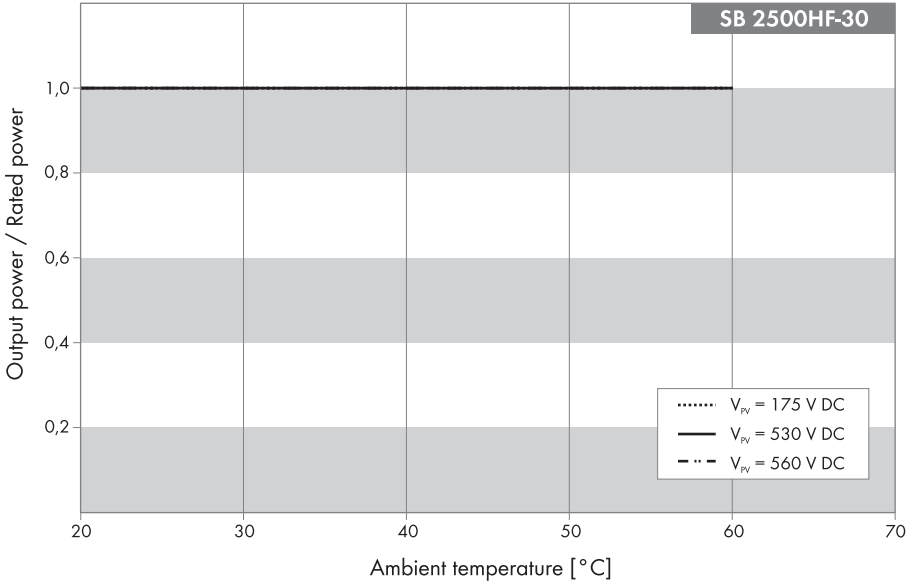

3.13 SB3.0-1AV-40

3.13.1 Efficiency

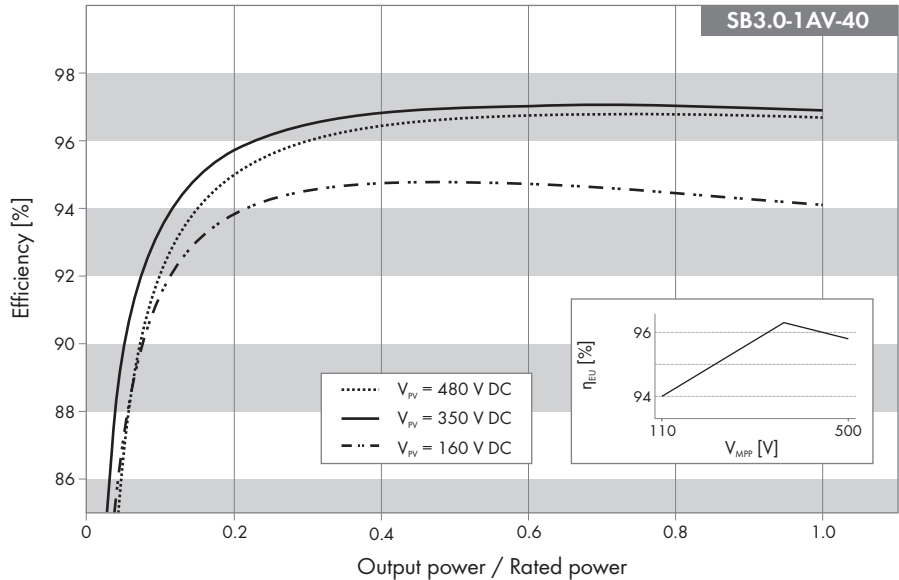


Maximum efficiency, η_{max}	97.0%
European weighted efficiency, η_{EU}	96.3%

Efficiency Profile


Standardized output power	Efficiency		
	Minimum MPP voltage 110 V	Rated input voltage 365 V	Maximum MPP voltage 500 V
5%	86.9%	89.4%	86.1%
10%	91.4%	93.3%	91.9%
20%	93.8%	95.7%	95.0%
25%	94.2%	96.2%	95.6%
30%	94.5%	96.5%	96.0%
50%	94.8%	97.0%	96.6%
75%	94.5%	97.0%	96.8%
100%	94.1%	96.9%	96.7%

3.13.2 Derating Behavior

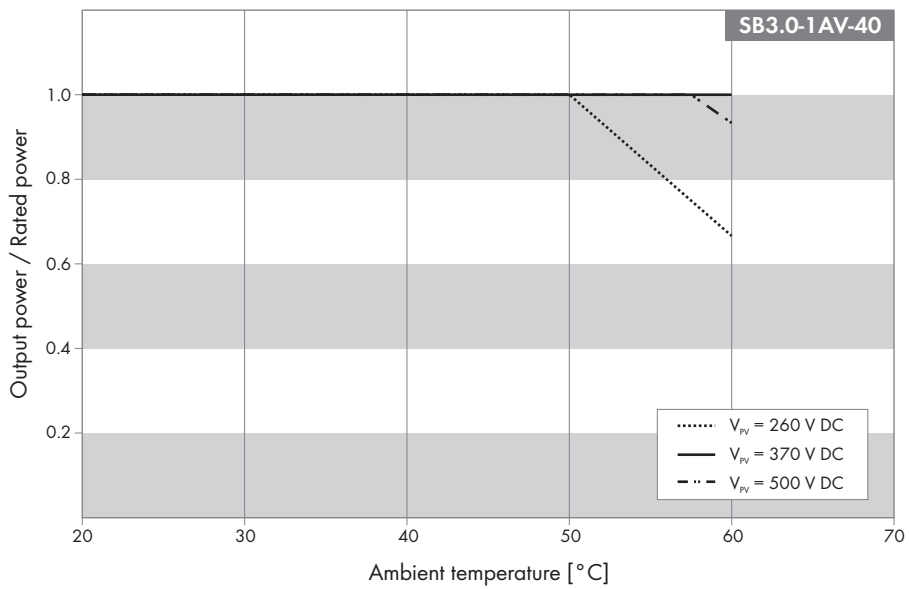

3.14 SB 3000

3.14.1 Efficiency

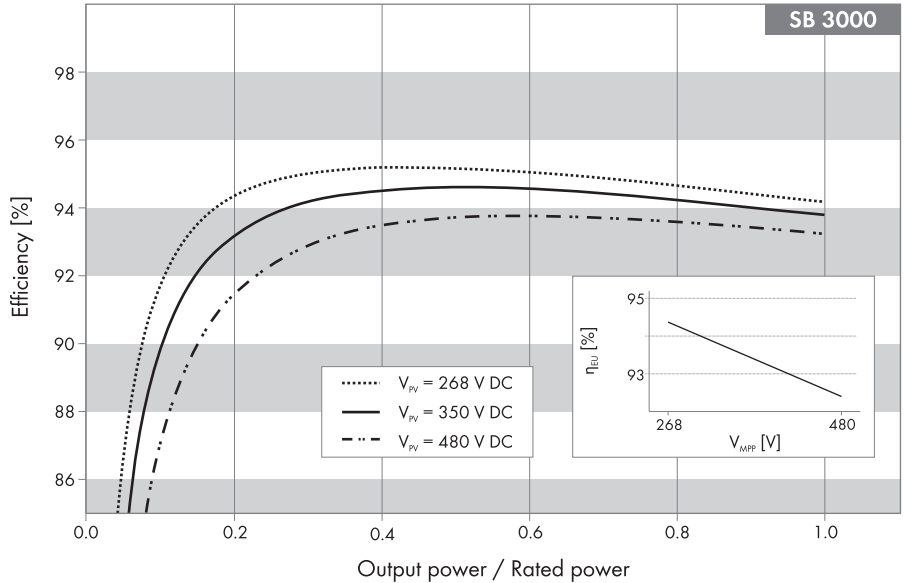


Maximum efficiency, η_{max}	95.0%
European efficiency, η_{EU}	93.6%

Efficiency Profile


Standardized output power	Efficiency		
	Minimum MPP voltage 268 V	Rated input voltage 350 V	Maximum MPP voltage 480 V
5%	86.1%	83.0%	78.9%
10%	91.7%	89.8%	87.0%
20%	94.3%	93.2%	91.4%
25%	94.8%	93.8%	92.3%
30%	95.0%	94.2%	92.9%
50%	95.0%	94.6%	93.7%
75%	94.8%	94.3%	93.7%
100%	94.2%	93.8%	93.3%

3.14.2 Derating Behavior

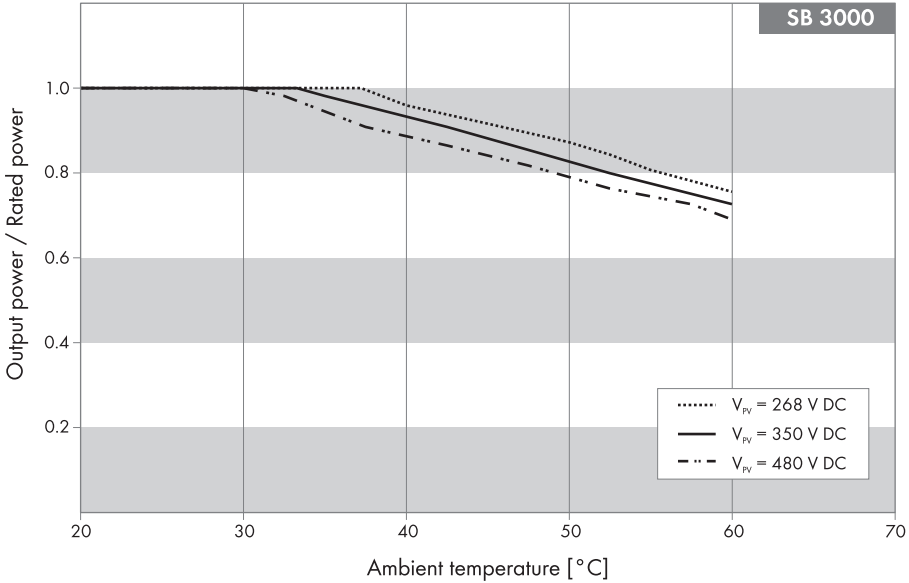

3.15 SB 3000HF-30

3.15.1 Efficiency

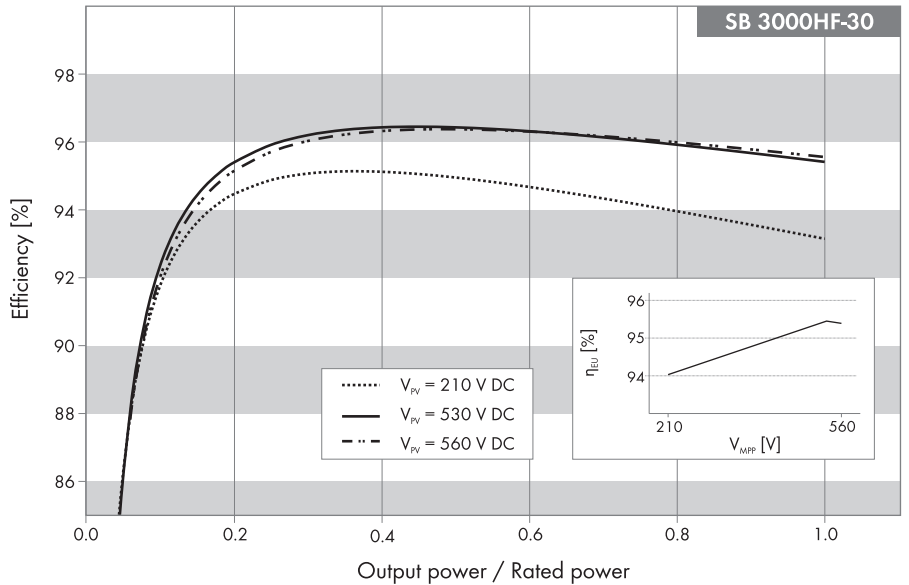


Maximum efficiency, $\eta_{\max}$	96.3%
European efficiency, η_{EU}	95.4%

Efficiency Profile


Standardized output power	Efficiency		
	Minimum MPP voltage 210 V	Rated input voltage 530 V	Maximum MPP voltage 560 V
5%	86.0%	85.9%	85.8%
10%	91.8%	92.3%	91.9%
20%	94.2%	95.3%	95.1%
25%	94.9%	96.0%	95.8%
30%	95.0%	96.1%	95.9%
50%	95.1%	96.3%	96.3%
75%	94.0%	96.0%	96.0%
100%	93.2%	95.4%	95.5%

3.15.2 Derating Behavior

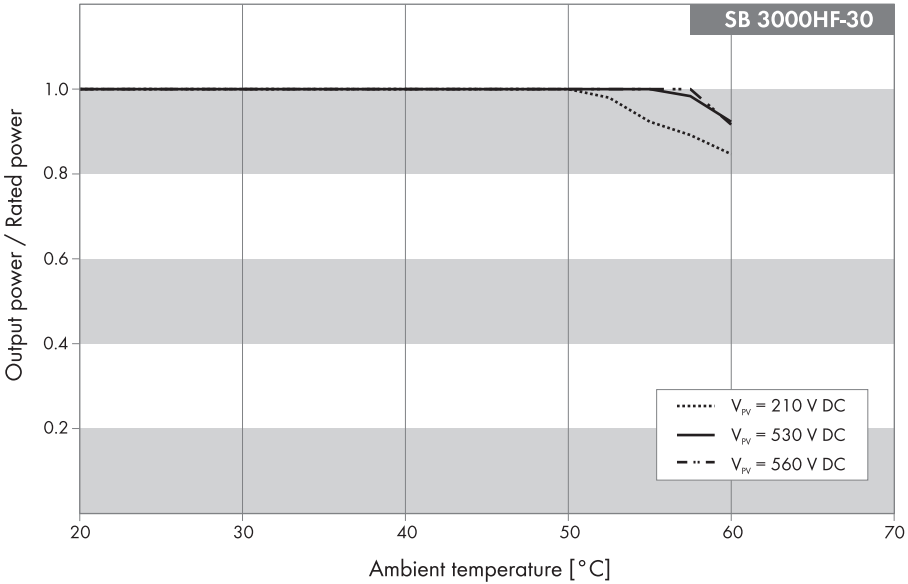

3.16 SB 3000TL-20

3.16.1 Efficiency

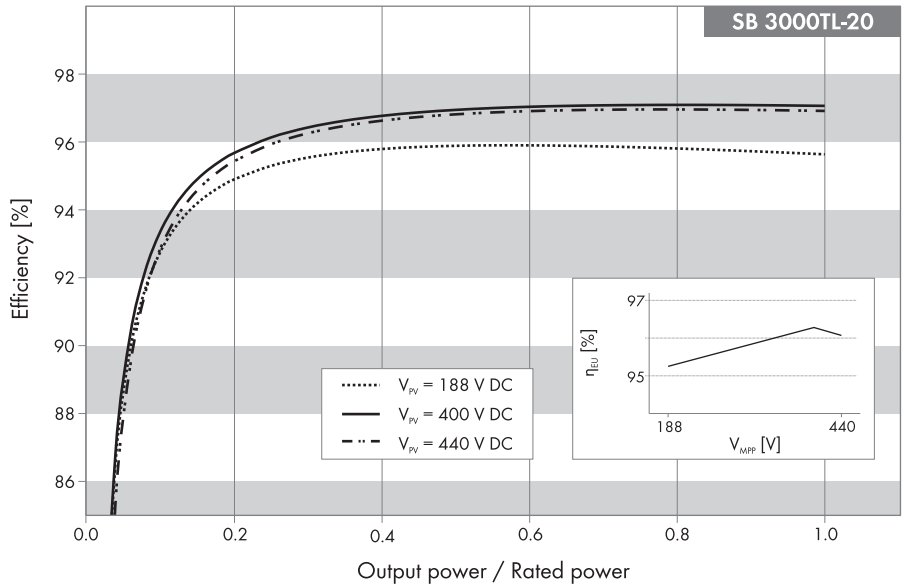


Maximum efficiency, η_{max}	97.0%
European efficiency, η_{EU}	96.3%

Efficiency Profile


Standardized output power	Efficiency		
	Minimum MPP voltage 188 V	Rated input voltage 400 V	Maximum MPP voltage 440 V
5%	88.2%	88.5%	87.4%
10%	92.7%	93.3%	92.8%
20%	94.4%	95.7%	95.4%
25%	95.3%	96.1%	95.9%
30%	95.5%	96.4%	96.2%
50%	95.9%	96.9%	96.8%
75%	95.8%	97.0%	97.0%
100%	95.6%	97.0%	96.9%

3.16.2 Derating Behavior

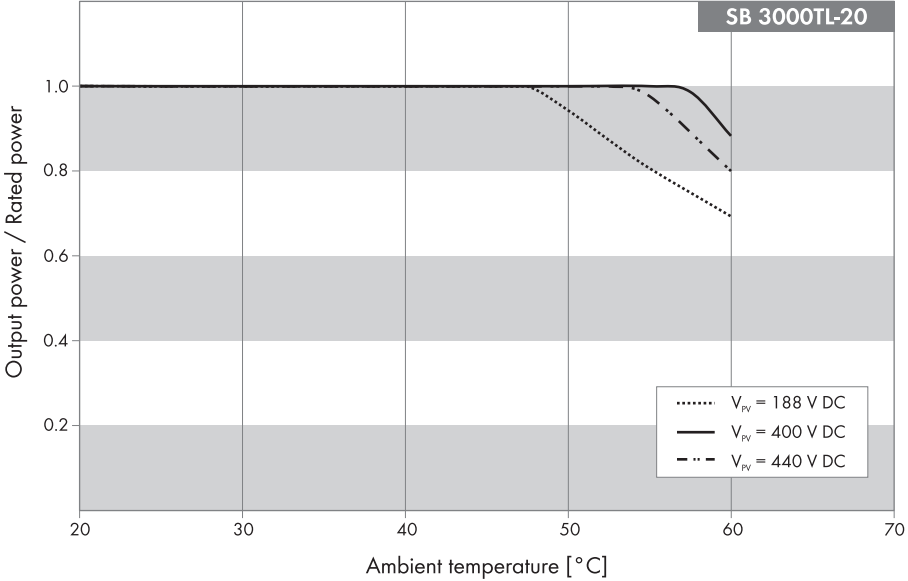

3.17 SB 3000TL-21

3.17.1 Efficiency

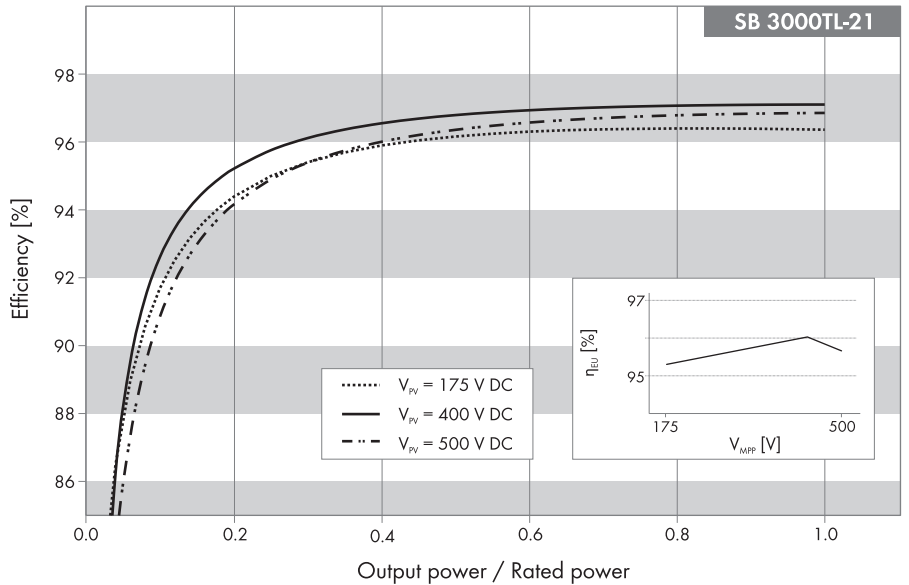


Maximum efficiency, $\eta_{\max}$	97.1%
European efficiency, η_{EU}	96.0%

Efficiency Profile


Standardized output power	Efficiency		
	Minimum MPP voltage 175 V	Rated input voltage 400 V	Maximum MPP voltage 500 V
5%	87.7%	87.8%	85.6%
10%	91.7%	92.6%	90.8%
20%	94.4%	95.2%	94.1%
25%	95.0%	95.7%	94.9%
30%	95.4%	96.1%	95.4%
50%	96.1%	96.8%	96.3%
75%	96.4%	97.0%	96.7%
100%	96.3%	97.1%	96.8%

3.17.2 Derating Behavior

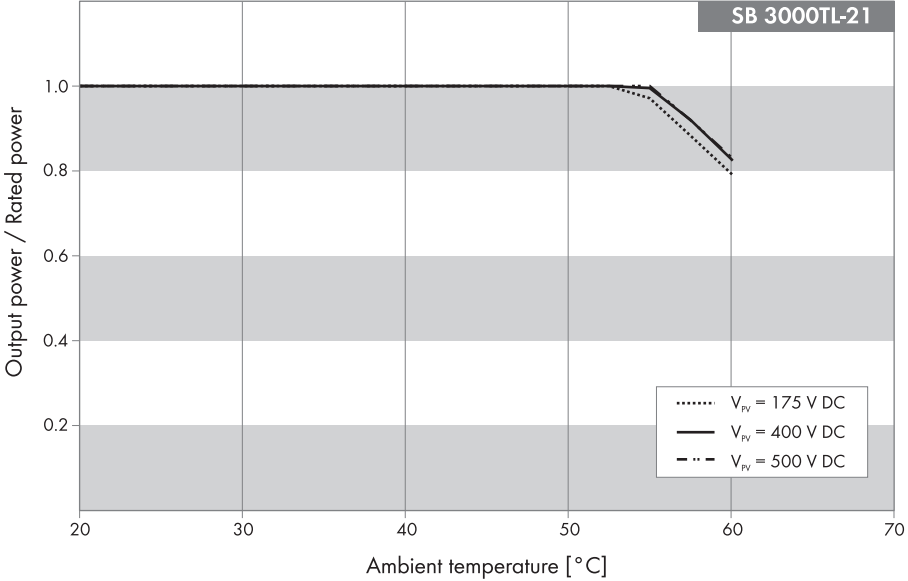

3.18 SB 3300 / SB 3300-11

3.18.1 Efficiency

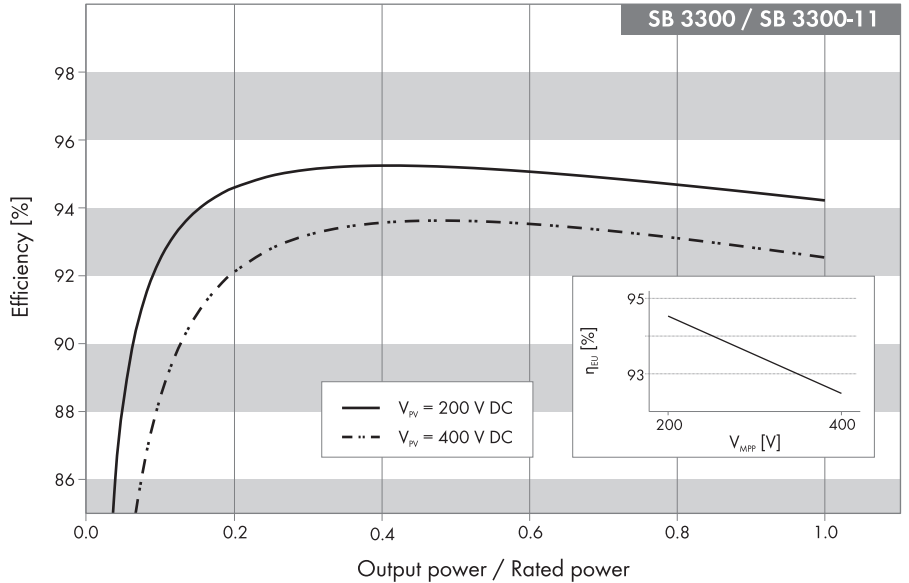


Maximum efficiency, $\eta_{\max}$	95.2%
European efficiency, η_{EU}	94.4%

Efficiency Profile


Standardized output power	Efficiency	
	Minimum MPP voltage / rated input voltage 200 V	Maximum MPP voltage 400 V
5%	87.8%	81.4%
10%	92.5%	88.4%
20%	94.6%	92.1%
25%	94.9%	92.8%
30%	95.1%	93.2%
50%	95.2%	93.6%
75%	94.8%	93.2%
100%	94.2%	92.5%

3.18.2 Derating Behavior

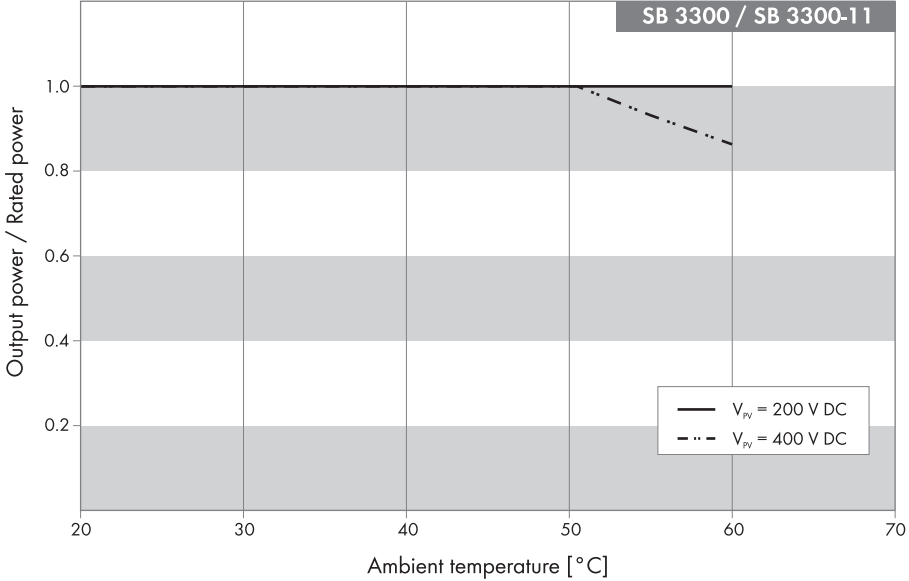

3.19 SB3.6-1AV-40

3.19.1 Efficiency

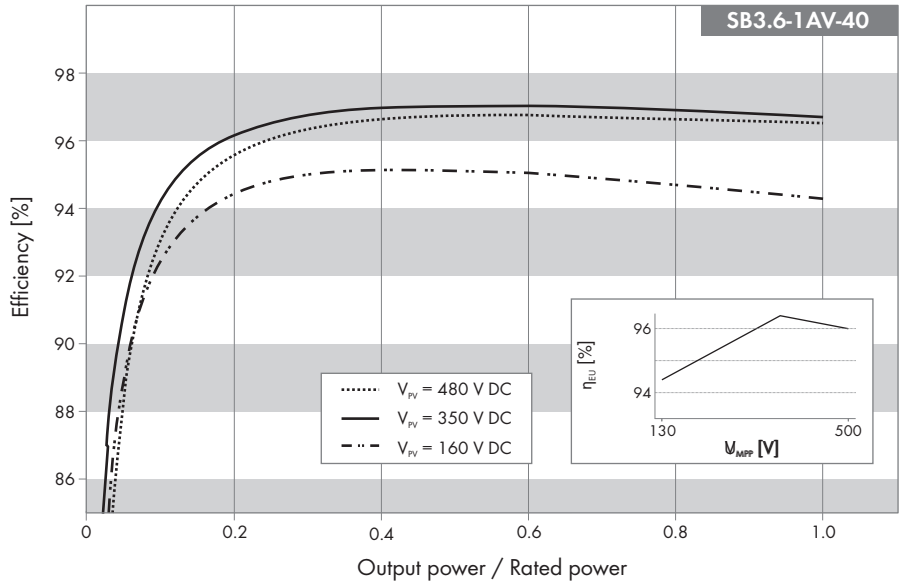


Maximum efficiency, $\eta_{\max}$	97.0%
European weighted efficiency, η_{EU}	96.4%

Efficiency Profile


Standardized output power	Efficiency		
	Minimum MPP voltage 130 V	Rated input voltage 365 V	Maximum MPP voltage 500 V
5%	88.7%	90.7%	88.2%
10%	92.4%	94.2%	93.0%
20%	94.4%	96.1%	95.5%
25%	94.8%	96.5%	96.0%
30%	95.0%	96.7%	96.3%
50%	95.1%	97.0%	96.7%
75%	94.8%	96.9%	96.7%
100%	94.3%	96.7%	96.5%

3.19.2 Derating Behavior

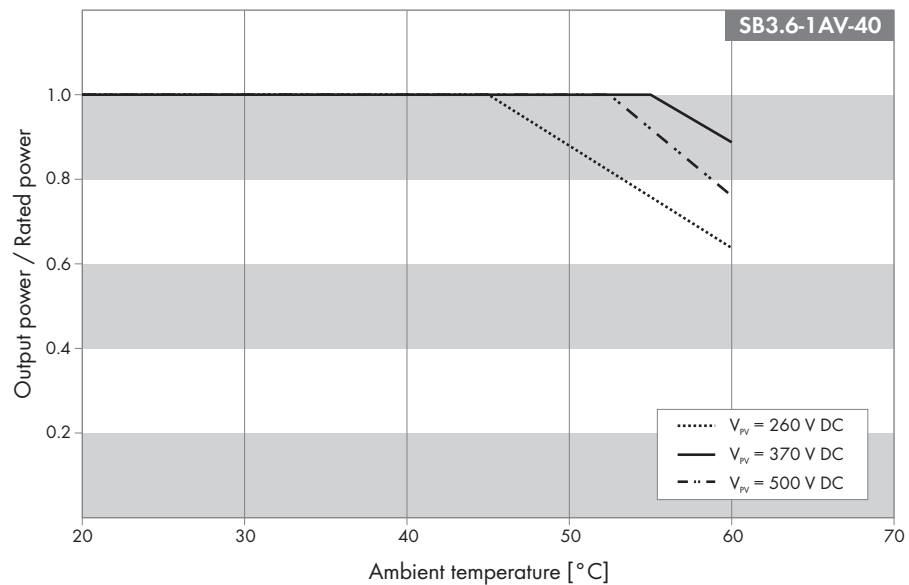

3.20 SB 3600SE-10

3.20.1 PV Efficiency

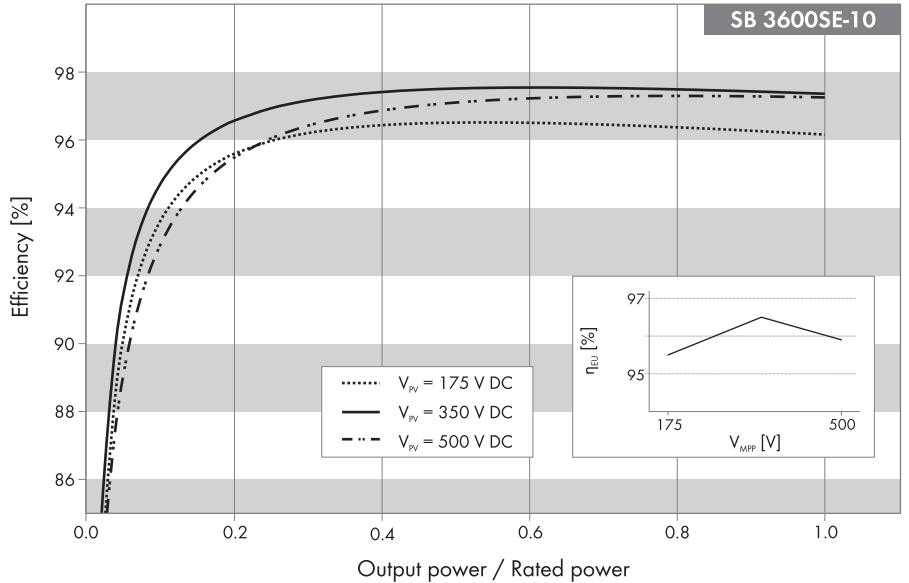

Maximum efficiency, $\eta_{\max}$	97.1%
European efficiency, η_{EU}	96.5%

Efficiency Profile

Standardized output power	Efficiency		
	Minimum MPP voltage 175 V	Rated input voltage 350 V	Maximum MPP voltage 500 V
5%	89.8%	91.2%	88.8%
10%	93.3%	94.4%	92.6%
20%	95.2%	96.2%	95.1%
25%	95.6%	96.5%	95.7%
30%	95.8%	96.8%	96.0%
50%	96.1%	97.1%	96.7%
75%	96.0%	97.1%	96.9%
100%	95.8%	96.9%	96.8%

3.20.2 Charge / Discharge Efficiency

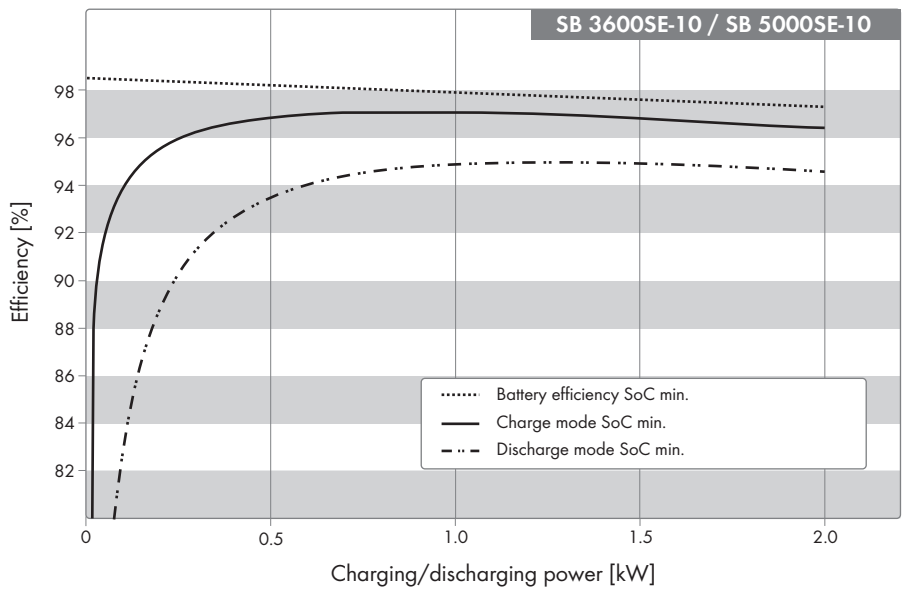


Figure 1: Charge/discharge efficiency SoC min


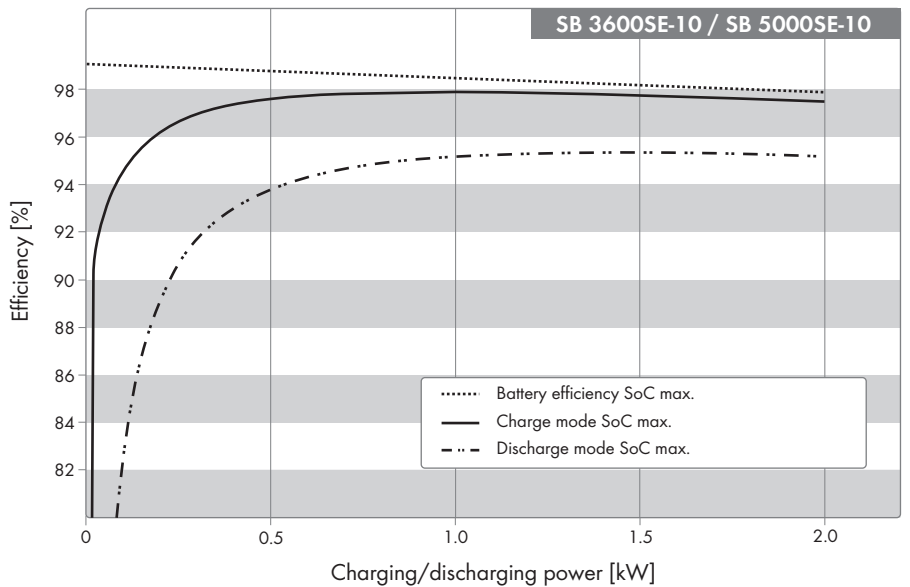


Figure 2: Charge/discharge efficiency SoC max


Maximum efficiency	
Charge mode (PV → battery) SoC max	98.0%
Charge mode (PV → battery) SoC min	97.2%
Discharge mode (battery → utility grid) SoC max	95.4%
Discharge mode (battery → utility grid) SoC min	95.0%
Battery efficiency SoC max	99.1%
Battery efficiency SoC min	98.5%

3.20.3 Derating Behavior

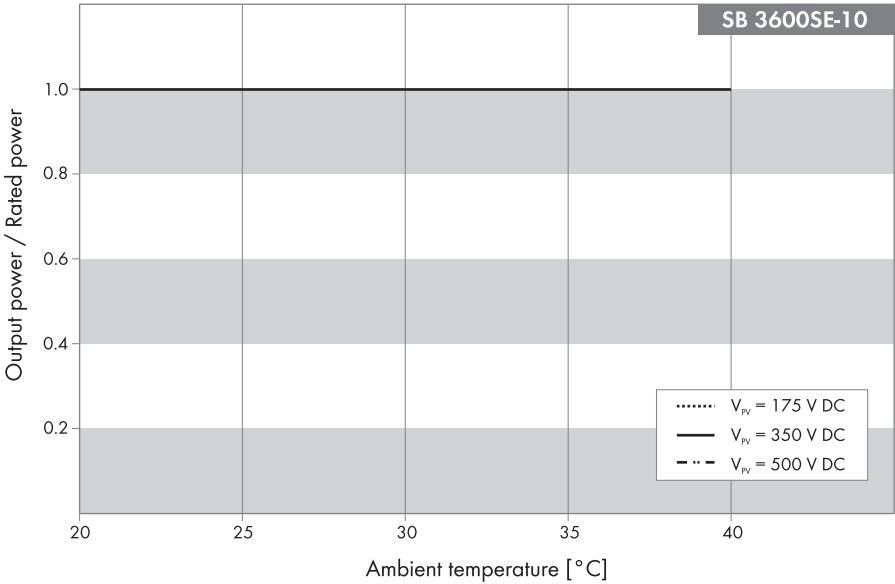

3.21 SB 3600TL-21

3.21.1 Efficiency

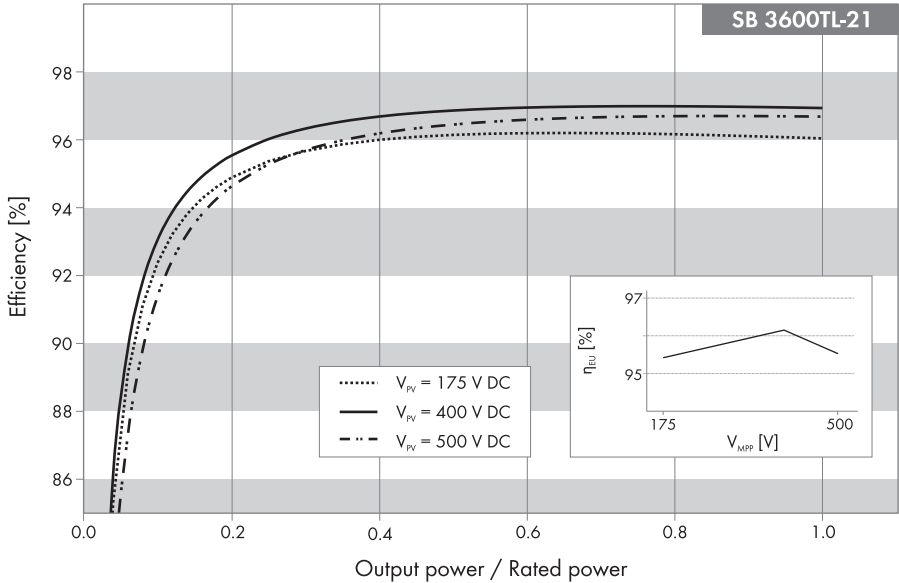


Maximum efficiency, η_{max}	97.0%
European efficiency, η_{EU}	96.1%

Efficiency Profile


Standardized output power	Efficiency		
	Minimum MPP voltage 175 V	Rated input voltage 400 V	Maximum MPP voltage 500 V
5%	87.2%	88.0%	85.0%
10%	92.4%	93.0%	91.4%
20%	94.6%	95.5%	94.9%
25%	95.3%	96.0%	95.4%
30%	95.7%	96.3%	95.7%
50%	96.4%	96.9%	96.1%
75%	96.7%	97.0%	96.2%
100%	96.7%	96.6%	96.0%

3.21.2 Derating Behavior

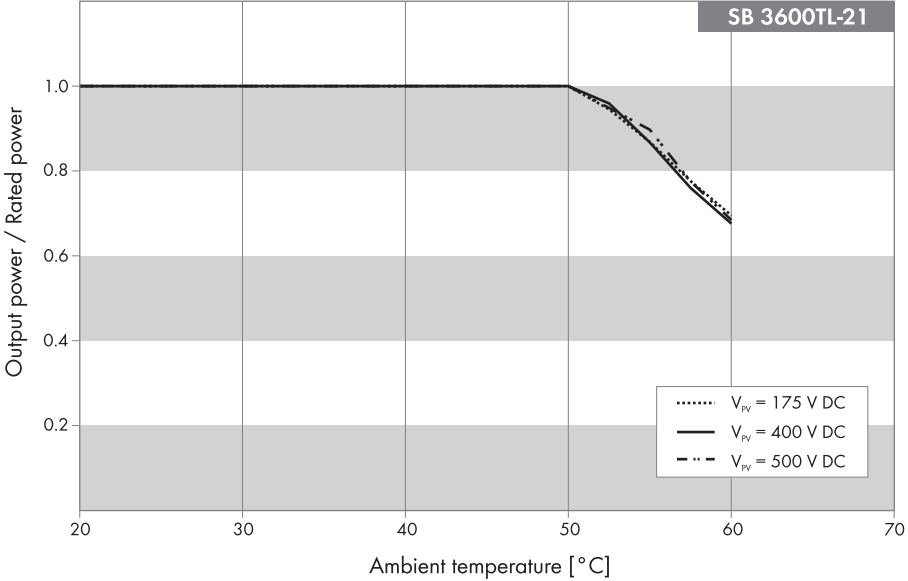

3.22 SB 3800 / SB 3800-11

3.22.1 Efficiency

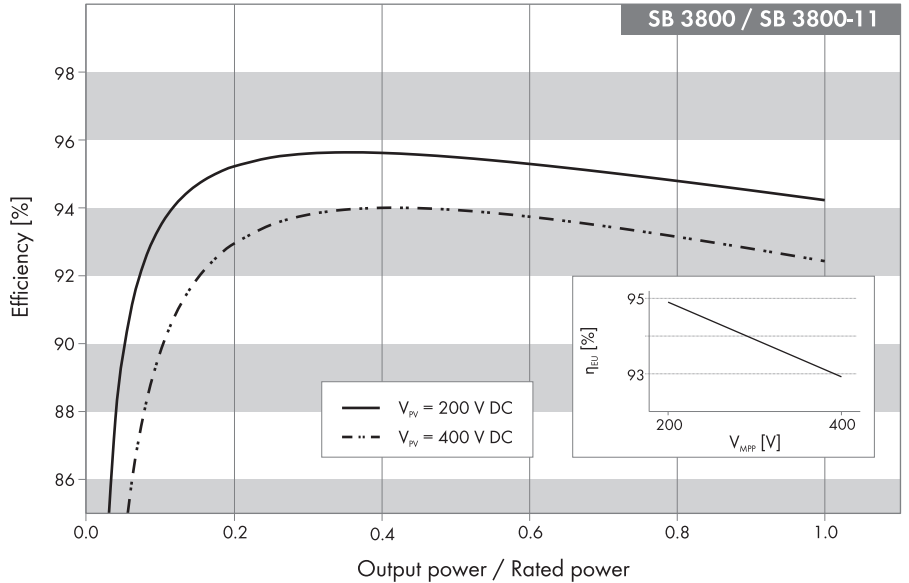


Maximum efficiency, η_{max}	95.6%
European efficiency, η_{EU}	94.7%

Efficiency Profile


Standardized output power	Efficiency	
	Minimum MPP voltage / rated input voltage 200 V	Maximum MPP voltage 400 V
5%	89.3%	83.3%
10%	93.4%	89.7%
20%	95.2%	92.9%
25%	95.5%	93.5%
30%	95.6%	93.8%
50%	95.4%	93.9%
75%	94.8%	93.3%
100%	94.1%	92.4%

3.22.2 Derating Behavior

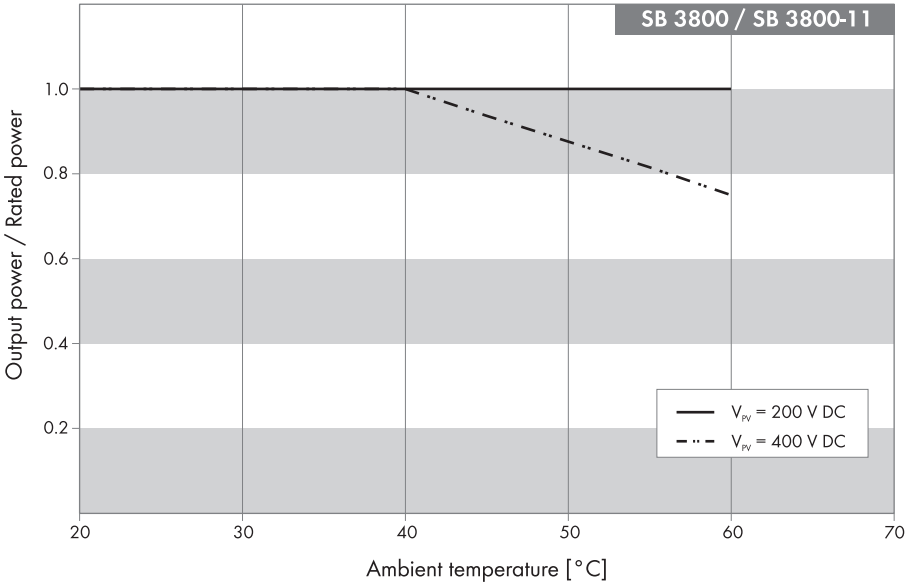

3.23 SB4.0-1AV-40

3.23.1 Efficiency

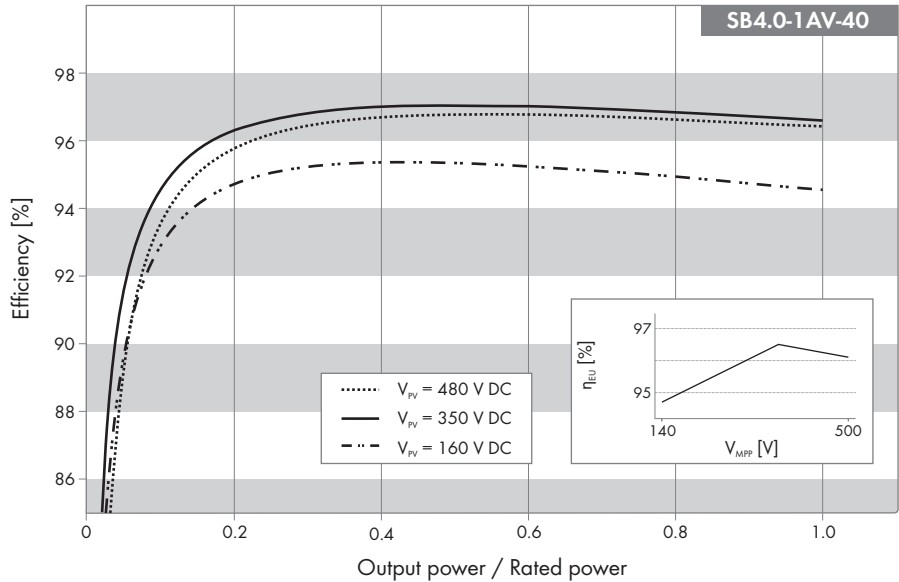


Maximum efficiency, $\eta_{\max}$ 97.0%

European weighted efficiency, η_{EU} 96.5%

Efficiency Profile


Standardized output power	Efficiency		
	Minimum MPP voltage 140 V	Rated input voltage 365 V	Maximum MPP voltage 500 V
5%	89.4%	91.2%	88.9%
10%	92.8%	94.5%	93.4%
20%	94.7%	96.3%	95.7%
25%	95.0%	96.6%	96.2%
30%	96.2%	96.8%	96.4%
50%	95.3%	97.0%	96.8%
75%	95.0%	96.9%	96.7%
100%	94.5%	96.6%	96.4%

3.23.2 Derating Behavior

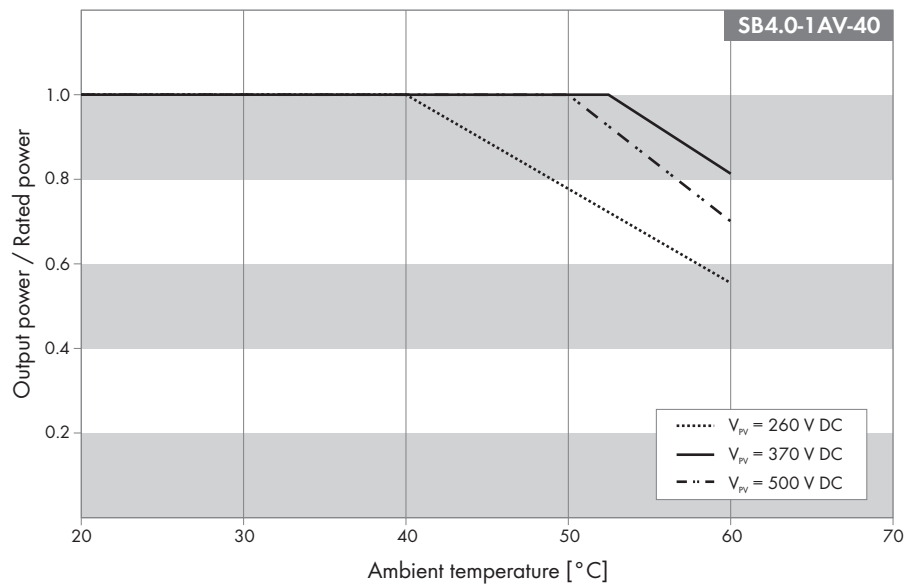

3.24 SB 4000TL-20

3.24.1 Efficiency

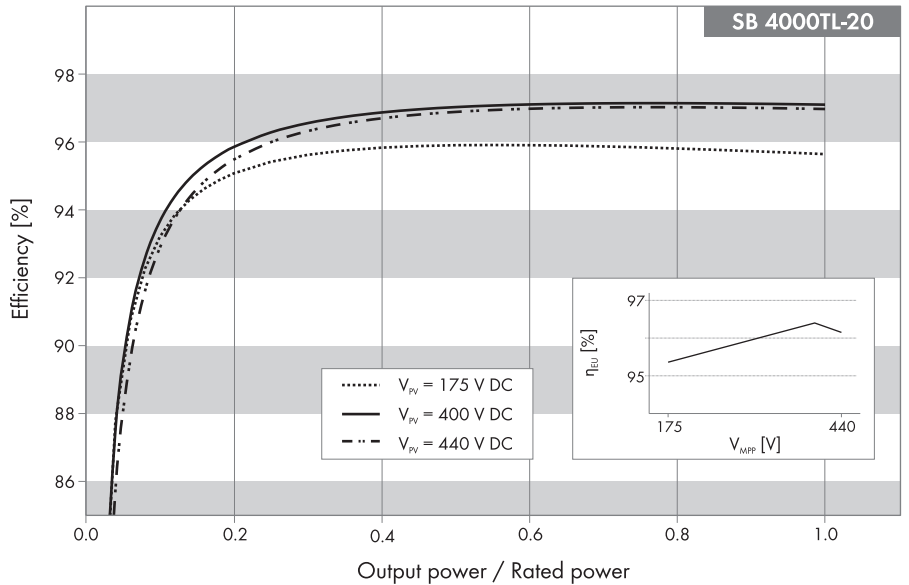


Maximum efficiency, $\eta_{\max}$	97.0%
European efficiency, η_{EU}	96.4%

Efficiency Profile


Standardized output power	Efficiency		
	Minimum MPP voltage 175 V	Rated input voltage 400 V	Maximum MPP voltage 440 V
5%	89.3%	89.2%	87.6%
10%	93.2%	93.7%	92.9%
20%	95.1%	95.9%	95.5%
25%	95.4%	96.3%	96.0%
30%	95.6%	96.6%	96.3%
50%	95.0%	97.0%	96.9%
75%	95.8%	97.0%	96.9%
100%	95.6%	97.0%	96.9%

3.24.2 Derating Behavior

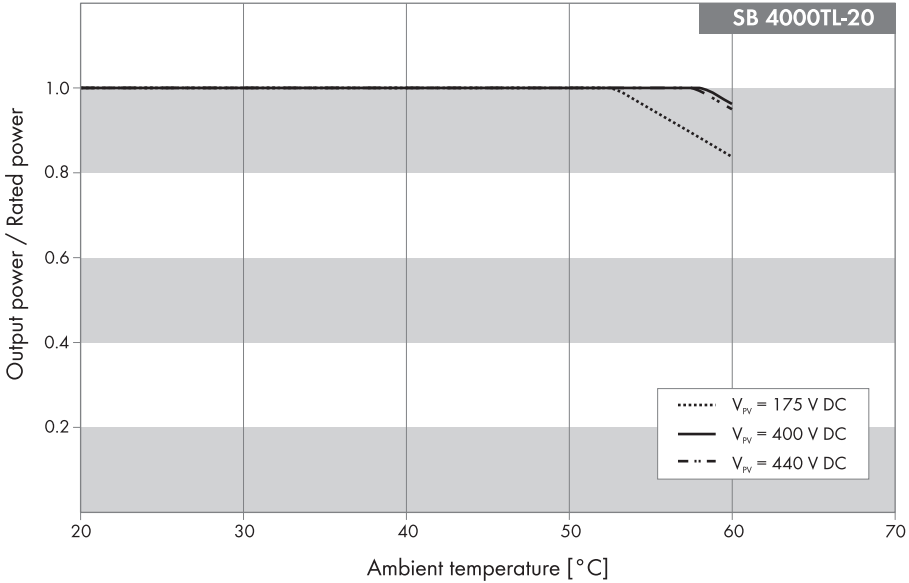

3.25 SB 4000TL-21

3.25.1 Efficiency

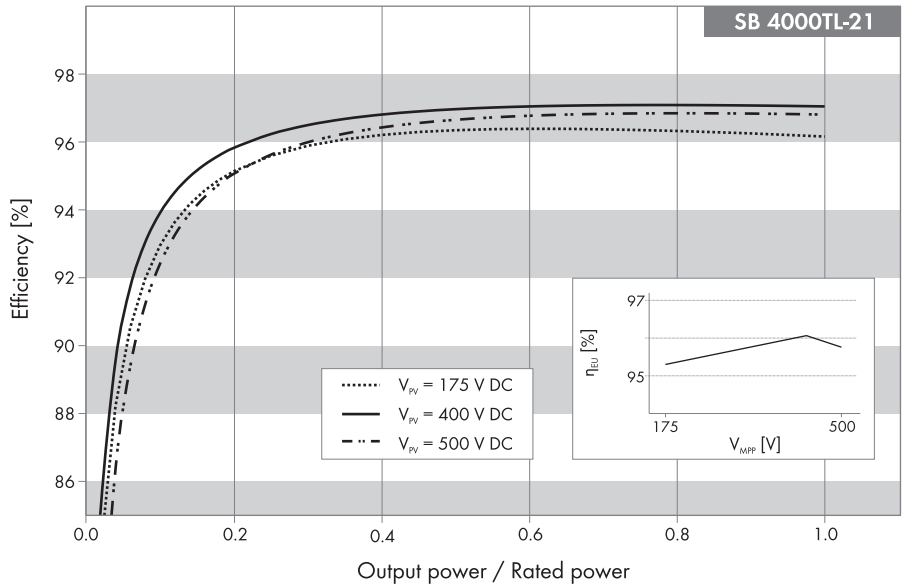


Maximum efficiency, η_{max}	97.1%
European efficiency, η_{EU}	96.4%

Efficiency Profile


Standardized output power	Efficiency		
	Minimum MPP voltage 175 V	Rated input voltage 400 V	Maximum MPP voltage 500 V
5%	89.4%	90.6%	89.9%
10%	92.9%	93.9%	92.4%
20%	95.1%	95.8%	95.1%
25%	95.6%	96.2%	95.6%
30%	95.9%	96.5%	96.0%
50%	96.3%	97.0%	96.6%
75%	96.3%	97.1%	96.8%
100%	96.1%	97.0%	96.8%

3.25.2 Derating Behavior

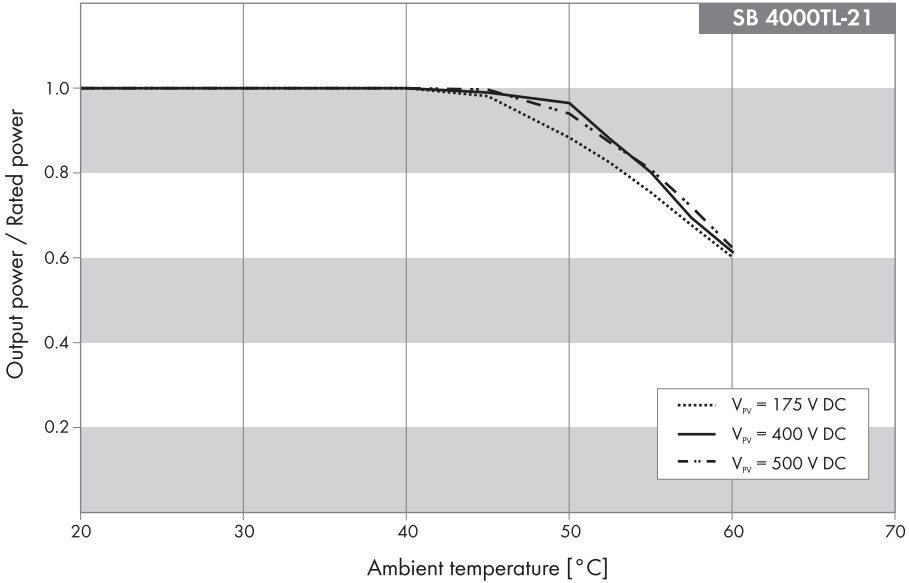

3.26 SB5.0-1AV-40

3.26.1 Efficiency

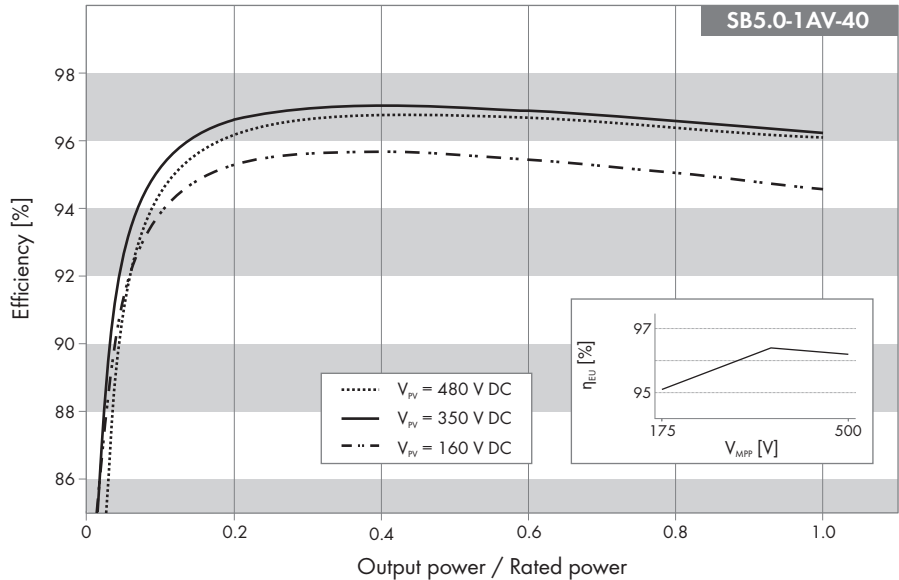


Maximum efficiency, $\eta_{\max}$	97.0%
European weighted efficiency, η_{EU}	96.5%

Efficiency Profile


Standardized output power	Efficiency		
	Minimum MPP voltage 175 V	Rated input voltage 365 V	Maximum MPP voltage 500 V
5%	91.2%	92.5%	90.7%
10%	93.8%	95.2%	94.4%
20%	95.3%	96.6%	96.2%
25%	95.5%	96.8%	96.5%
30%	95.6%	97.0%	96.6%
50%	95.6%	97.0%	96.8%
75%	95.2%	96.7%	96.5%
100%	94.6%	96.2%	96.1%

3.26.2 Derating Behavior

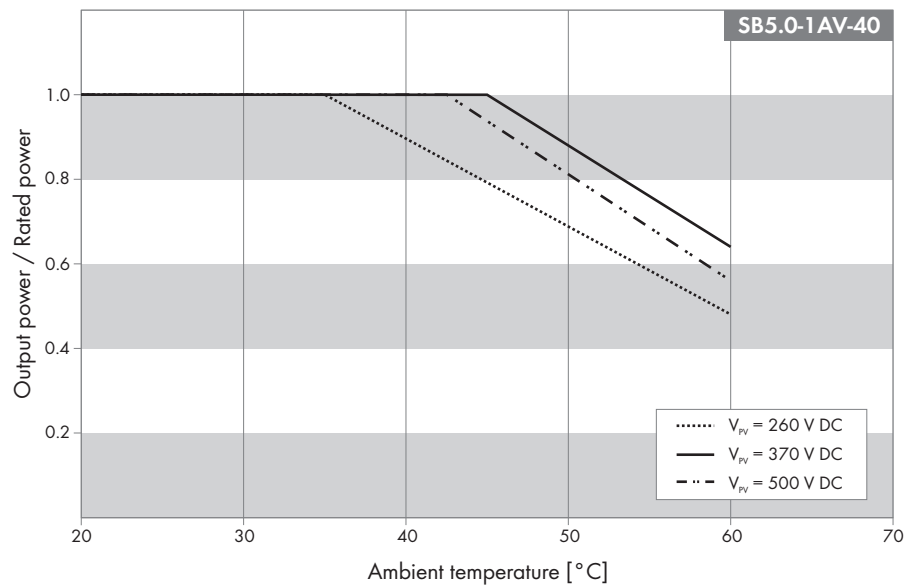

3.27 SB 5000SE-10

3.27.1 PV Efficiency

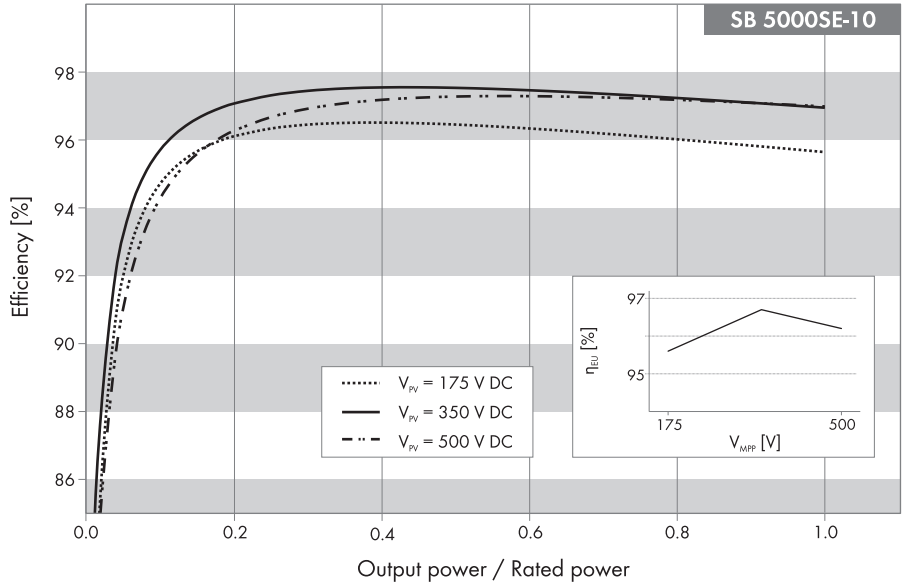

Maximum efficiency, $\eta_{\max}$	97.1%
European efficiency, η_{EU}	96.7%

Efficiency Profile

Standardized output power	Efficiency		
	Minimum MPP voltage 175 V	Rated input voltage 350 V	Maximum MPP voltage 500 V
5%	91.7%	92.9%	90.8%
10%	94.4%	95.3%	94.0%
20%	95.7%	96.7%	95.9%
25%	96.0%	96.9%	96.3%
30%	96.1%	97.0%	96.5%
50%	96.1%	97.1%	96.9%
75%	95.7%	96.9%	96.8%
100%	95.3%	96.6%	96.6%

3.27.2 Charge / Discharge Efficiency

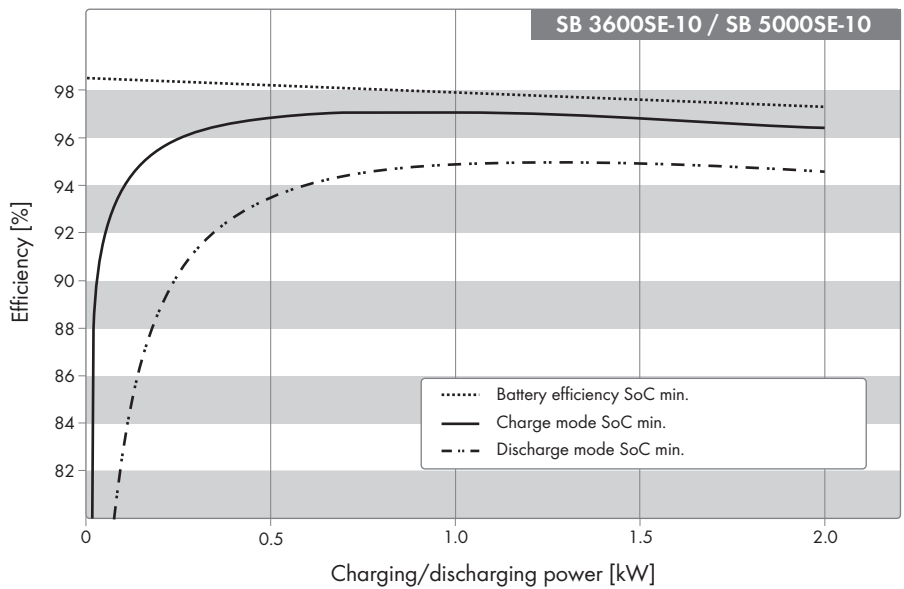


Figure 3: Charge/discharge efficiency SoC min


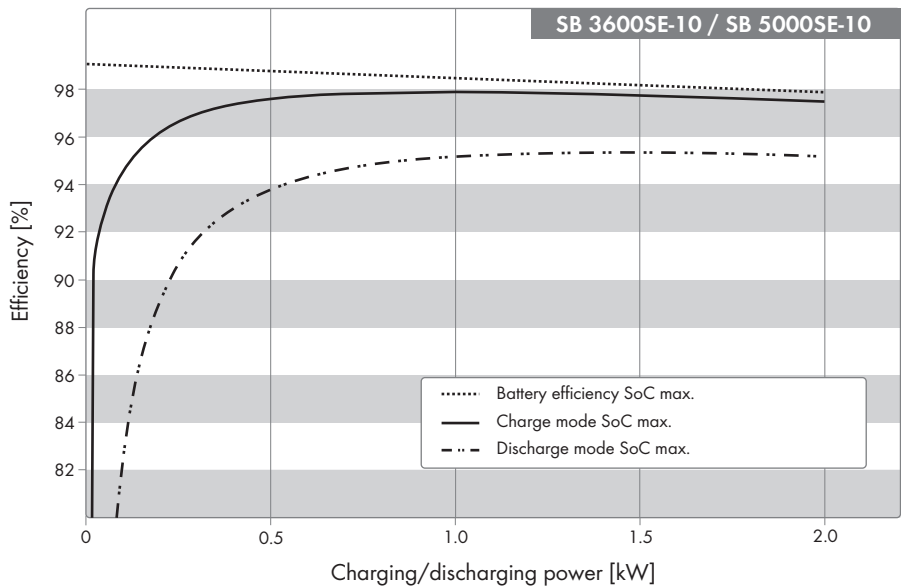


Figure 4: Charge/discharge efficiency SoC max


Maximum efficiency	
Charge mode (PV → battery) SoC max	98.0%
Charge mode (PV → battery) SoC min	97.2%
Discharge mode (battery → utility grid) SoC max	95.4%
Discharge mode (battery → utility grid) SoC min	95.0%
Battery efficiency SoC max	99.1%
Battery efficiency SoC min	98.5%

3.27.3 Derating Behavior

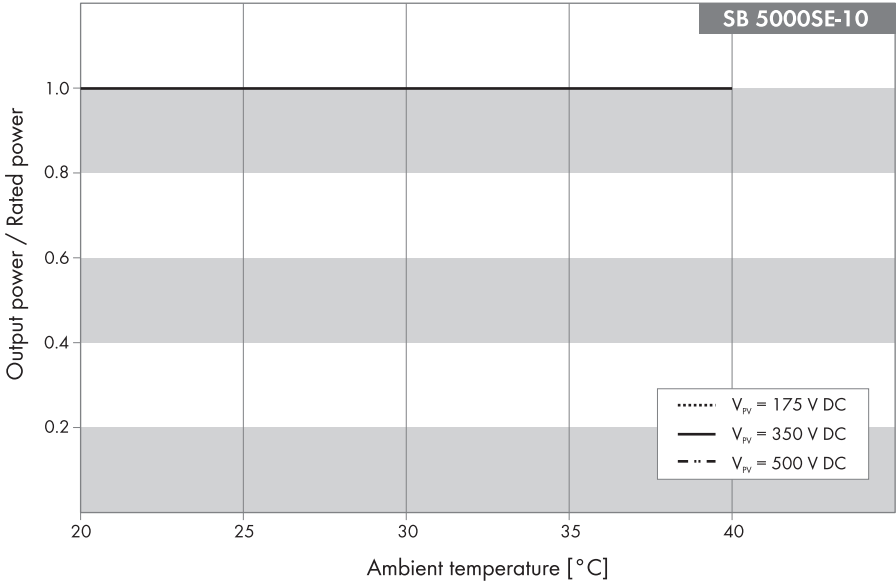

3.28 SB 5000TL-20

3.28.1 Efficiency

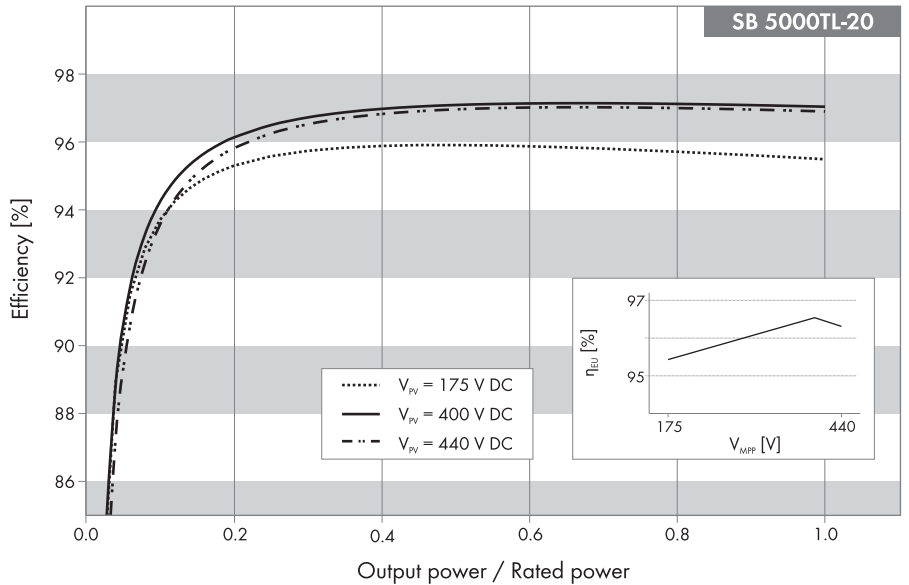


Maximum efficiency, $\eta_{\max}$	97.0%
European efficiency, η_{EU}	96.5%

Efficiency Profile


Standardized output power	Efficiency		
	Minimum MPP voltage 175 V	Rated input voltage 400 V	Maximum MPP voltage 440 V
5%	90.2%	90.3%	88.9%
10%	93.7%	94.2%	93.6%
20%	95.3%	96.1%	95.8%
25%	95.6%	96.5%	96.3%
30%	95.7%	96.7%	96.5%
50%	95.9%	97.0%	97.0%
75%	95.8%	97.0%	97.0%
100%	95.5%	97.0%	96.9%

3.28.2 Derating Behavior

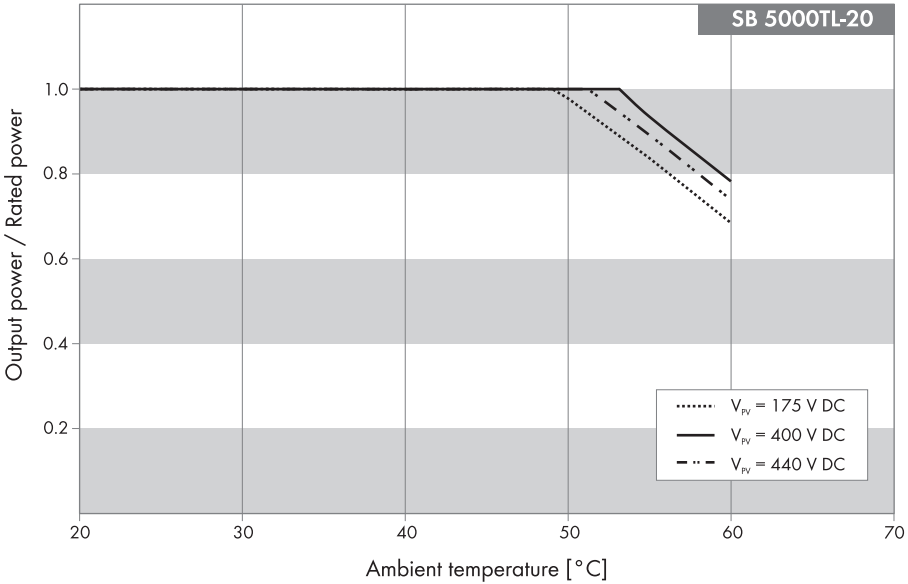

3.29 SB 5000TL-21

3.29.1 Efficiency

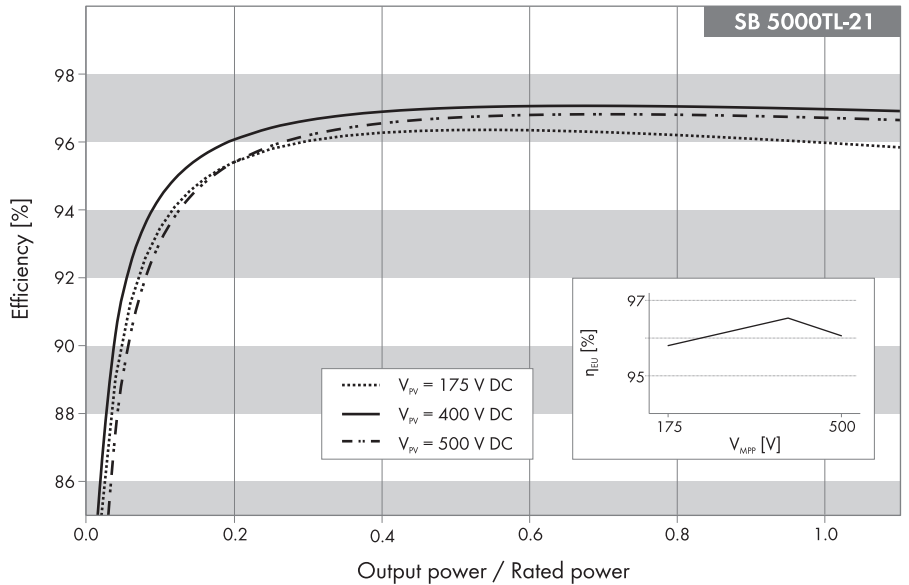


Maximum efficiency, η_{max}	97.1%
European weighted efficiency, η_{EU}	96.5%

Efficiency Profile

Standardized output power	Efficiency		
	Minimum MPP voltage 175 V	Rated input voltage 400 V	Maximum MPP voltage 500 V
5%	90.2%	91.4%	88.9%
10%	93.5%	94.4%	93.1%
20%	95.4%	96.1%	95.4%
25%	95.8%	96.4%	95.9%
30%	96.1%	96.7%	96.2%
50%	96.4%	97.0%	96.7%
75%	96.3%	97.1%	96.8%
100%	96.0%	97.0%	96.7%


3.29.2 Derating Behavior

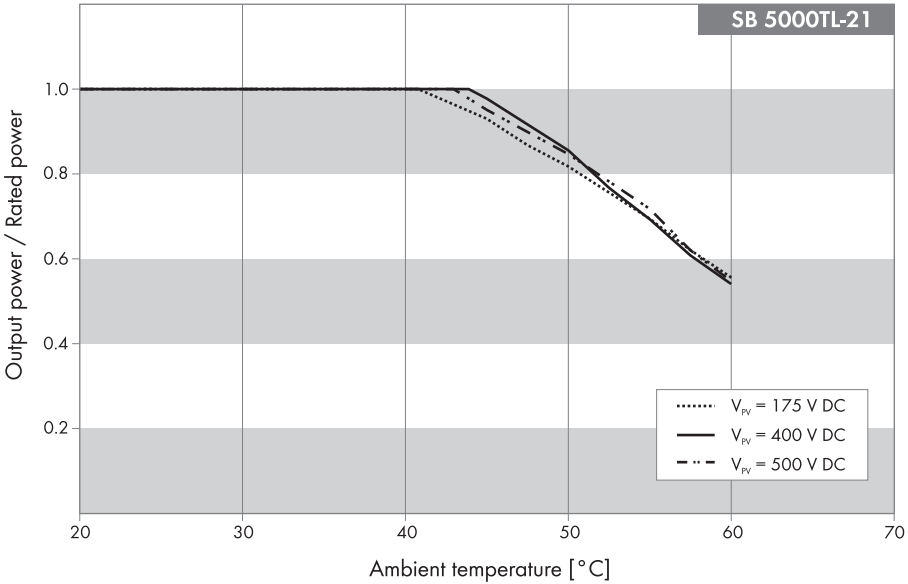

4 Sunny Boy Storage

4.1 SBS2.5-1VL-10

4.1.1 DC Efficiency

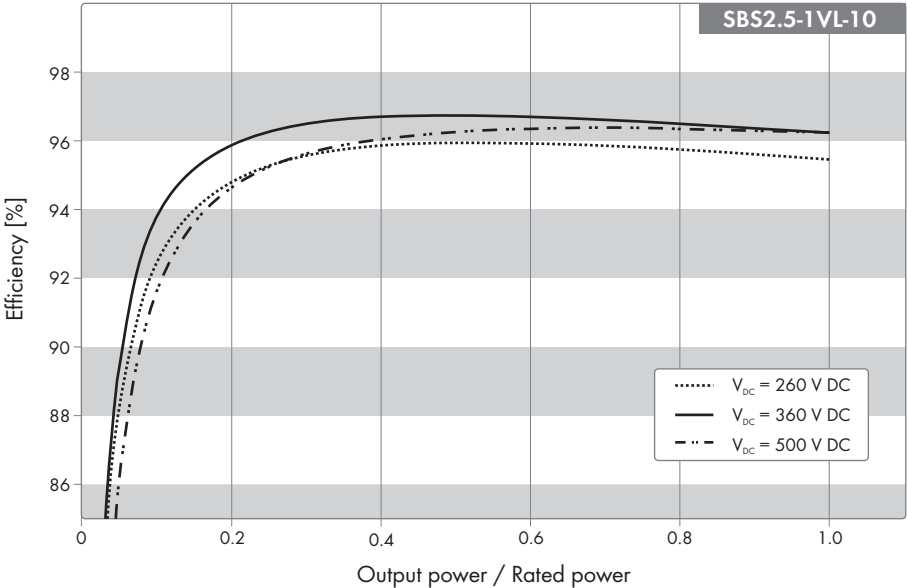

Maximum efficiency, η_{max} 96.7%


European weighted efficiency, η_{EU} 96.1%

Efficiency Profile

Standardized output power	Efficiency		
	Minimum DC voltage 260 V	Rated input voltage 360 V	Maximum DC voltage 500 V
5%	87.9%	89.2%	85.7%
10%	92.3%	93.6%	91.5%
20%	94.8%	95.8%	94.6%
25%	95.3%	96.2%	95.2%
30%	95.5%	96.5%	95.6%
50%	95.9%	96.7%	96.2%


Standardized output power	Efficiency		
	Minimum DC voltage 260 V	Rated input voltage 360 V	Maximum DC voltage 500 V
75%	95.8%	96.5%	96.3%
100%	95.4%	96.2%	96.2%

4.1.2 Derating Behavior

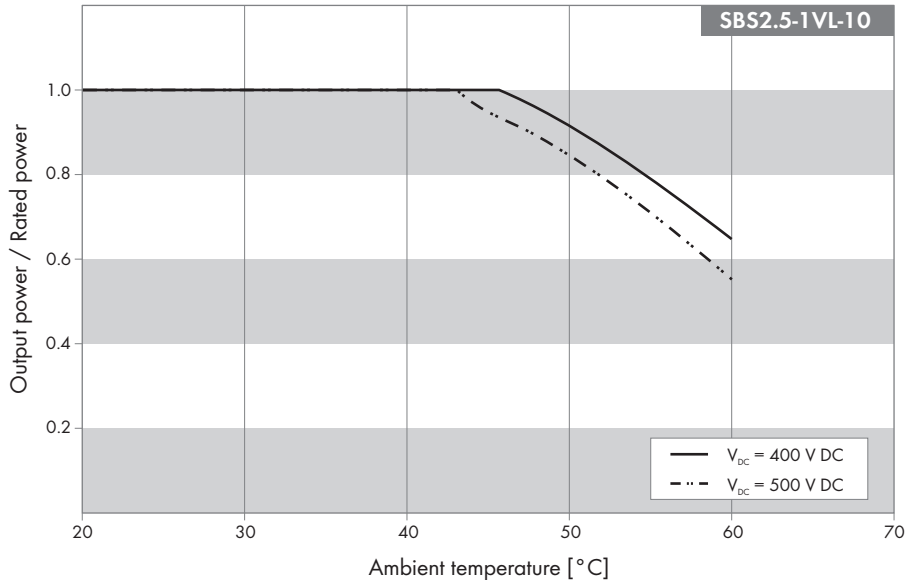

4.2 SBS3.7-10

4.2.1 DC Efficiency

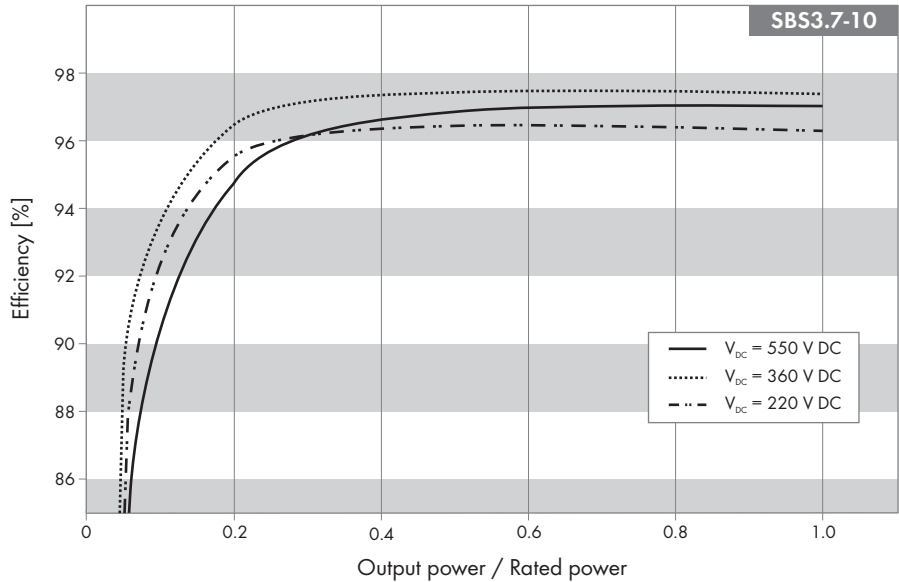


Maximum efficiency 97.5 %

Efficiency Profile


Standardized output power	Efficiency		
	Minimum DC voltage 220 V	Rated input voltage 360 V	Maximum DC voltage 550 V
10 %	92.7 %	93.6 %	88.6 %
20 %	95.5 %	96.5 %	94.7 %
30 %	96.1 %	97.1 %	96.1 %
50 %	96.4 %	97.4 %	96.8 %
75 %	96.4 %	97.5 %	97.0 %
100 %	96.3 %	97.4 %	97.0 %

4.2.2 Derating Behavior

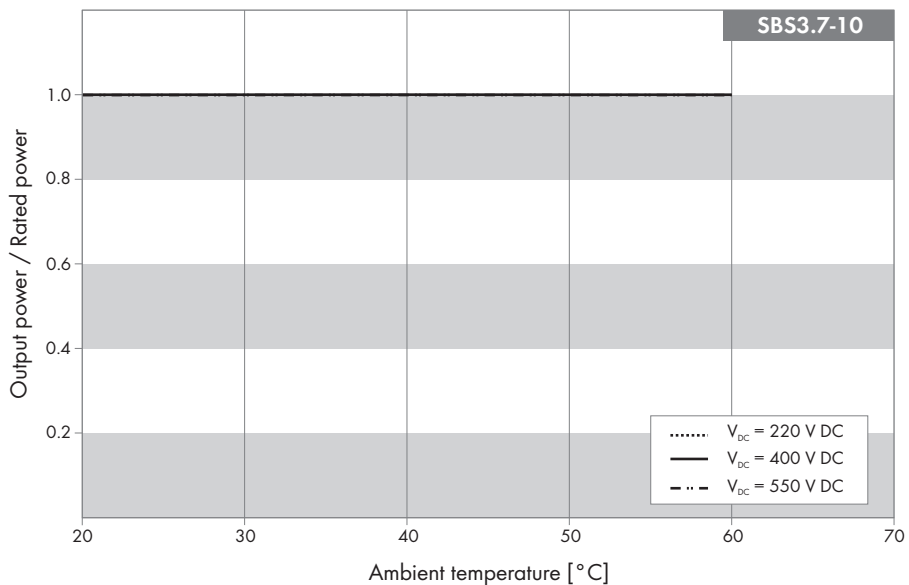

4.3 SBS5.0-10

4.3.1 DC Efficiency

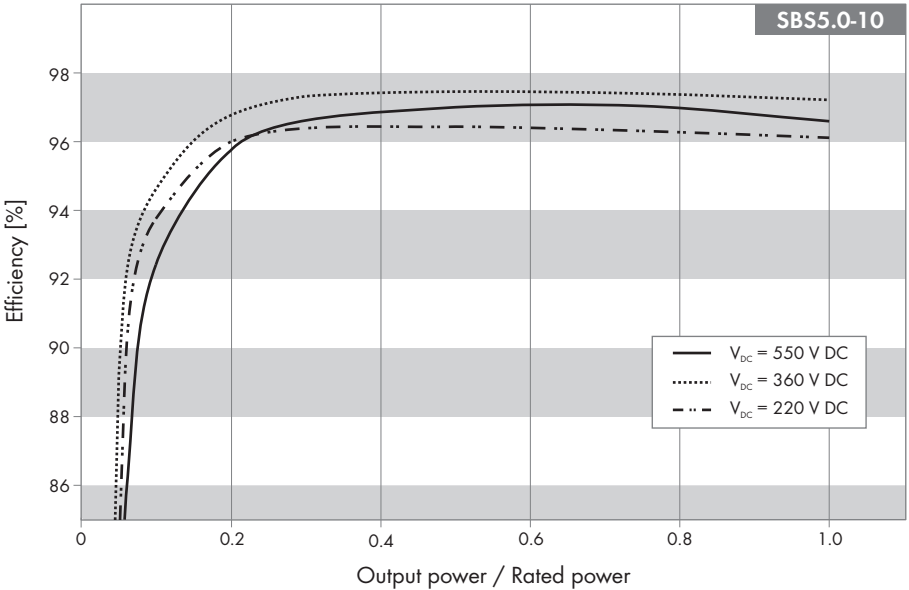


Maximum efficiency 97.5 %

Efficiency Profile


Standardized output power	Efficiency		
	Minimum DC voltage 220 V	Rated input voltage 360 V	Maximum DC voltage 550 V
10 %	93.8 %	94.6 %	92.4 %
20 %	96.0 %	96.9 %	92.4 %
30 %	96.4 %	97.3 %	96.5 %
50 %	96.4 %	97.5 %	97.0 %
75 %	96.3 %	97.4 %	97.0 %
100 %	96.1 %	97.2 %	96.6 %

4.3.2 Derating Behavior

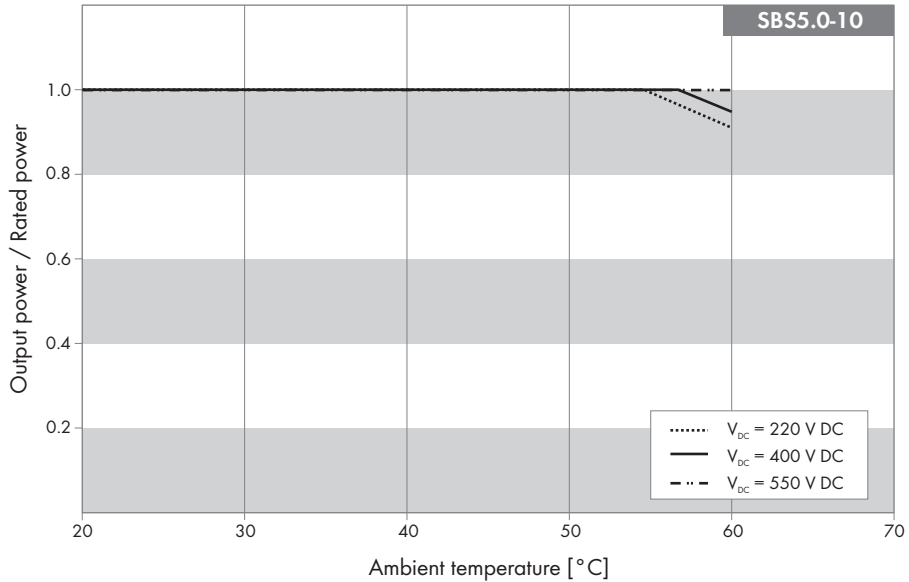

4.4 SBS6.0-10

4.4.1 DC Efficiency

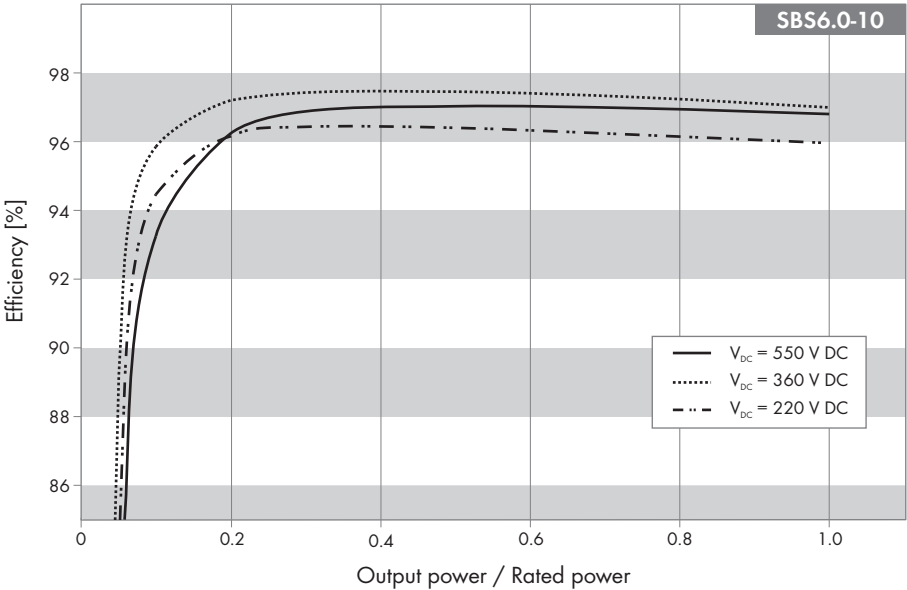


Maximum efficiency 97.5 %

Efficiency Profile

Standardized output power	Efficiency		
	Minimum DC voltage 220 V	Rated input voltage 360 V	Maximum DC voltage 550 V
10 %	94.5 %	95.8 %	93.3 %
20 %	96.2 %	97.2 %	96.2 %
30 %	96.4 %	97.4 %	96.8 %
50 %	96.4 %	97.5 %	97.0 %
75 %	96.2 %	97.3 %	97.0 %
100 %	96.0 %	97.0 %	96.8 %


4.4.2 Derating Behavior

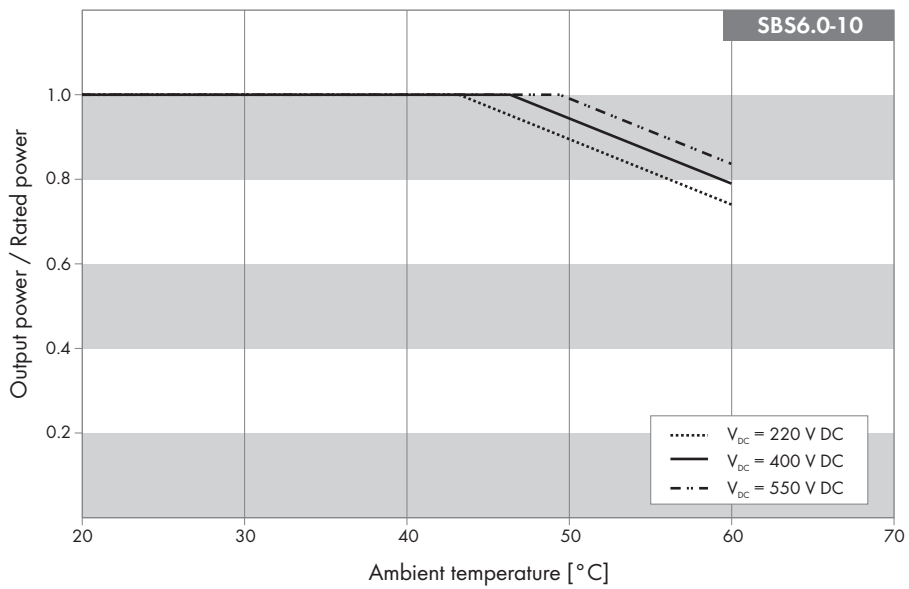

5 Sunny Tripower

5.1 STP 50-40

5.1.1 Efficiency

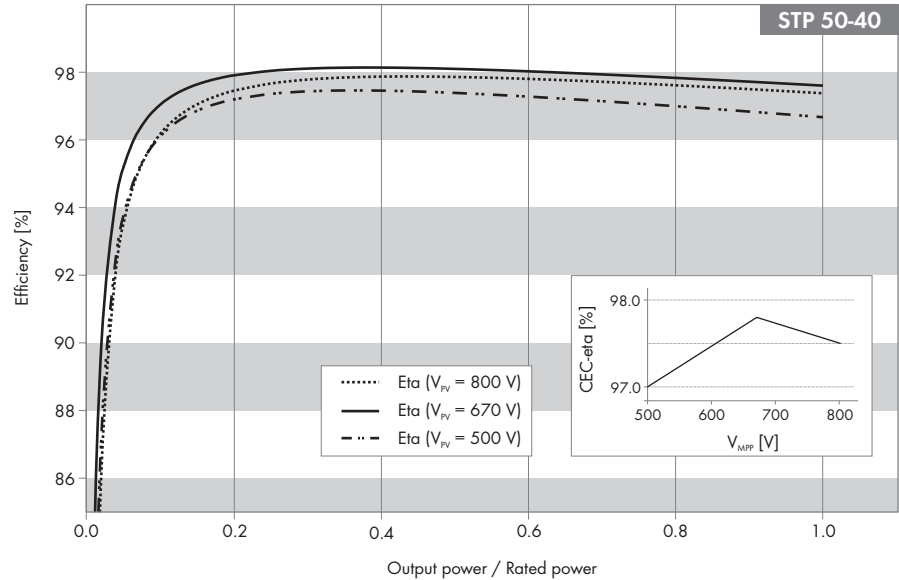

Maximum efficiency, $\eta_{\max}$ 98.1%


European weighted efficiency, η_{EU} 97.8%

Efficiency Profile

Standardized output power	Efficiency		
	Minimum MPP voltage 500 V	Rated input voltage 670 V	Maximum MPP voltage 800 V
5%	93.7%	95.2%	93.5%
10%	96.1%	97.0%	96.2%
20%	97.2%	97.9%	97.4%
25%	97.3%	98.0%	97.6%
30%	97.4%	98.1%	97.8%
50%	97.4%	98.1%	97.8%


Standardized output power	Efficiency		
	Minimum MPP voltage 500 V	Rated input voltage 670 V	Maximum MPP voltage 800 V
75%	97.1%	97.9%	97.6%
100%	96.7%	97.6%	97.4%

5.1.2 Derating Behavior

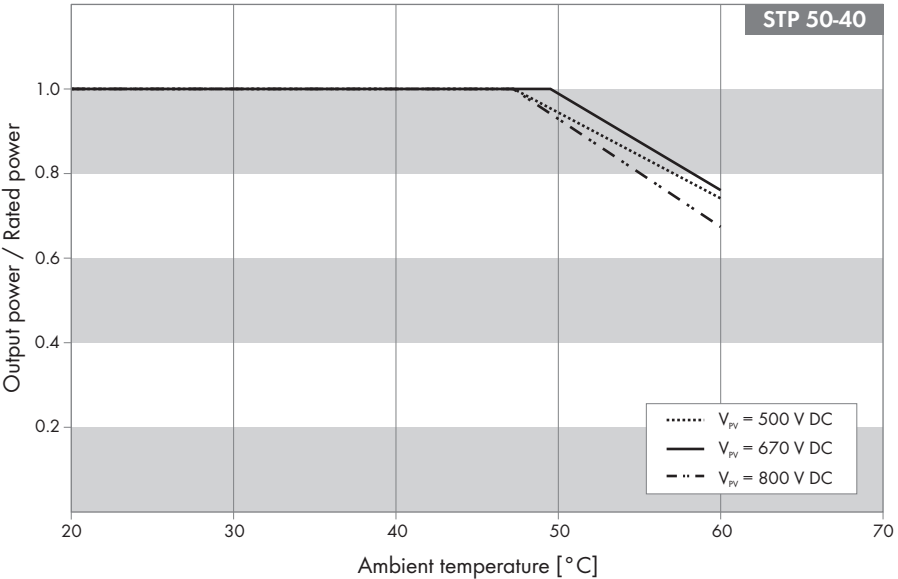

5.2 STP 50-JP-40

5.2.1 Efficiency

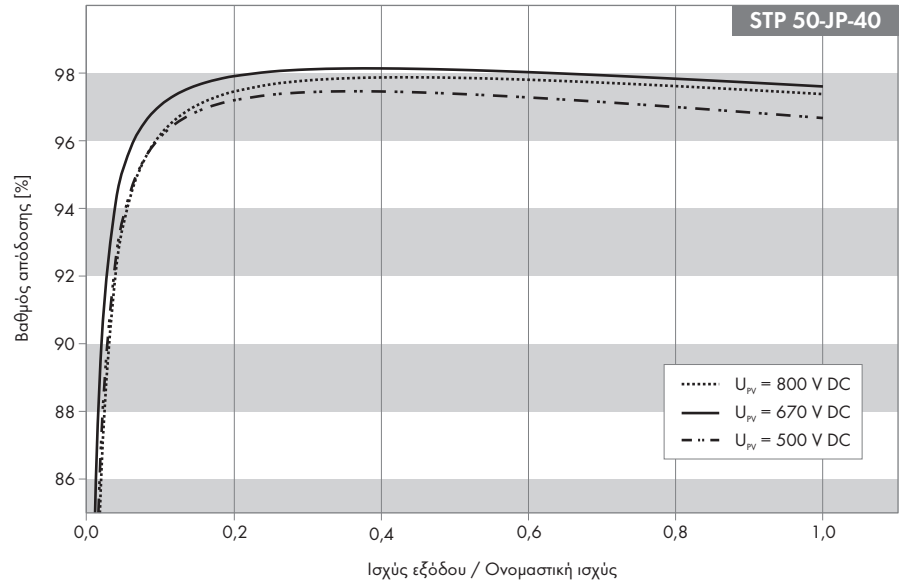


Maximum efficiency, $\eta_{\max}$ 98.1 %

European weighted efficiency, η_{EU} 97.8 %

Efficiency Profile


Standardized output power	Efficiency		
	Minimum MPP voltage 500 V	Rated input voltage 670 V	Maximum MPP voltage 800 V
5 %	93.7 %	95.2 %	93.5 %
10 %	96.1 %	97.0 %	96.2 %
20 %	97.2 %	97.9 %	97.4 %
25 %	97.3 %	98.0 %	97.6 %
30 %	97.4 %	98.1 %	97.8 %
50 %	97.4 %	98.1 %	97.8 %
75 %	97.1 %	97.9 %	97.6 %
100 %	96.7 %	97.6 %	97.4 %

5.2.2 Derating Behavior

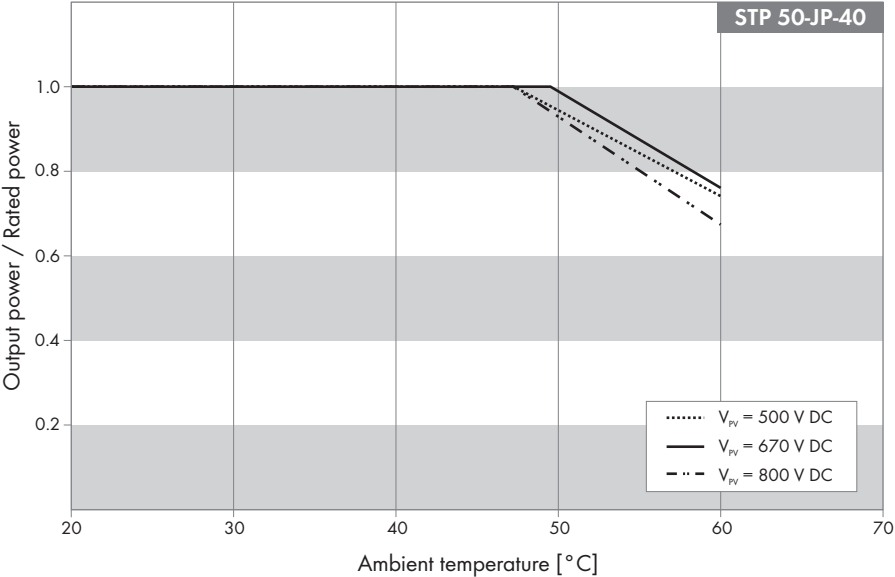

5.3 STP 60-10

5.3.1 Efficiency

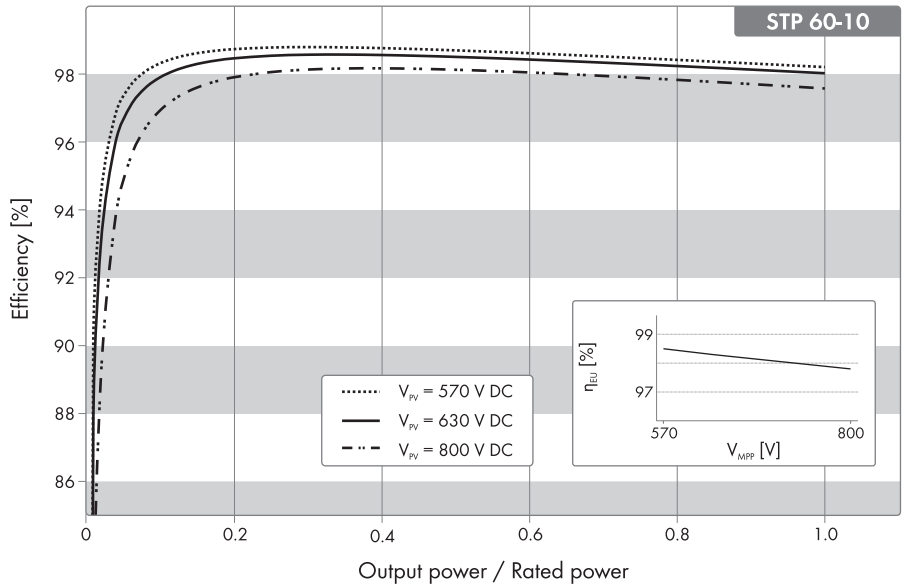


Maximum efficiency, η_{max}	98.8 %
European weighted efficiency, η_{EU}	98.3 %

Efficiency Profile


Standardized output power	Efficiency		
	Minimum MPP voltage 570 V	Rated input voltage 630 V	Maximum MPP voltage 800 V
5 %	97.3 %	96.5 %	94.6 %
10 %	98.2 %	97.8 %	96.9 %
20 %	98.7 %	98.4 %	97.9 %
25 %	98.8 %	98.5 %	98.0 %
30 %	98.8 %	98.5 %	98.1 %
50 %	98.6 %	98.5 %	98.0 %
75 %	98.4 %	98.2 %	97.8 %
100 %	98.2 %	98.0 %	97.6 %

5.3.2 Derating Behavior

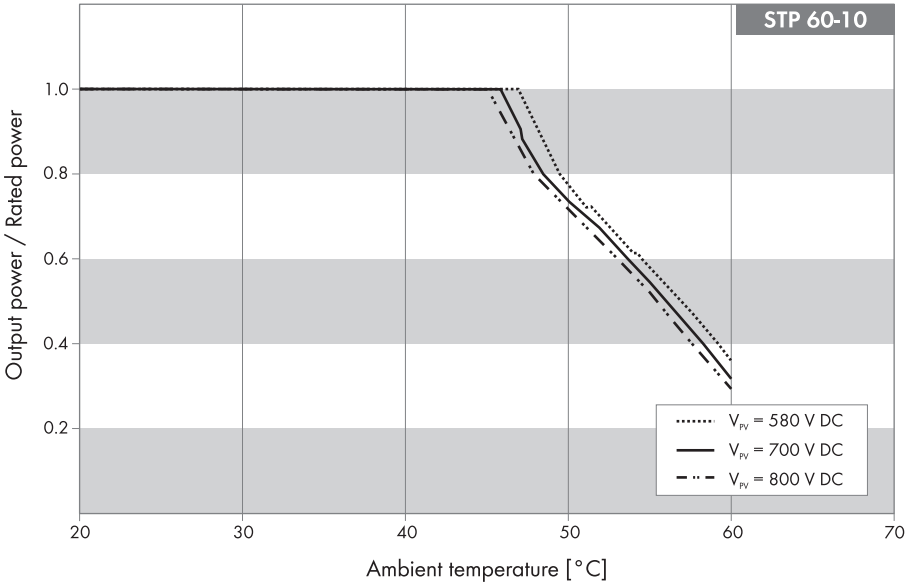

5.4 STP 60-JP-10

5.4.1 Efficiency

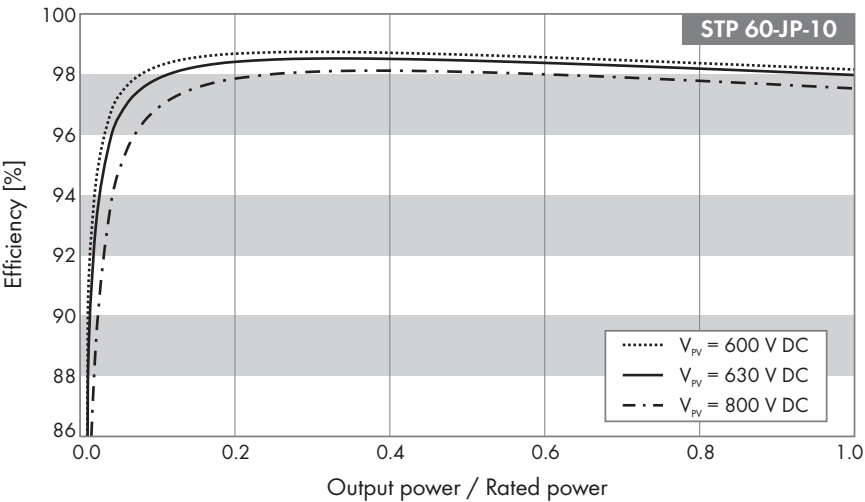


Maximum efficiency, $\eta_{\max}$	98.8%
European weighted efficiency, η_{EU}	98.3%

Efficiency Profile


Standardized output power	Efficiency		
	Minimum MPP voltage 600 V	Rated input voltage 630 V	Maximum MPP voltage 800 V
5%	96.6%	96.5%	94.6%
10%	98.0%	97.8%	96.9%
20%	98.6%	98.4%	97.9%
25%	98.7%	98.5%	98.0%
30%	98.7%	98.5%	98.1%
50%	98.6%	98.5%	98.0%
75%	98.3%	98.2%	97.8%
100%	98.1%	98.0%	97.6%

5.4.2 Derating Behavior

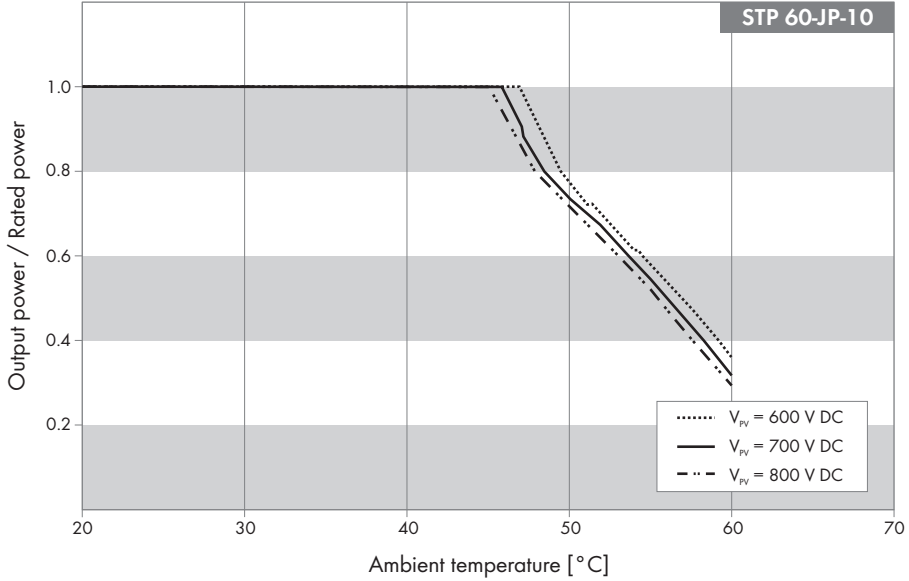

5.5 STP3.0-3AV-40

5.5.1 Efficiency

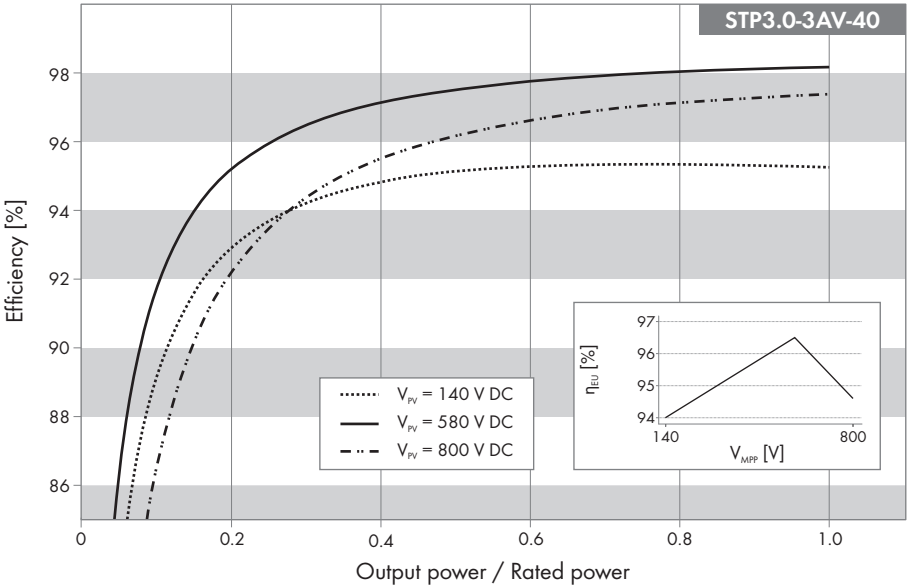


Maximum efficiency, η_{max} 96.5%

European weighted efficiency, η_{EU} 98.2%

Efficiency Profile


Standardized output power	Efficiency		
	Minimum MPP voltage 140 V	Rated input voltage 580 V	Maximum MPP voltage 800 V
5%	82.8%	86.0%	77.6%
10%	89.1%	91.6%	86.4%
20%	92.9%	95.2%	92.2%
25%	93.7%	96.0%	93.5%
30%	94.2%	96.5%	94.4%
50%	95.1%	97.5%	96.2%
75%	95.3%	98.0%	97.0%
100%	95.2%	98.2%	97.4%

5.5.2 Derating Behavior

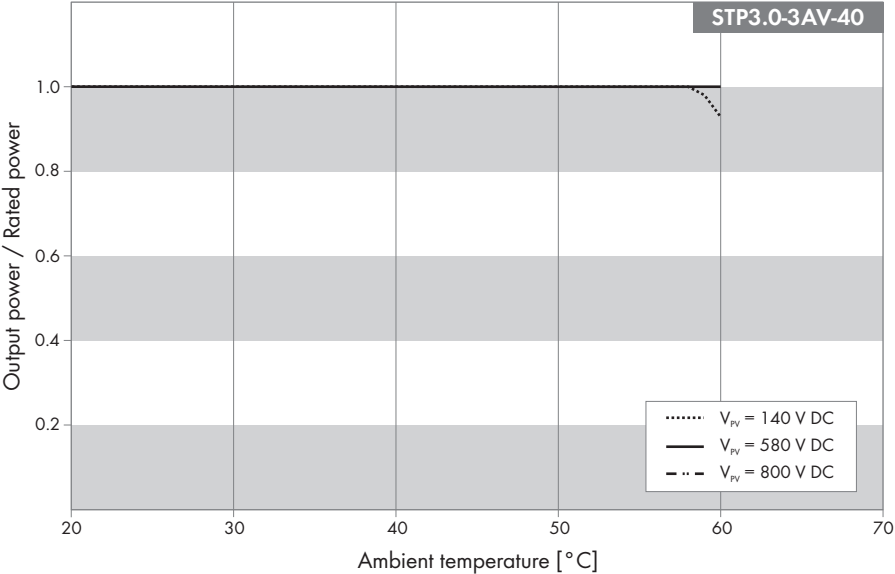

5.6 STP4.0-3AV-40

5.6.1 Efficiency

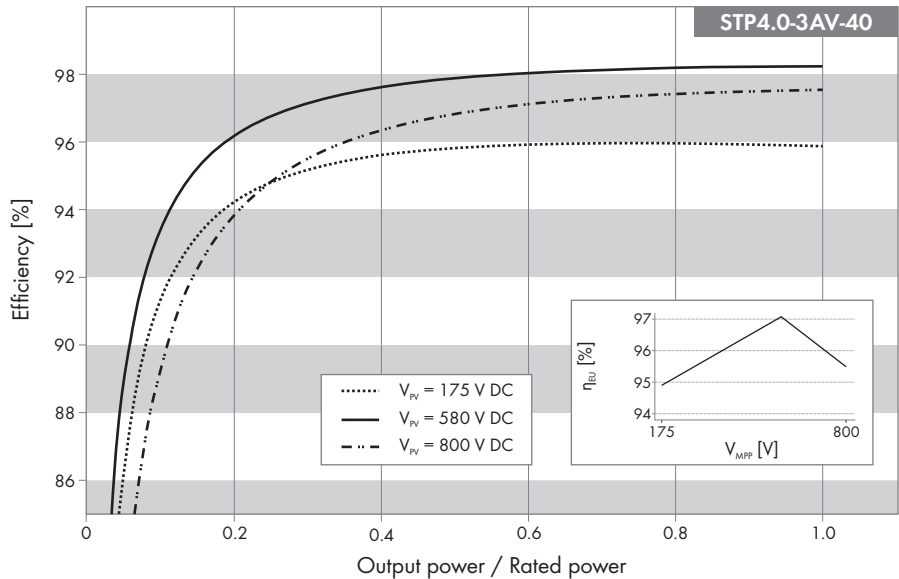


Maximum efficiency, $\eta_{\max}$	98.2%
European weighted efficiency, η_{EU}	97.1%

Efficiency Profile


Standardized output power	Efficiency		
	Minimum MPP voltage 175 V	Rated input voltage 580 V	Maximum MPP voltage 800 V
5%	85.9%	88.6%	81.6%
10%	91.2%	93.3%	98.1%
20%	94.2%	96.1%	93.8%
25%	94.8%	96.7%	94.8%
30%	95.2%	97.1%	95.5%
50%	95.8%	97.9%	96.8%
75%	96.0%	98.2%	97.4%
100%	95.9%	98.2%	97.6%

5.6.2 Derating Behavior

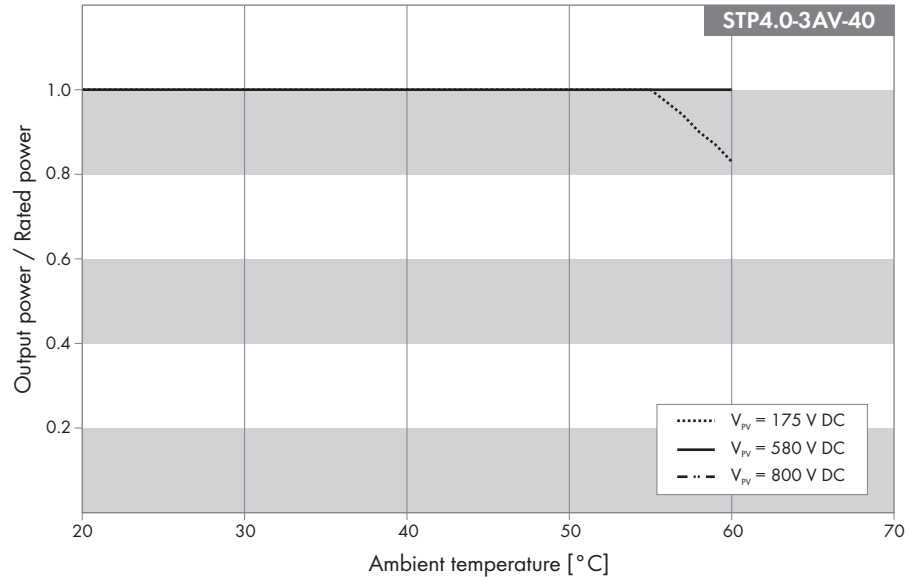

5.7 STP5.0-3AV-40

5.7.1 Efficiency

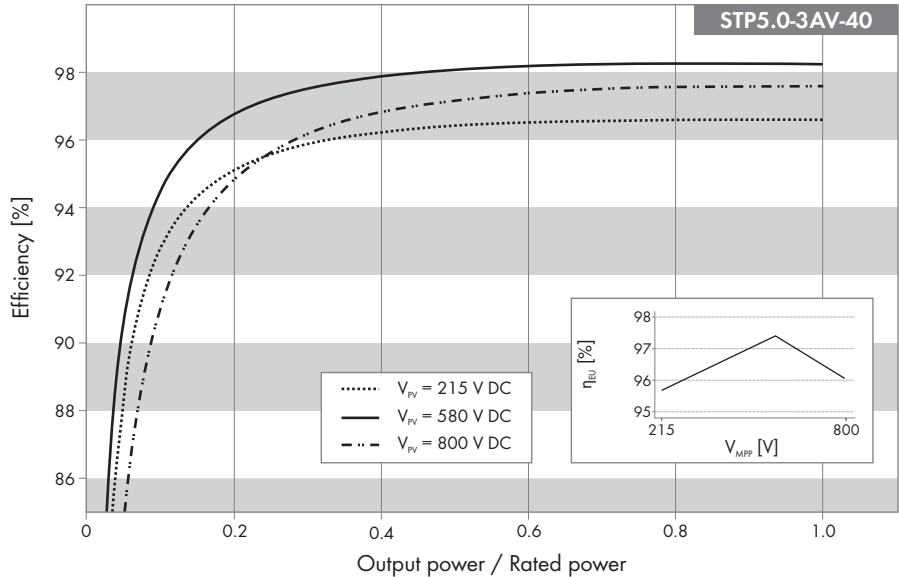


Maximum efficiency, $\eta_{\max}$	98.2%
European weighted efficiency, η_{EU}	97.4%

Efficiency Profile


Standardized output power	Efficiency		
	Minimum MPP voltage 215 V	Rated input voltage 580 V	Maximum MPP voltage 800 V
5%	88.2%	90.4%	84.4%
10%	92.7%	94.4%	90.9%
20%	95.1%	96.7%	94.8%
25%	95.6%	97.2%	95.6%
30%	95.9%	97.5%	96.2%
50%	96.4%	98.1%	97.2%
75%	96.6%	98.2%	97.5%
100%	96.6%	98.2%	97.6%

5.7.2 Derating Behavior

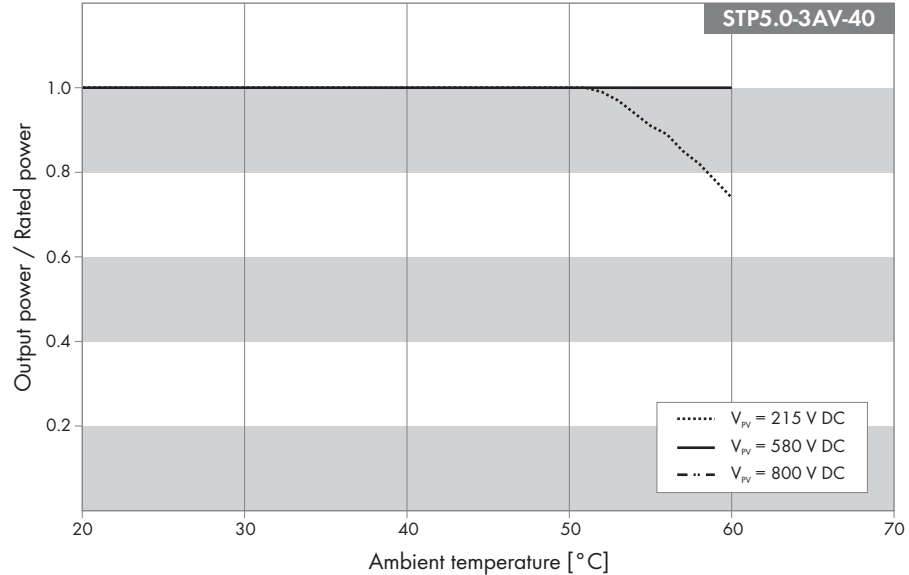

5.8 STP6.0-3AV-40

5.8.1 Efficiency

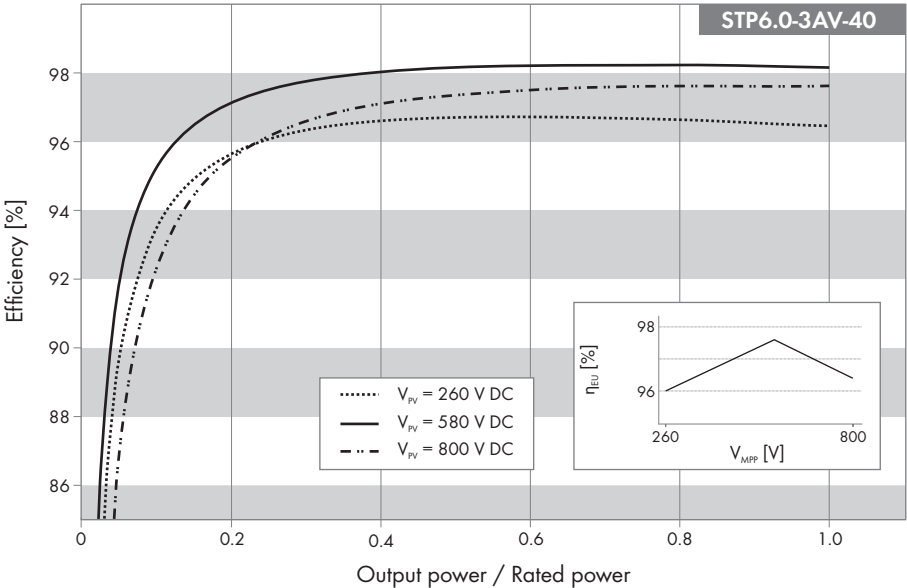


Maximum efficiency, η_{max} 98.2%

European weighted efficiency, η_{EU} 97.6%

Efficiency Profile


Standardized output power	Efficiency		
	Minimum MPP voltage 260 V	Rated input voltage 580 V	Maximum MPP voltage 800 V
5%	89.3%	91.6%	86.4%
10%	93.4%	95.2%	92.2%
20%	95.6%	97.1%	95.5%
25%	96.1%	97.5%	96.1%
30%	96.3%	97.8%	96.6%
50%	96.7%	98.2%	97.4%
75%	96.7%	98.2%	97.6%
100%	96.5%	98.2%	97.6%

5.8.2 Derating Behavior

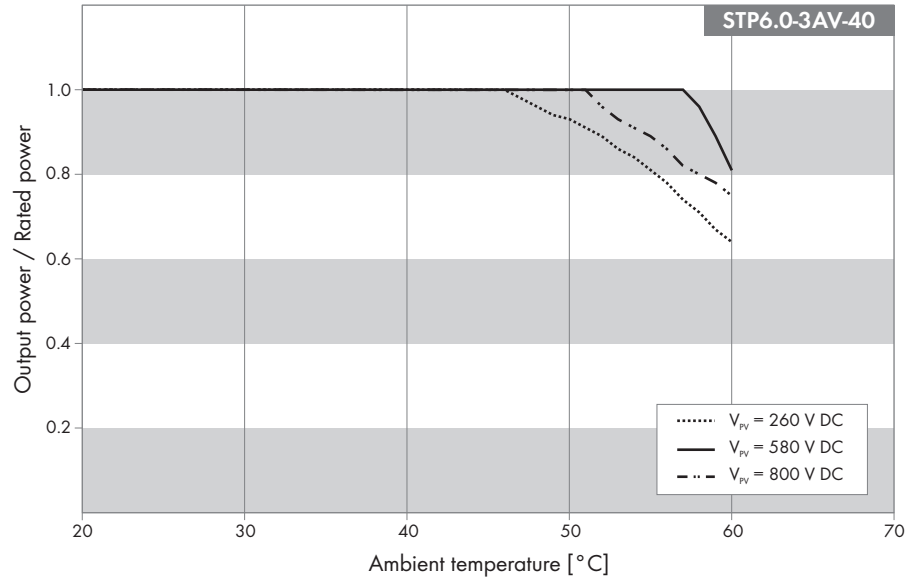

5.9 STP8.0-3AV-40

5.9.1 Efficiency

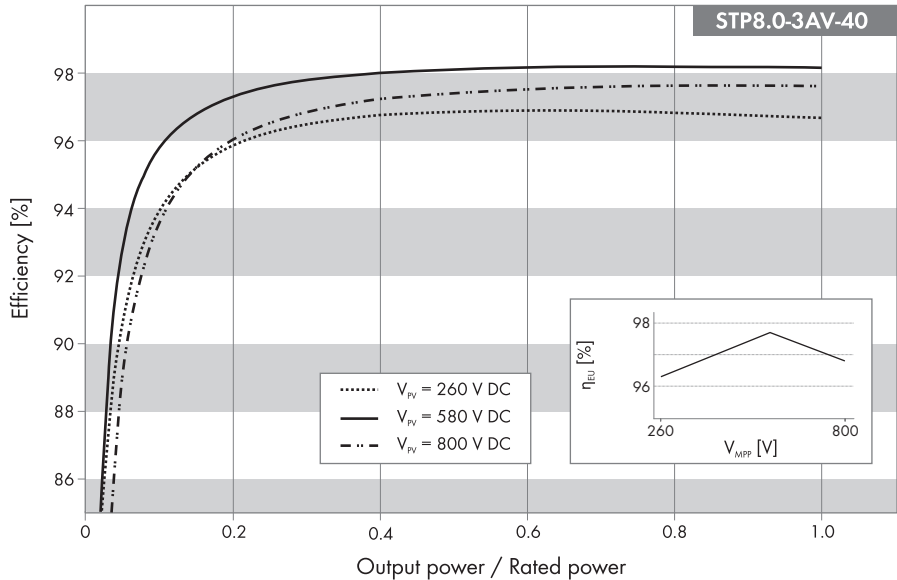


Maximum efficiency, η_{max}	98.3%
European weighted efficiency, η_{EU}	97.7%

Efficiency Profile


Standardized output power	Efficiency		
	Minimum MPP voltage 260 V	Rated input voltage 580 V	Maximum MPP voltage 800 V
5%	90.6%	92.7%	88.8%
10%	93.9%	95.8%	93.6%
20%	95.9%	97.4%	96.1%
25%	96.3%	97.7%	96.6%
30%	96.6%	97.9%	96.9%
50%	96.9%	98.2%	97.5%
75%	96.9%	98.3%	97.7%
100%	96.7%	98.2%	97.7%

5.9.2 Derating Behavior

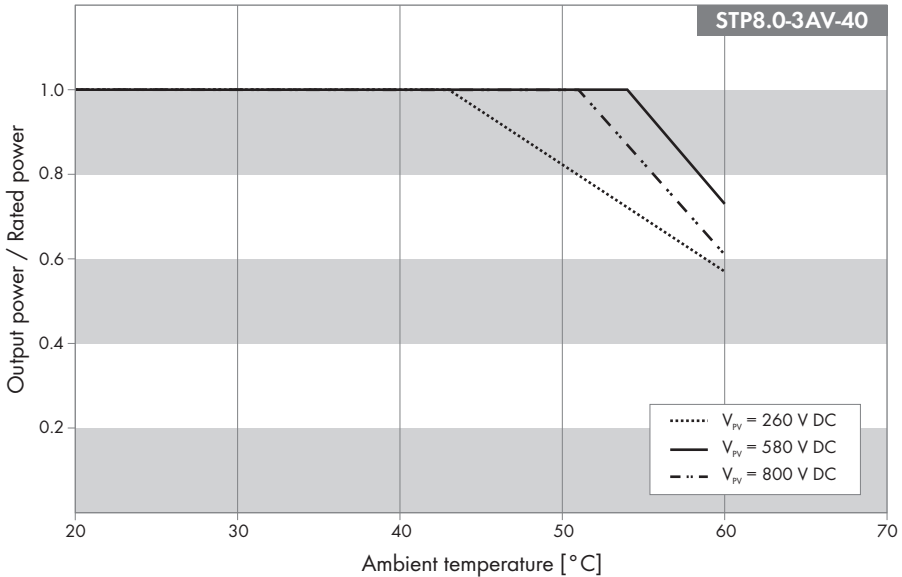

5.10 STP10.0-3AV-40

5.10.1 Efficiency

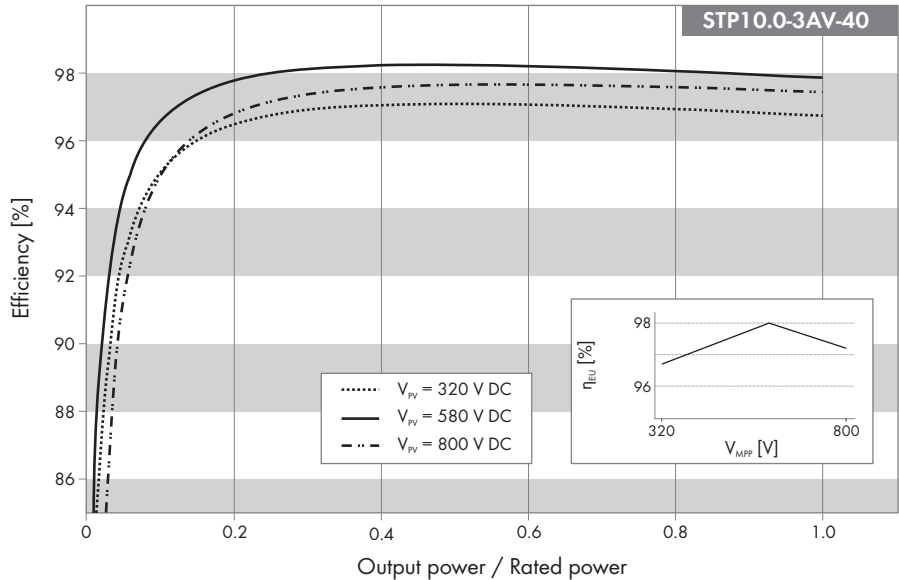


Maximum efficiency, $\eta_{\max}$ 98.3%

European weighted efficiency, η_{EU} 98.0%

Efficiency Profile


Standardized output power	Efficiency		
	Minimum MPP voltage 320 V	Rated input voltage 580 V	Maximum MPP voltage 800 V
5%	92.5%	94.4%	91.3%
10%	95.1%	96.6%	95.0%
20%	96.5%	97.8%	96.9%
25%	96.8%	98.1%	97.2%
30%	97.0%	98.2%	97.4%
50%	97.2%	98.3%	97.7%
75%	97.0%	98.2%	97.7%
100%	96.8%	97.9%	97.5%

5.10.2 Derating Behavior

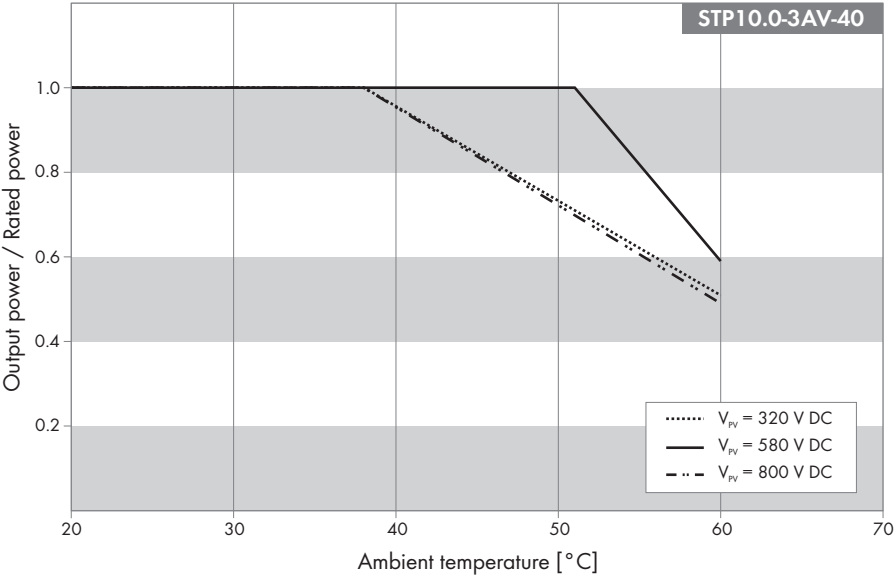

5.11 STP 5000TL-20

5.11.1 Efficiency

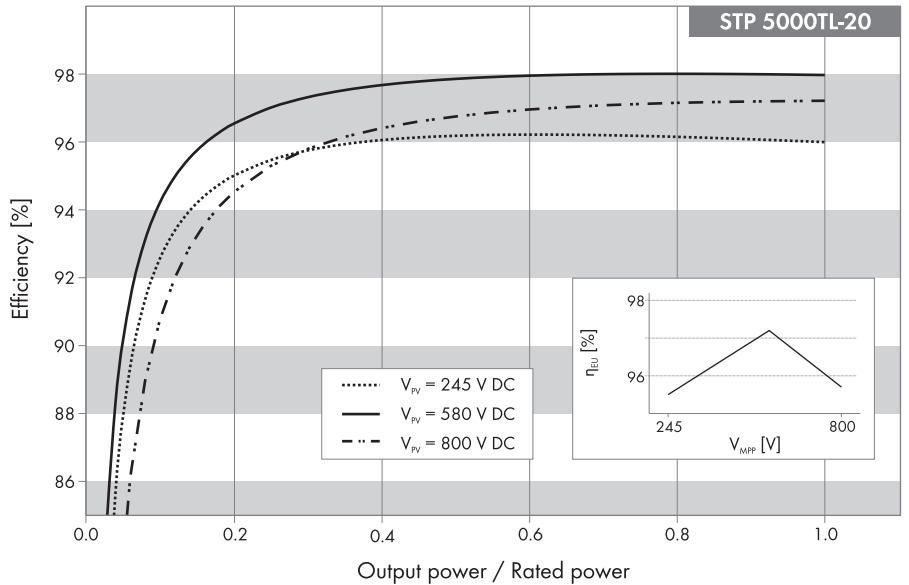


Maximum efficiency, η_{max}	98.0%
European efficiency, η_{EU}	97.2%

Efficiency Profile


Standardized output power	Efficiency		
	Minimum MPP voltage 245 V	Rated input voltage 580 V	Maximum MPP voltage 800 V
5%	87.8%	90.1%	84.0%
10%	92.6%	94.2%	90.8%
20%	95.0%	96.5%	94.5%
25%	95.5%	97.0%	95.3%
30%	95.7%	97.3%	95.8%
50%	96.2%	97.9%	96.7%
75%	96.2%	98.0%	97.1%
100%	96.0%	98.0%	97.2%

5.11.2 Derating Behavior

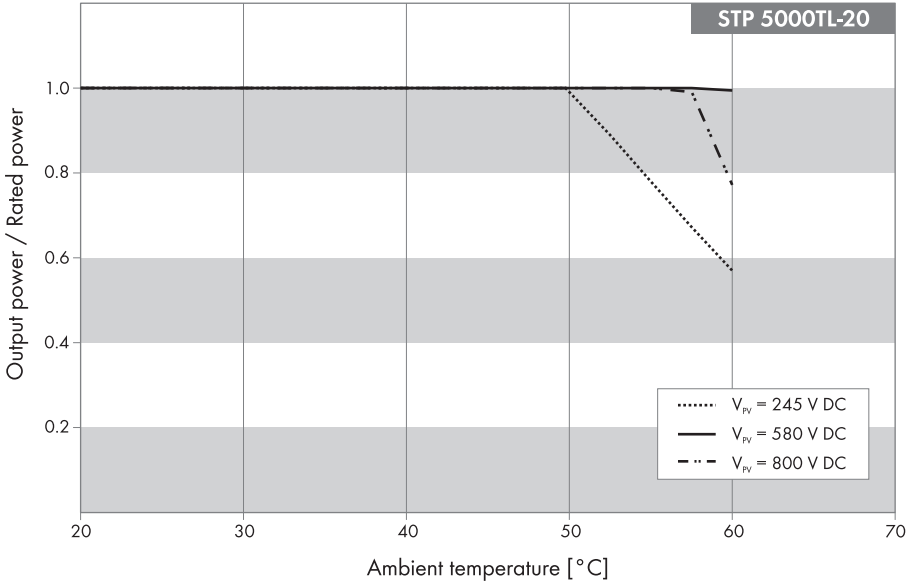

5.12 STP 6000TL-20

5.12.1 Efficiency

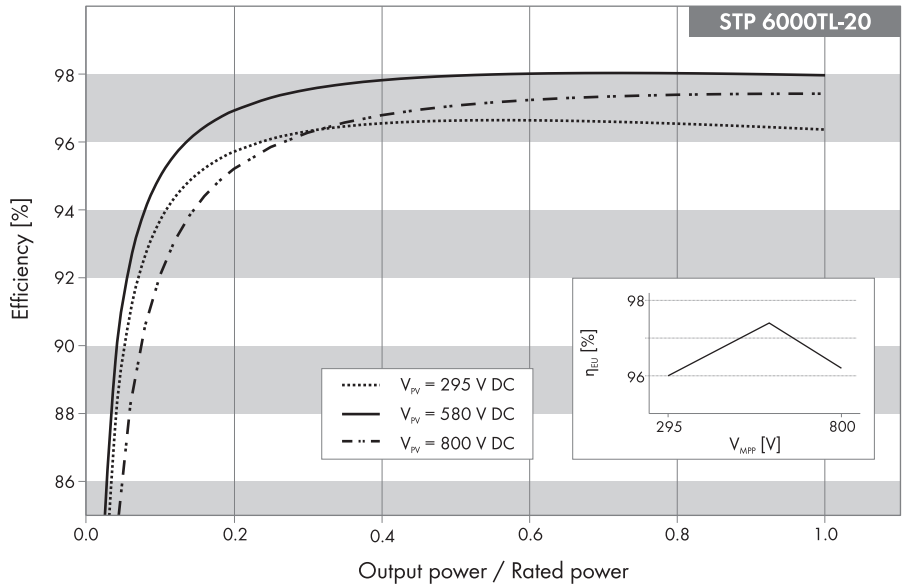


Maximum efficiency, $\eta_{\max}$	98.0%
European efficiency, η_{EU}	97.4%

Efficiency Profile


Standardized output power	Efficiency		
	Minimum MPP voltage 295 V	Rated input voltage 580 V	Maximum MPP voltage 800 V
5%	89.7%	91.3%	86.5%
10%	93.7%	95.0%	92.1%
20%	95.7%	96.9%	95.2%
25%	96.1%	97.3%	95.9%
30%	96.3%	97.5%	96.3%
50%	96.6%	98.0%	97.1%
75%	96.6%	98.0%	97.4%
100%	96.4%	98.0%	97.4%

5.12.2 Derating Behavior

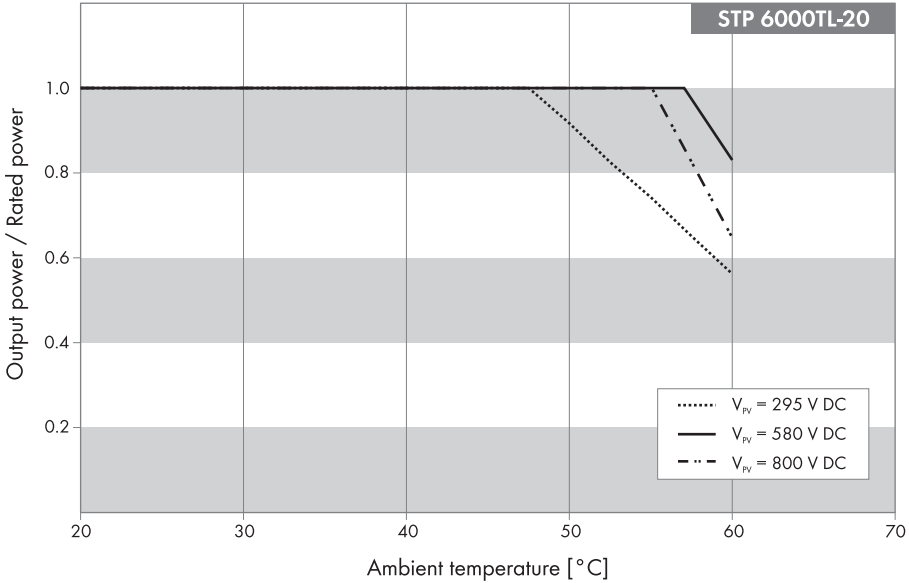

5.13 STP 7000TL-20

5.13.1 Efficiency

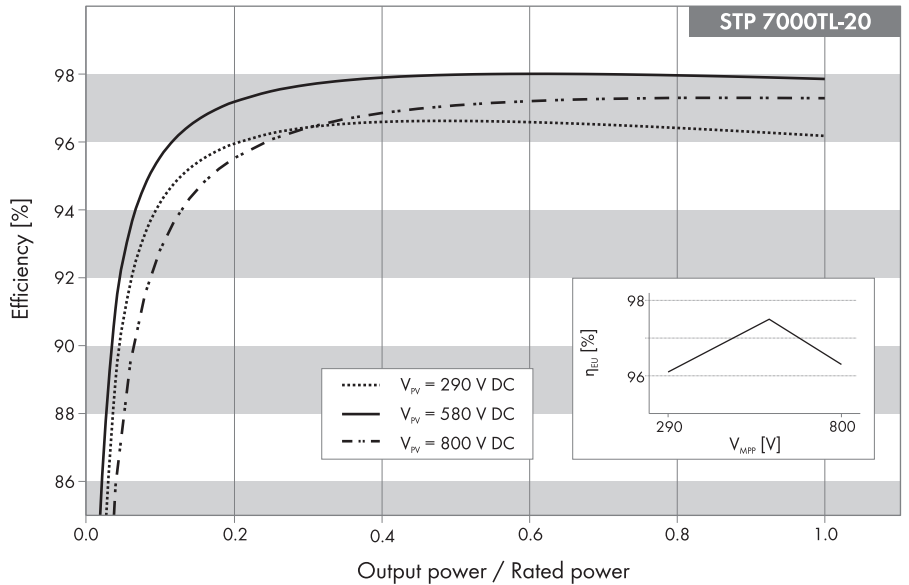


Maximum efficiency, η_{max}	98.0%
European efficiency, η_{EU}	97.5%

Efficiency Profile


Standardized output power	Efficiency		
	Minimum MPP voltage 290 V	Rated input voltage 580 V	Maximum MPP voltage 600 V
5%	90.7%	92.5%	88.0%
10%	94.2%	95.5%	92.8%
20%	95.9%	97.2%	95.5%
25%	96.3%	97.5%	96.1%
30%	96.4%	97.7%	96.4%
50%	96.6%	98.0%	97.1%
75%	96.5%	98.0%	97.3%
100%	96.2%	97.9%	97.3%

5.13.2 Derating Behavior

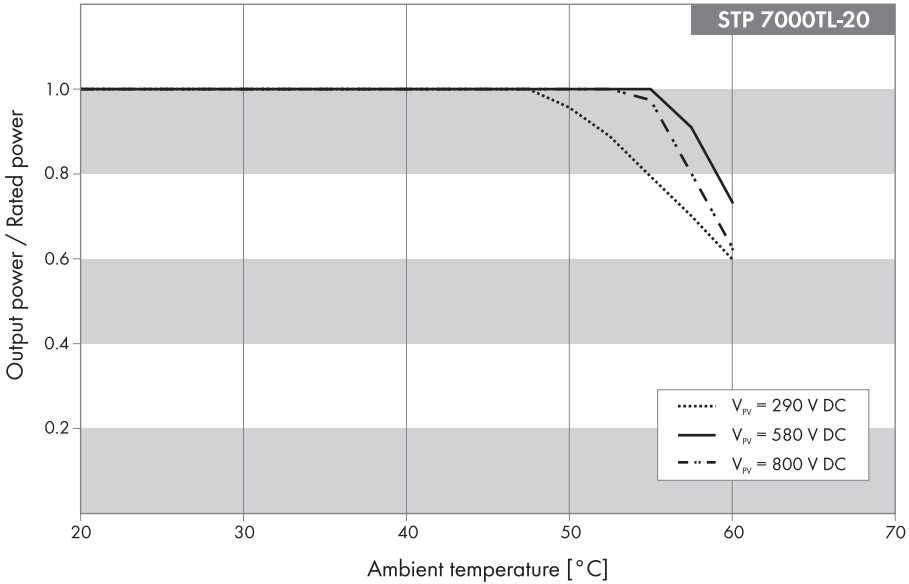

5.14 STP 8000TL-10

5.14.1 Efficiency

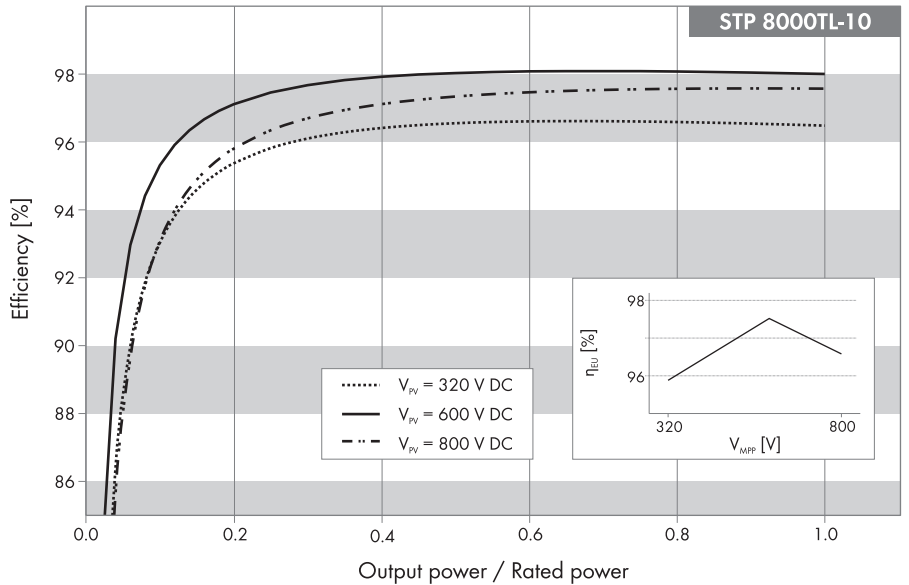


Maximum efficiency, $\eta_{\max}$	98.1%
European efficiency, η_{EU}	97.5%

Efficiency Profile


Standardized output power	Efficiency		
	Minimum MPP voltage 320 V	Rated input voltage 600 V	Maximum MPP voltage 800 V
5%	88.2%	91.6%	87.6%
10%	93.0%	95.3%	93.1%
20%	95.4%	97.1%	95.8%
25%	95.8%	97.5%	96.3%
30%	96.1%	97.7%	96.7%
50%	96.6%	98.0%	97.3%
75%	96.6%	98.1%	97.6%
100%	96.5%	98.0%	97.6%

5.14.2 Derating Behavior

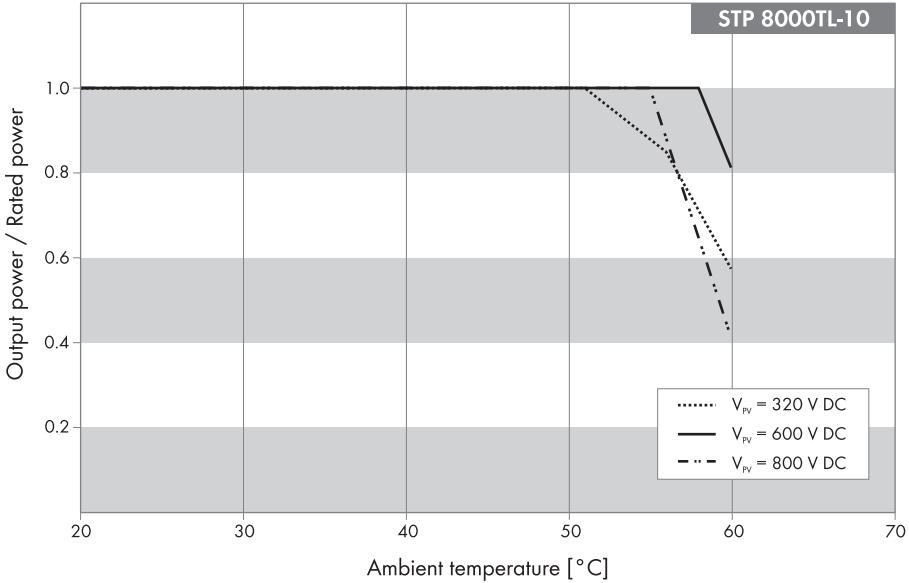

5.15 STP 8000TL-20

5.15.1 Efficiency

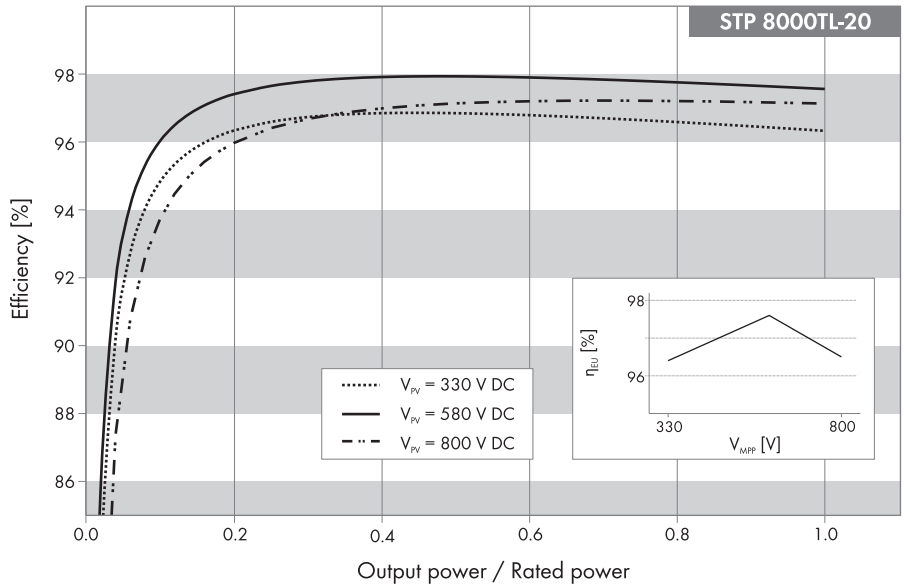


Maximum efficiency, η_{max} 98.0%

European efficiency, η_{EU} 97.6%

Efficiency Profile


Standardized output power	Efficiency		
	Minimum MPP voltage 330 V	Rated input voltage 580 V	Maximum MPP voltage 800 V
5%	91.7%	93.2%	89.4%
10%	94.8%	96.0%	93.7%
20%	96.3%	97.4%	96.0%
25%	96.6%	97.7%	96.4%
30%	96.7%	97.8%	96.7%
50%	96.9%	98.0%	97.1%
75%	96.7%	97.8%	97.2%
100%	96.3%	97.6%	97.1%

5.15.2 Derating Behavior

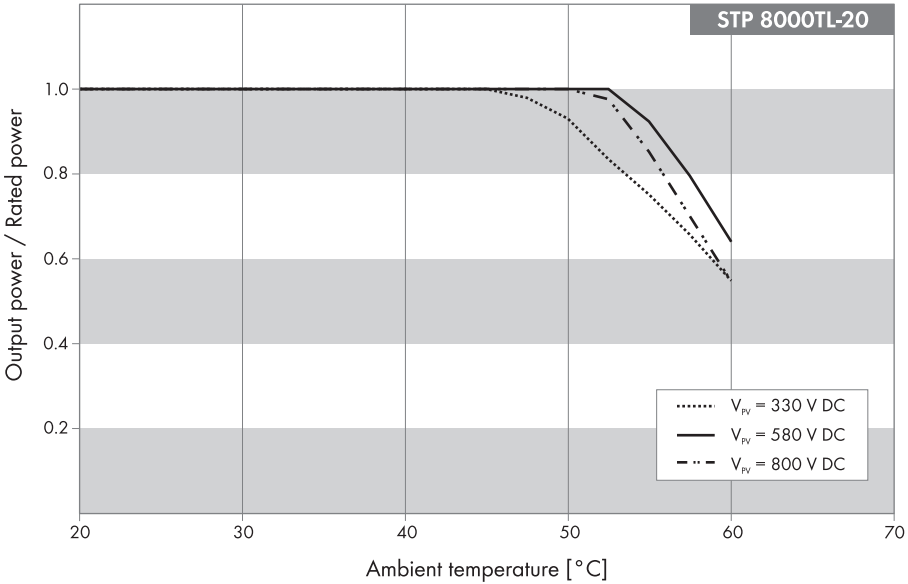

5.16 STP 9000TL-20

5.16.1 Efficiency

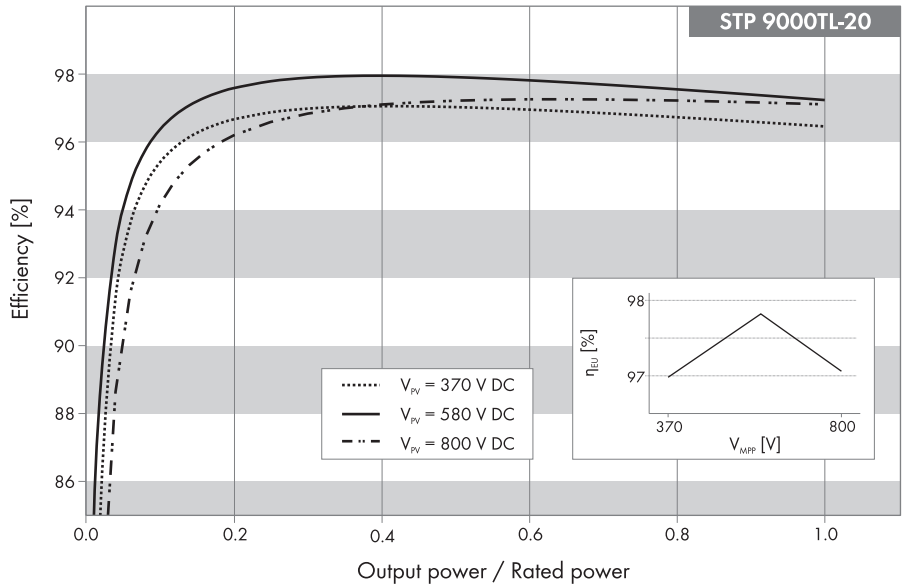


Maximum efficiency, η_{max}	98.0%
European efficiency, η_{EU}	97.6%

Efficiency Profile


Standardized output power	Efficiency		
	Minimum MPP voltage 370 V	Rated input voltage 580 V	Maximum MPP voltage 800 V
5%	92.7%	94.0%	90.4%
10%	95.4%	96.4%	94.2%
20%	96.7%	97.6%	96.2%
25%	96.9%	97.8%	96.6%
30%	97.0%	97.9%	96.8%
50%	97.0%	98.0%	97.2%
75%	96.8%	97.6%	97.2%
100%	96.5%	97.2%	97.1%

5.16.2 Derating Behavior

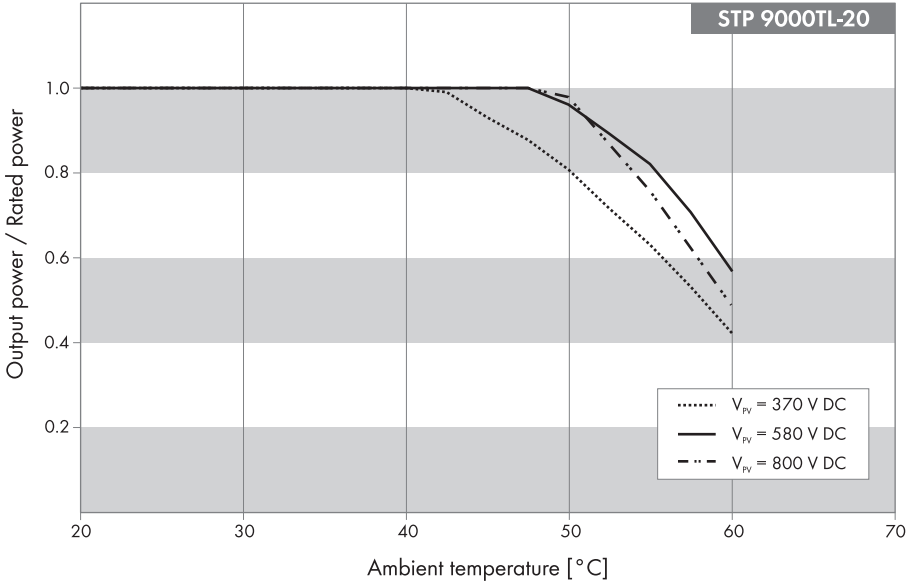

5.17 STP 10000TL-10

5.17.1 Efficiency

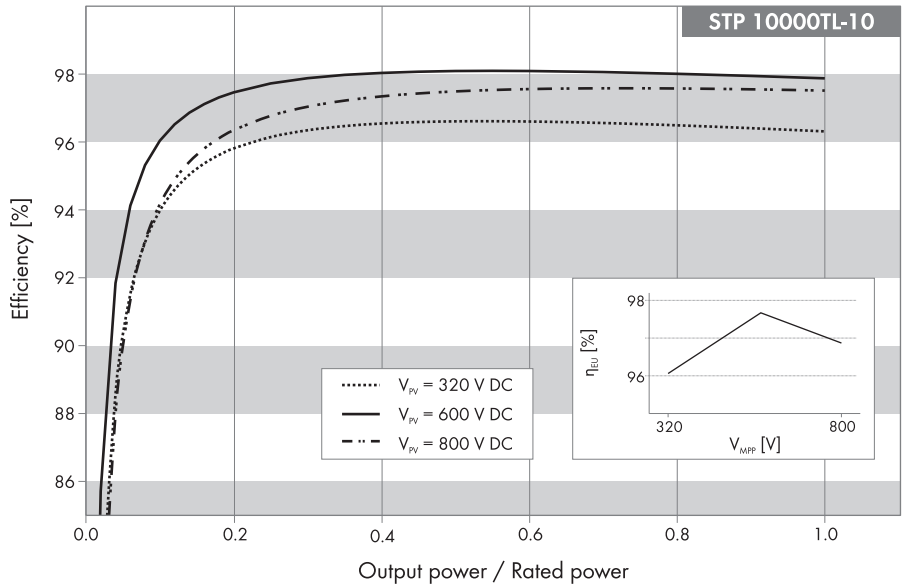


Maximum efficiency, $\eta_{\max}$	98.1%
European efficiency, η_{EU}	97.7%

Efficiency Profile


Standardized output power	Efficiency		
	Minimum MPP voltage 320 V	Rated input voltage 600 V	Maximum MPP voltage 800 V
5%	90.0%	93.0%	89.7%
10%	94.0%	96.0%	94.2%
20%	95.8%	97.5%	96.3%
25%	96.1%	97.7%	96.8%
30%	96.3%	97.9%	97.0%
50%	96.6%	98.1%	97.5%
75%	96.5%	98.0%	97.6%
100%	96.3%	97.9%	97.5%

5.17.2 Derating Behavior

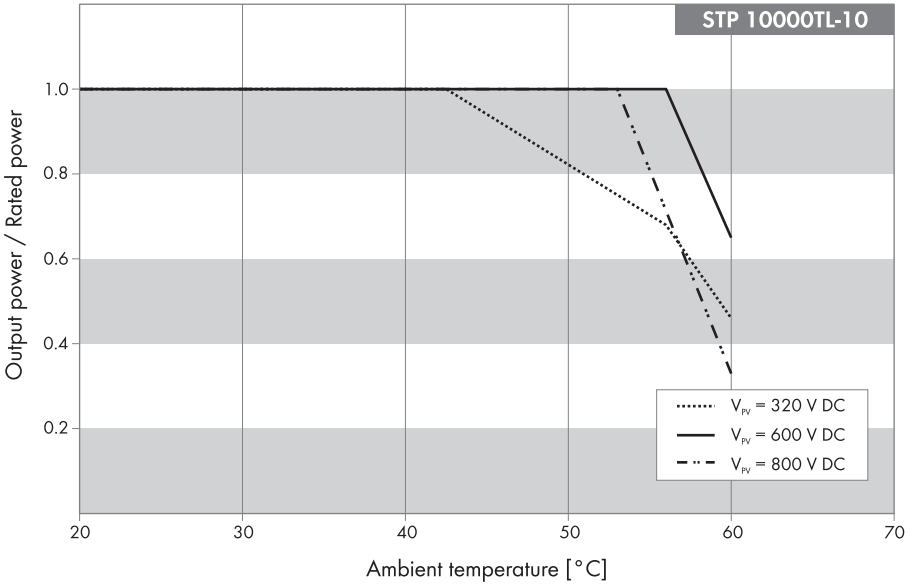

5.18 STP 10000TLEE-JP-10 / STP 10000TLEE-JP-11

5.18.1 Efficiency

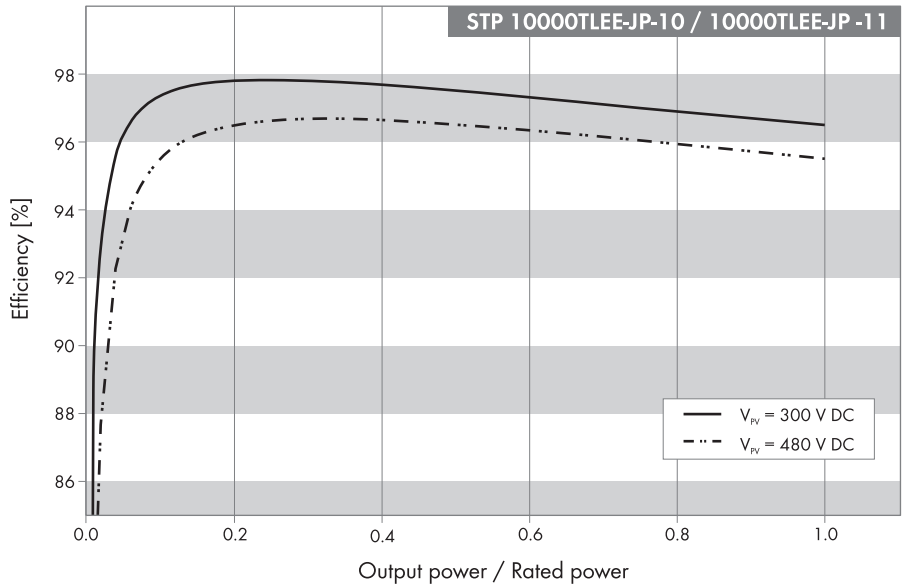


Maximum efficiency, $\eta_{\max}$ 97.8%

Efficiency Profile


Standardized output power	Efficiency	
	Minimum MPP voltage / rated input voltage 300 V	Maximum MPP voltage 480 V
5%	96.2%	93.3%
10%	97.4%	95.5%
20%	97.8%	96.5%
25%	97.8%	96.6%
30%	97.8%	96.7%
50%	97.5%	96.5%
75%	97.0%	96.0%
100%	96.4%	95.5%

5.18.2 Derating Behavior

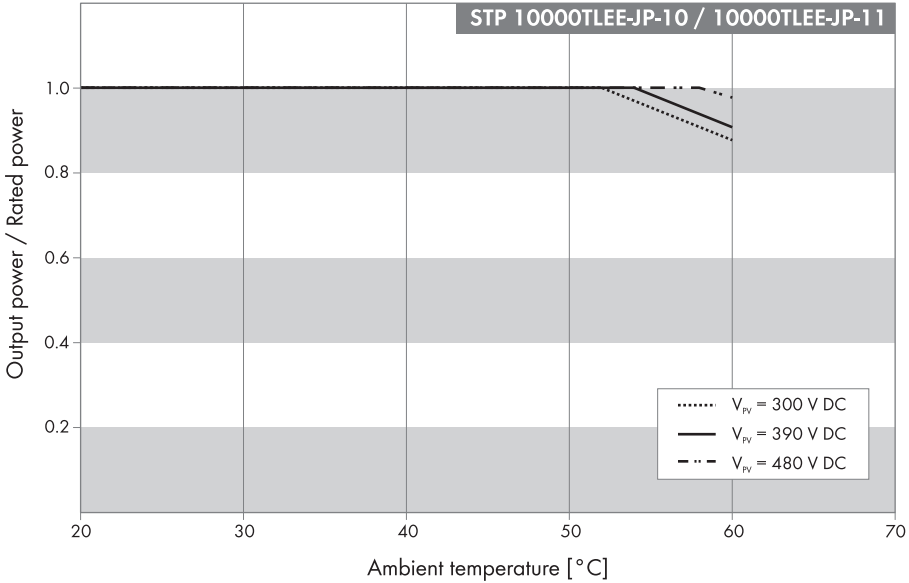

5.19 STP 10000TL-20

5.19.1 Efficiency

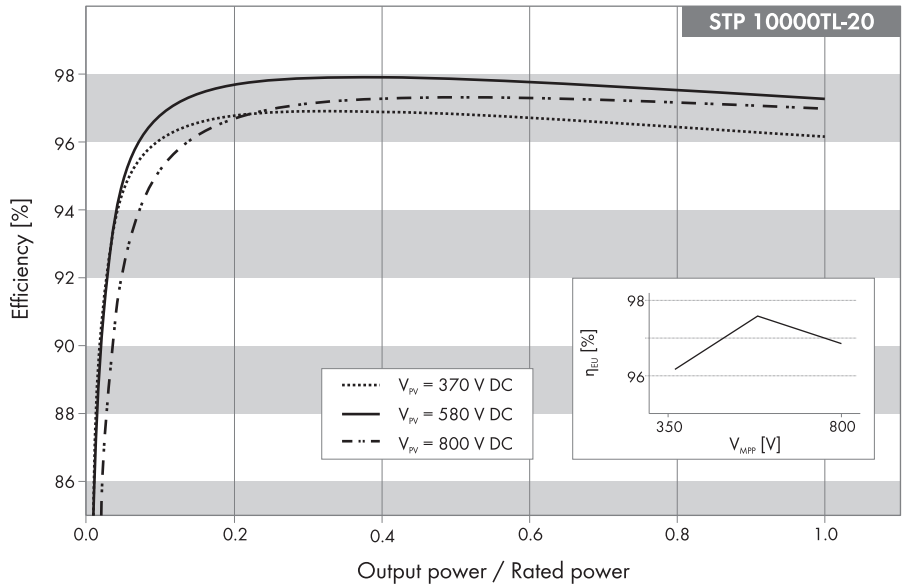


Maximum efficiency, η_{max}	98.0%
European weighted efficiency, η_{EU}	97.6%

Efficiency Profile


Standardized output power	Efficiency		
	Minimum MPP voltage 370 V	Rated input voltage 580 V	Maximum MPP voltage 800 V
5%	94.5%	94.9%	92.2%
10%	96.1%	96.8%	95.2%
20%	96.8%	97.7%	96.7%
25%	96.9%	97.8%	97.0%
30%	96.9%	97.9%	97.1%
50%	96.8%	97.9%	97.3%
75%	96.5%	97.6%	97.2%
100%	96.2%	97.3%	97.0%

5.19.2 Derating Behavior

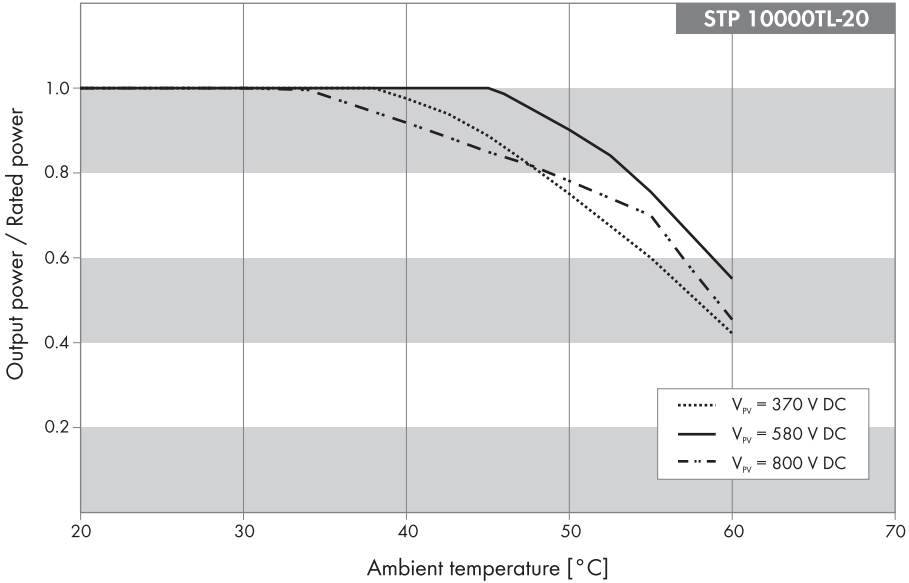

5.20 STP 12000TL-10

5.20.1 Efficiency

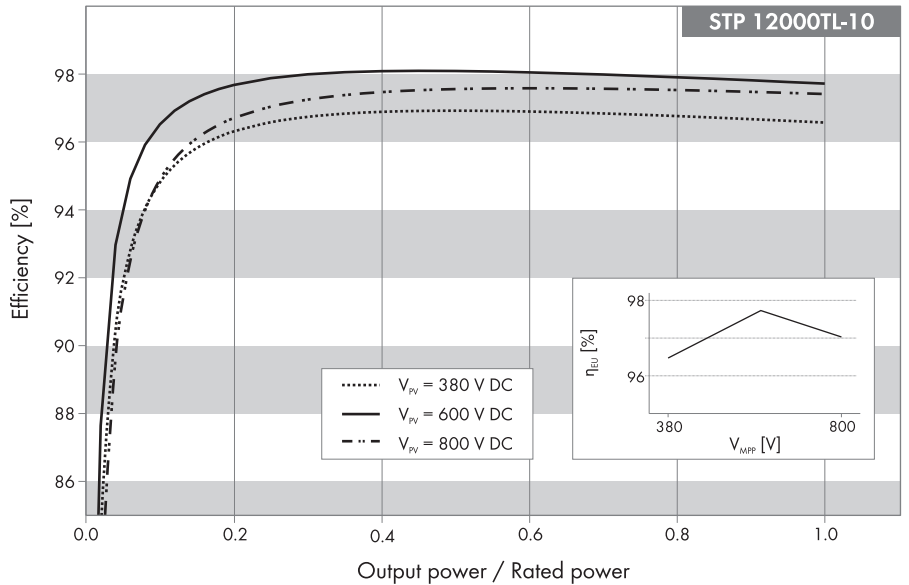


Maximum efficiency, η_{max}	98.1%
European efficiency, η_{EU}	97.7%

Efficiency Profile


Standardized output power	Efficiency		
	Minimum MPP voltage 380 V	Rated input voltage 600 V	Maximum MPP voltage 800 V
5%	91.6%	93.9%	91.1%
10%	94.8%	96.5%	94.9%
20%	96.3%	97.7%	96.7%
25%	96.6%	97.9%	97.0%
30%	96.7%	98.0%	97.2%
50%	96.9%	98.1%	97.6%
75%	96.8%	97.9%	97.6%
100%	96.6%	97.7%	97.4%

5.20.2 Derating Behavior

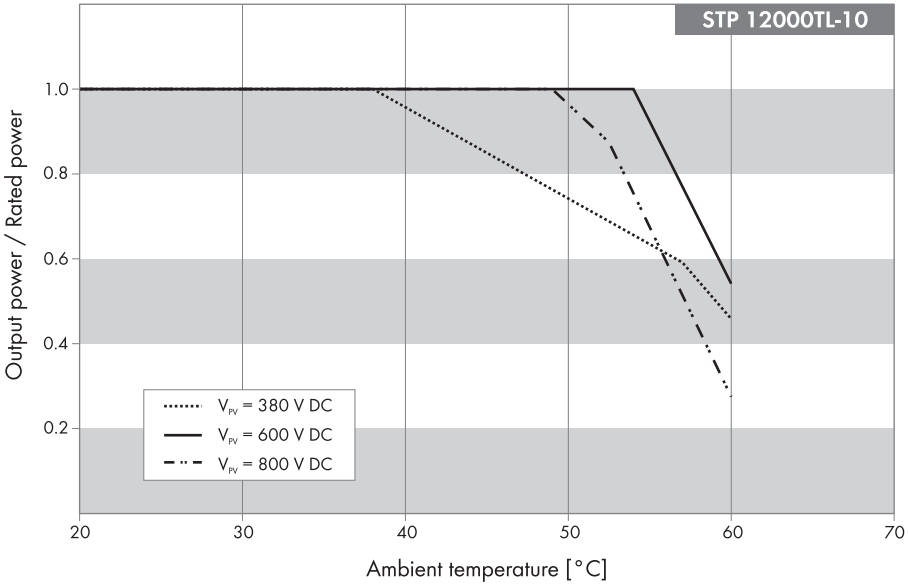

5.21 STP 12000TL-20

5.21.1 Efficiency

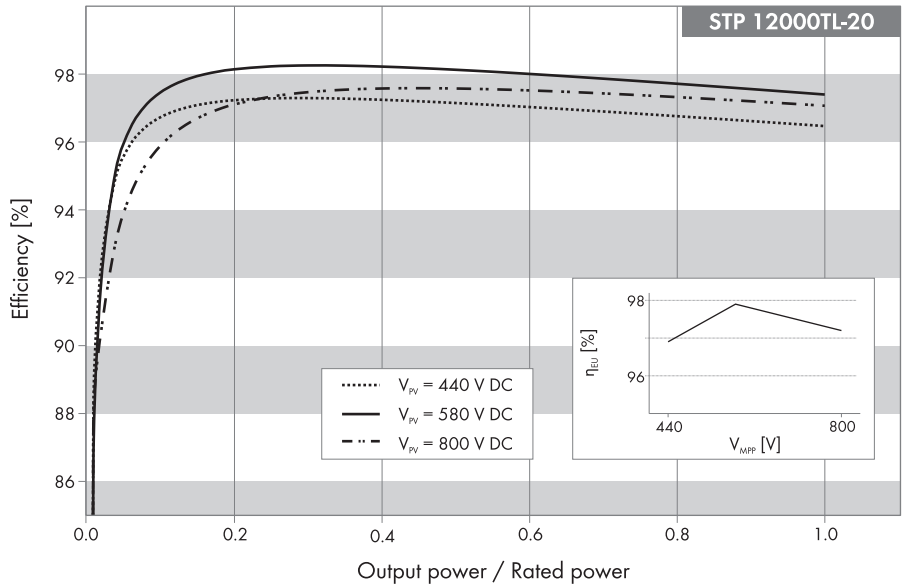


Maximum efficiency, $\eta_{\max}$	98.3%
European efficiency, η_{EU}	97.9%

Efficiency Profile


Standardized output power	Efficiency		
	Minimum MPP voltage 440 V	Rated input voltage 580 V	Maximum MPP voltage 800 V
5%	95.5%	95.9%	93.8%
10%	96.7%	97.4%	95.9%
20%	97.2%	98.1%	97.1%
25%	97.3%	98.2%	97.3%
30%	97.3%	98.3%	97.6%
50%	97.1%	98.1%	97.6%
75%	96.8%	97.8%	97.4%
100%	96.5%	97.4%	97.1%

5.21.2 Derating Behavior

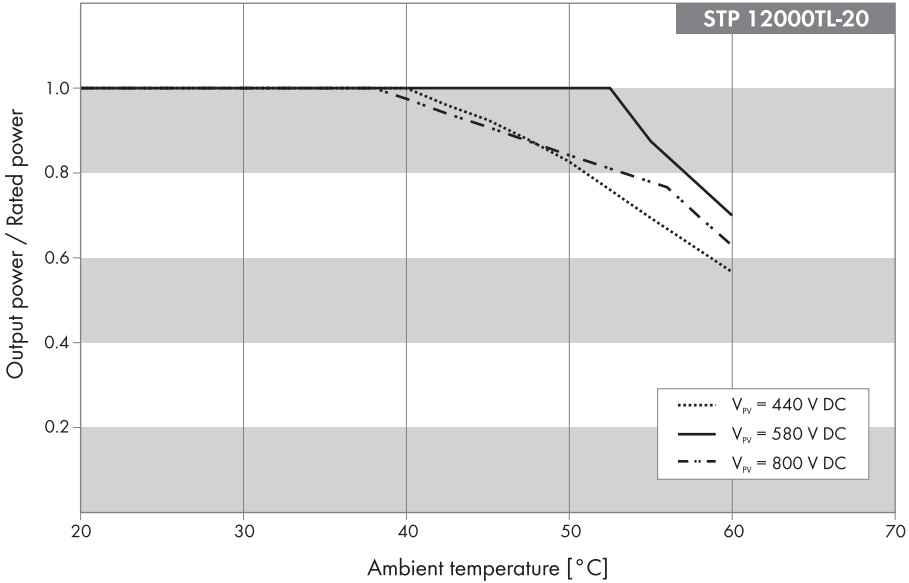

5.22 STP 15000TL-10

5.22.1 Efficiency

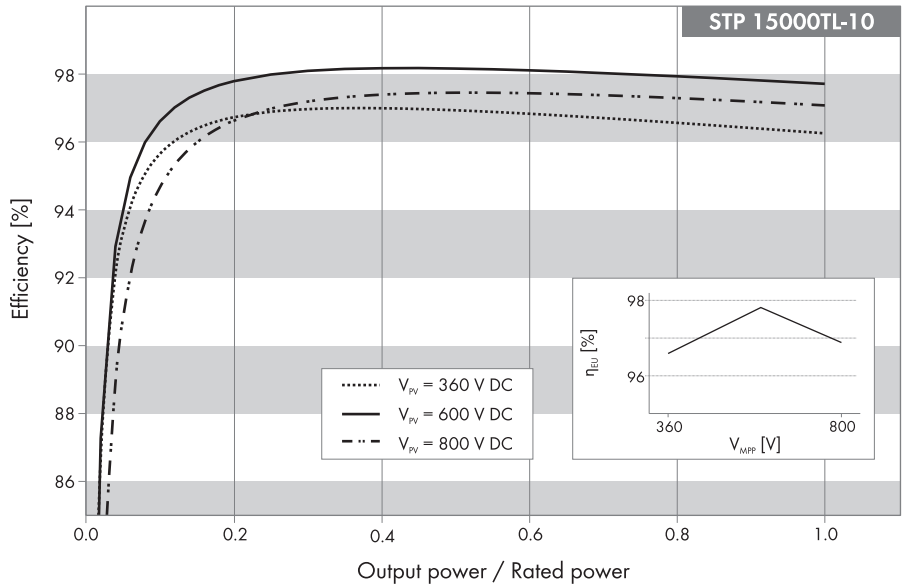


Maximum efficiency, η_{max}	98.2%
European efficiency, η_{EU}	97.8%

Efficiency Profile


Standardized output power	Efficiency		
	Minimum MPP voltage 360 V	Rated input voltage 600 V	Maximum MPP voltage 800 V
5%	93.1%	93.9%	90.5%
10%	95.7%	96.6%	94.7%
20%	96.7%	97.8%	96.6%
25%	96.9%	98.0%	97.0%
30%	97.0%	98.1%	97.2%
50%	96.9%	98.2%	97.5%
75%	96.6%	98.0%	97.3%
100%	96.3%	97.7%	97.1%

5.22.2 Derating Behavior

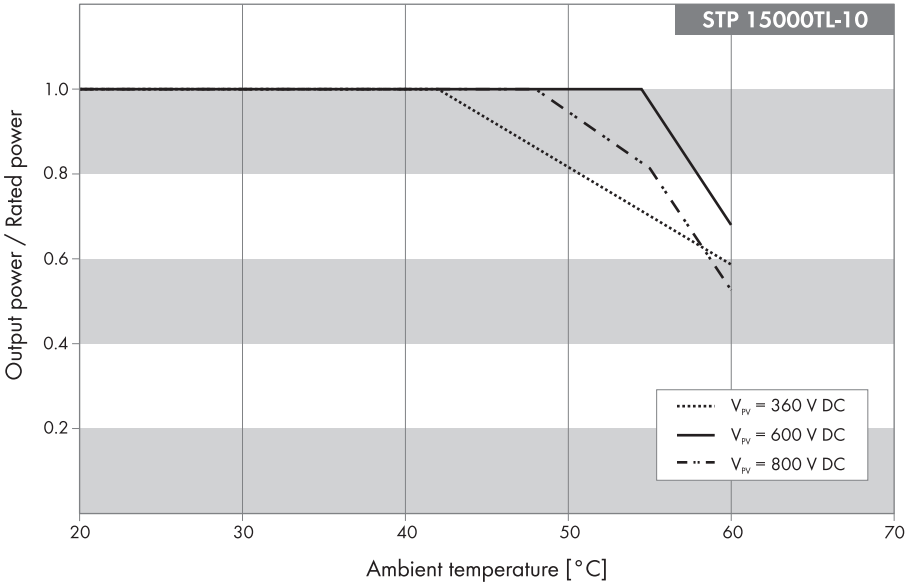

5.23 STP 15000TLEE-10

5.23.1 Efficiency

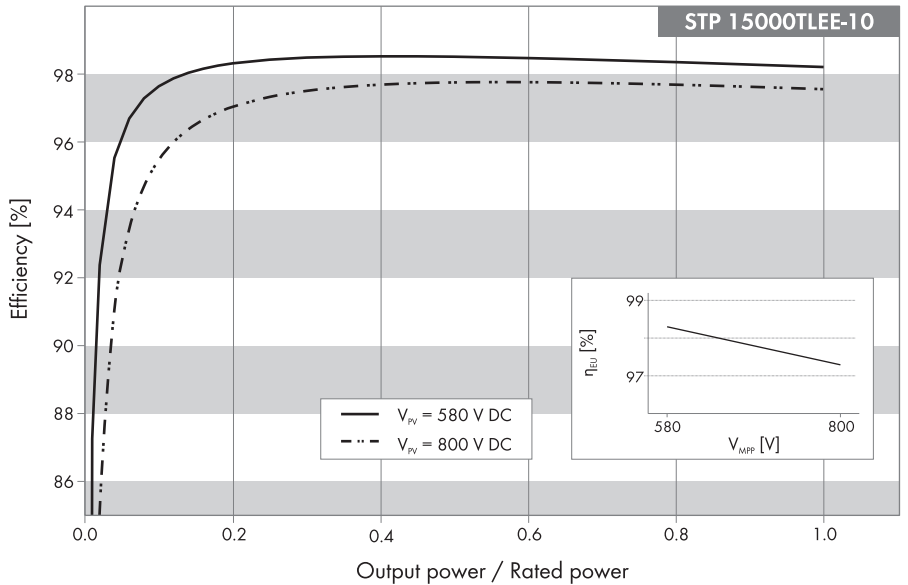


Maximum efficiency, η_{max}	98.5%
European efficiency, η_{EU}	98.3%

Efficiency Profile


Standardized output power	Efficiency	
	Minimum MPP voltage / rated input voltage 580 V	Maximum MPP voltage 800 V
5%	96.1%	92.2%
10%	97.6%	95.5%
20%	98.3%	97.0%
25%	98.4%	97.3%
30%	98.5%	97.5%
50%	98.5%	97.8%
75%	98.4%	97.7%
100%	98.2%	97.6%

5.23.2 Derating Behavior

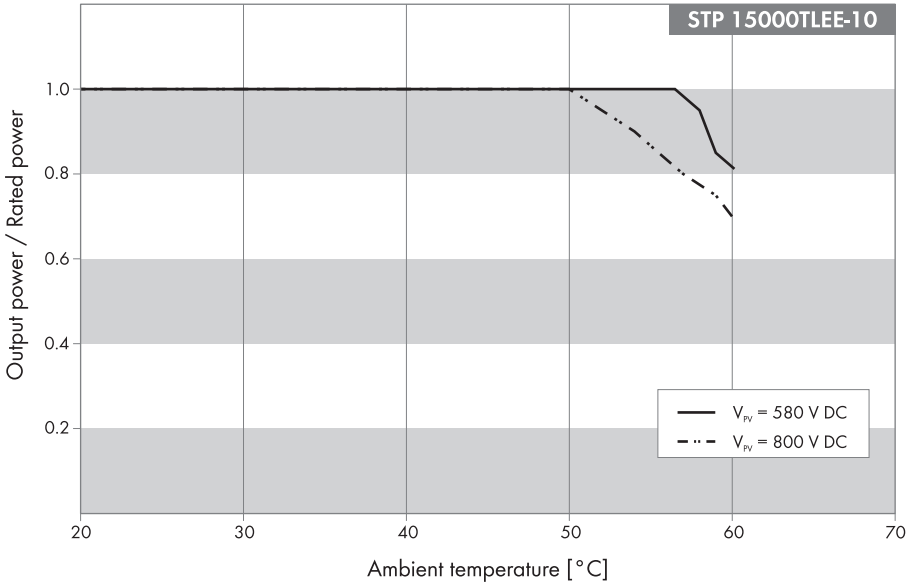

5.24 STP 15000TLHE-10

5.24.1 Efficiency

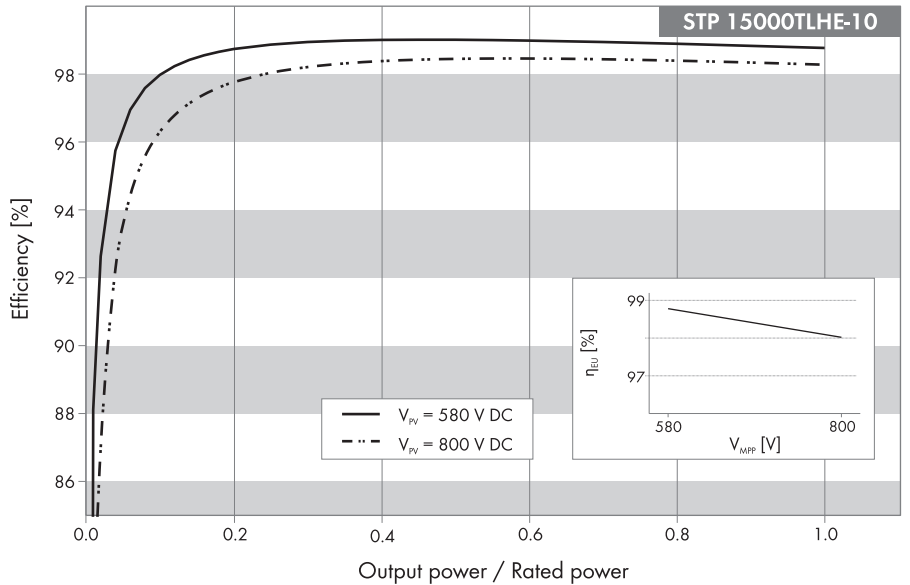


Maximum efficiency, η_{max}	99.0%
European efficiency, η_{EU}	98.7%

Efficiency Profile


Standardized output power	Efficiency	
	Minimum MPP voltage / rated input voltage 580 V	Maximum MPP voltage 800 V
5%	96.4%	93.3%
10%	98.0%	96.3%
20%	98.7%	97.8%
25%	98.9%	98.0%
30%	98.9%	98.2%
50%	99.0%	98.5%
75%	98.9%	98.4%
100%	98.8%	98.3%

5.24.2 Derating Behavior

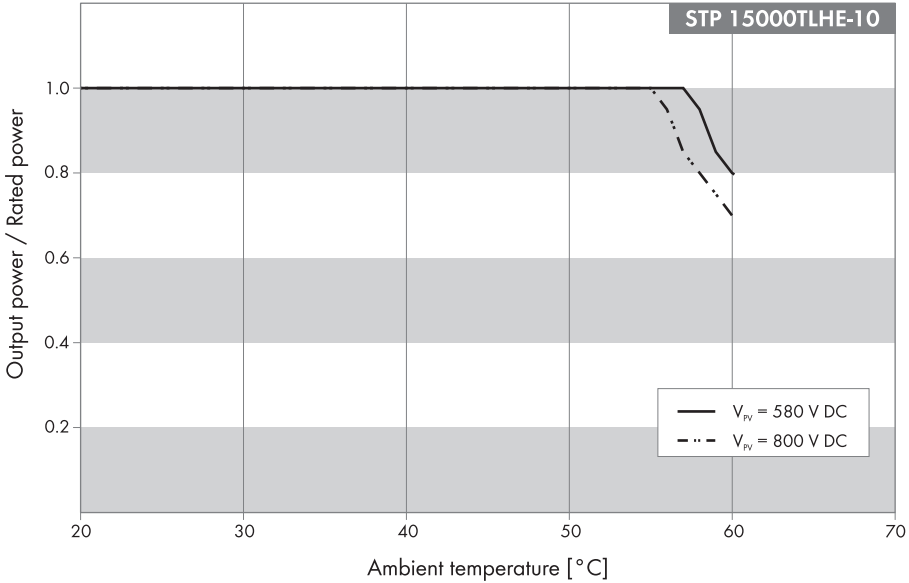

5.25 STP 17000TL-10

5.25.1 Efficiency

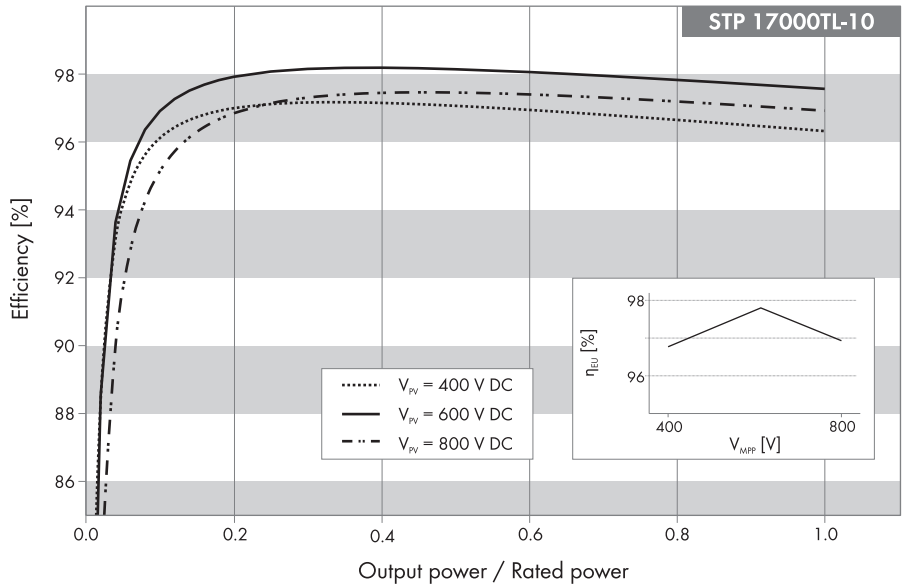


Maximum efficiency, $\eta_{\max}$	98.2%
European efficiency, η_{EU}	97.8%

Efficiency Profile


Standardized output power	Efficiency		
	Minimum MPP voltage 400 V	Rated input voltage 600 V	Maximum MPP voltage 800 V
5%	94.0%	94.5%	91.4%
10%	96.1%	96.9%	95.1%
20%	97.0%	97.9%	96.8%
25%	97.1%	98.1%	97.1%
30%	97.2%	98.2%	97.3%
50%	97.1%	98.1%	97.5%
75%	96.7%	97.9%	97.3%
100%	96.3%	97.6%	96.9%

5.25.2 Derating Behavior

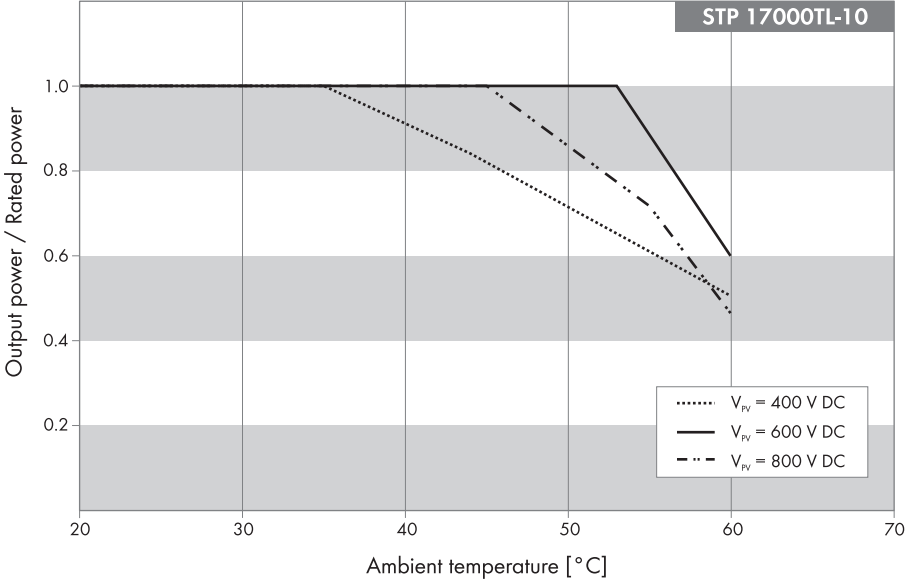

5.26 STP 20000TLEE-10

5.26.1 Efficiency

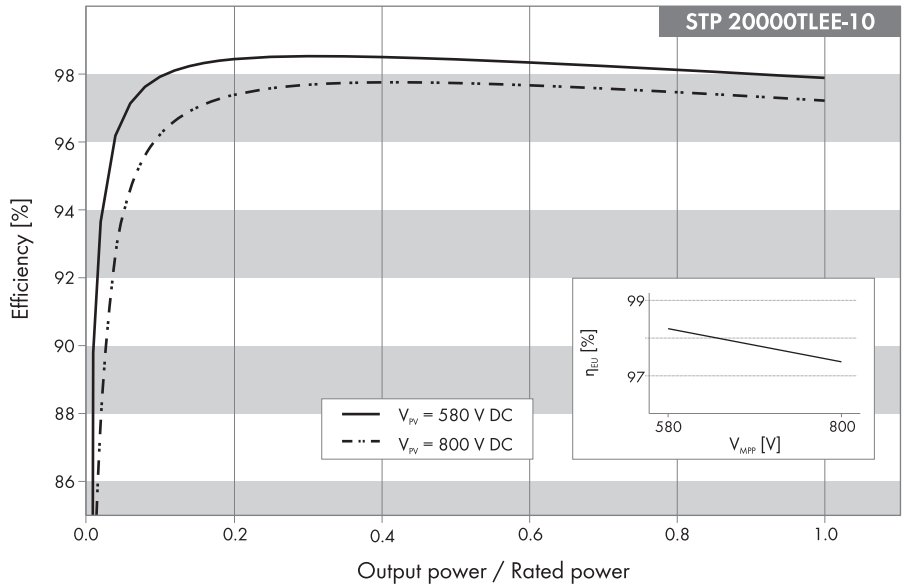


Maximum efficiency, η_{max}	98.5%
European efficiency, η_{EU}	98.2%

Efficiency Profile


Standardized output power	Efficiency	
	Minimum MPP voltage / rated input voltage 580 V	Maximum MPP voltage 800 V
5%	96.7%	93.6%
10%	97.9%	96.2%
20%	98.4%	97.4%
25%	98.5%	97.6%
30%	98.5%	97.7%
50%	98.4%	97.7%
75%	98.2%	97.5%
100%	97.9%	97.2%

5.26.2 Derating Behavior

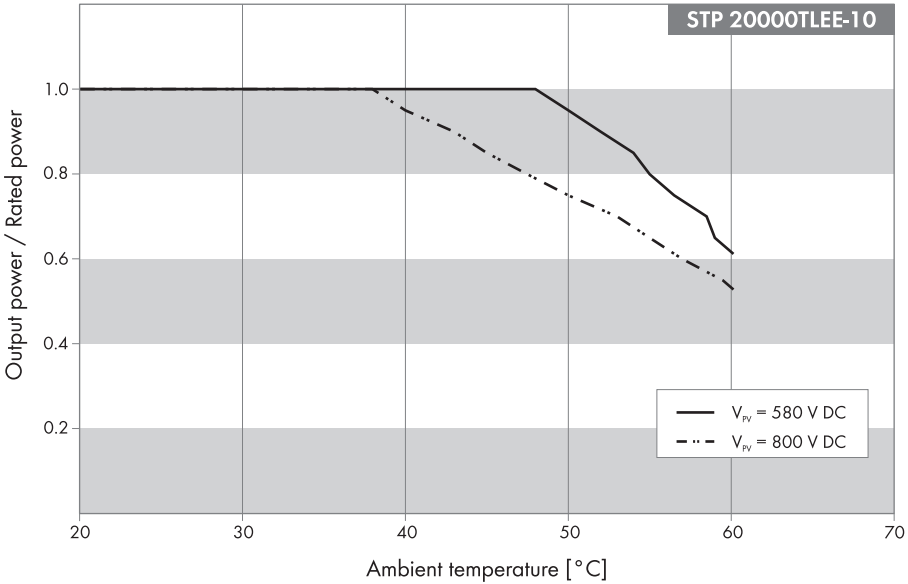

5.27 STP 20000TLEE-JP-11

5.27.1 Efficiency

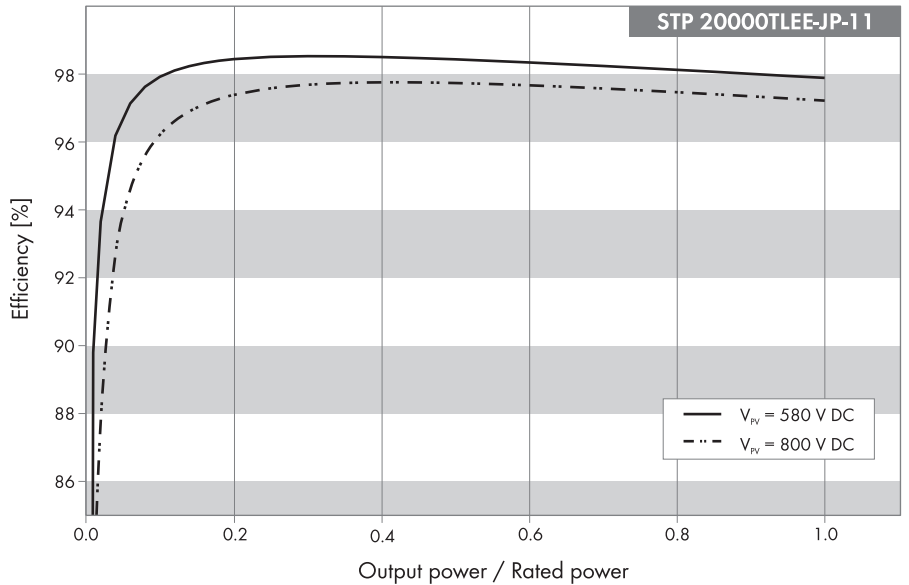


Maximum efficiency, $\eta_{\max}$ 98.5%

Efficiency Profile


Standardized output power	Efficiency	
	Minimum MPP voltage / rated input voltage 580 V	Maximum MPP voltage 800 V
5%	96.7%	93.6%
10%	97.9%	96.2%
20%	98.4%	97.4%
25%	98.5%	97.6%
30%	98.5%	97.7%
50%	98.4%	97.7%
75%	98.2%	97.5%
100%	97.9%	97.2%

5.27.2 Derating Behavior

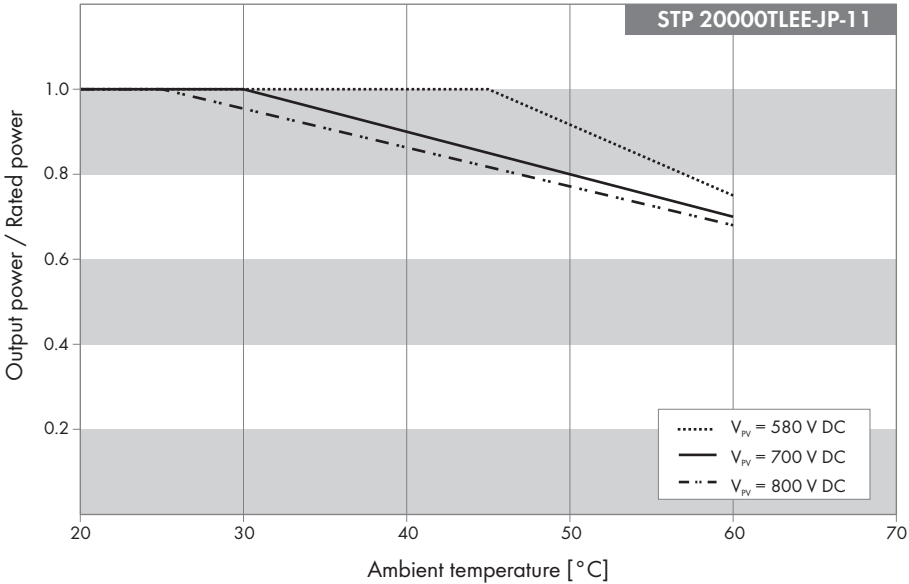

5.28 STP 20000TLHE-10

5.28.1 Efficiency

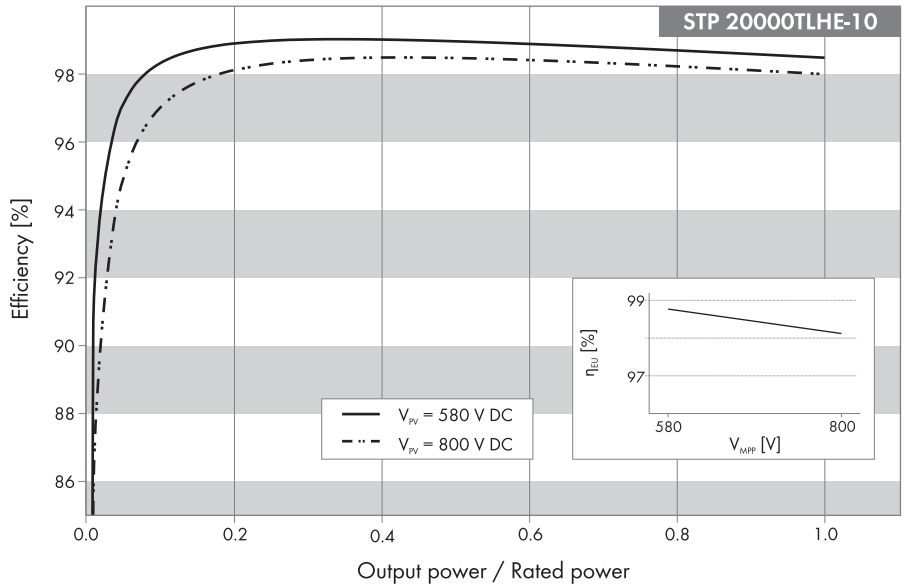


Maximum efficiency, $\eta_{\max}$	99.0%
European weighted efficiency, η_{EU}	98.7%

Efficiency Profile


Standardized output power	Efficiency	
	Minimum MPP voltage / rated input voltage 580 V	Maximum MPP voltage 800 V
5%	97.0%	94.7%
10%	98.3%	97.0%
20%	98.9%	98.1%
25%	99.0%	98.3%
30%	99.0%	98.4%
50%	99.0%	98.5%
75%	98.8%	98.3%
100%	98.5%	98.0%

5.28.2 Derating Behavior

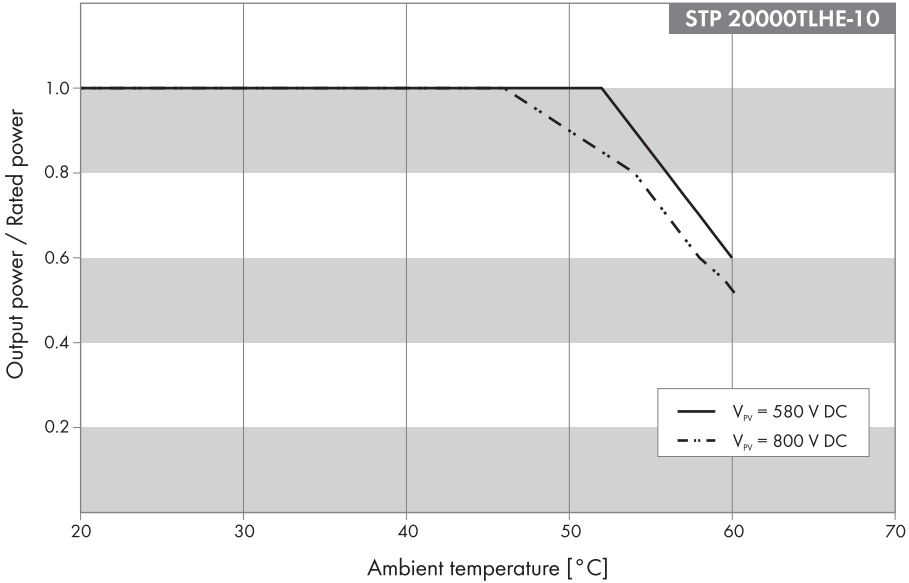

5.29 STP 15000TL-30

5.29.1 Efficiency

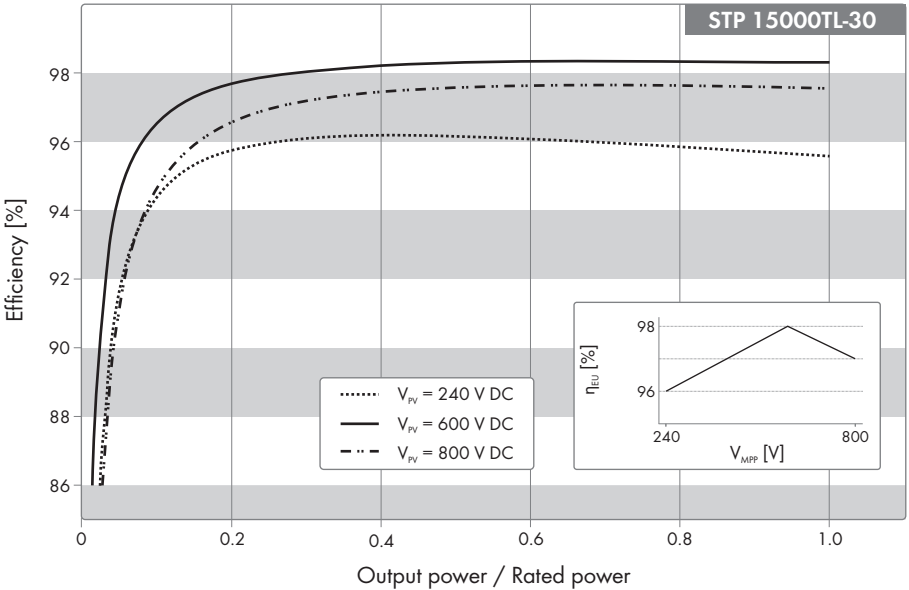


Maximum efficiency, η_{max}	98.3 %
European weighted efficiency, η_{EU}	98.0 %

Efficiency Profile


Standardized output power	Efficiency		
	Minimum MPP voltage 240 V	Rated input voltage 600 V	Maximum MPP voltage 800 V
5 %	91.4 %	94.3 %	90.9 %
10 %	94.4 %	96.5 %	94.6 %
20 %	95.7 %	97.7 %	96.6 %
25 %	96.0 %	97.9 %	96.9 %
30 %	96.1 %	98.0 %	97.2 %
50 %	96.2 %	98.3 %	97.6 %
75 %	95.9 %	98.3 %	97.6 %
100 %	95.6 %	98.3 %	97.5 %

5.29.2 Derating Behavior

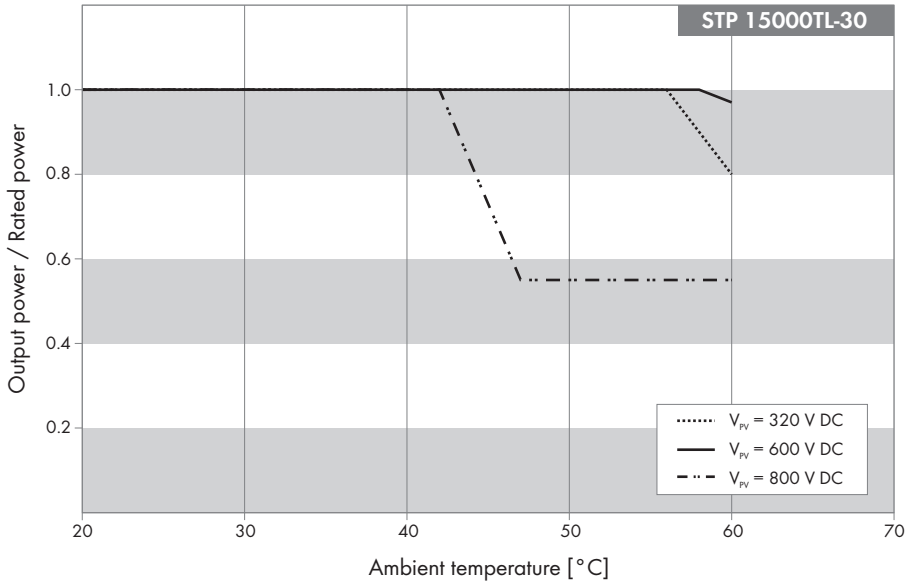

5.30 STP 20000TL-30

5.30.1 Efficiency

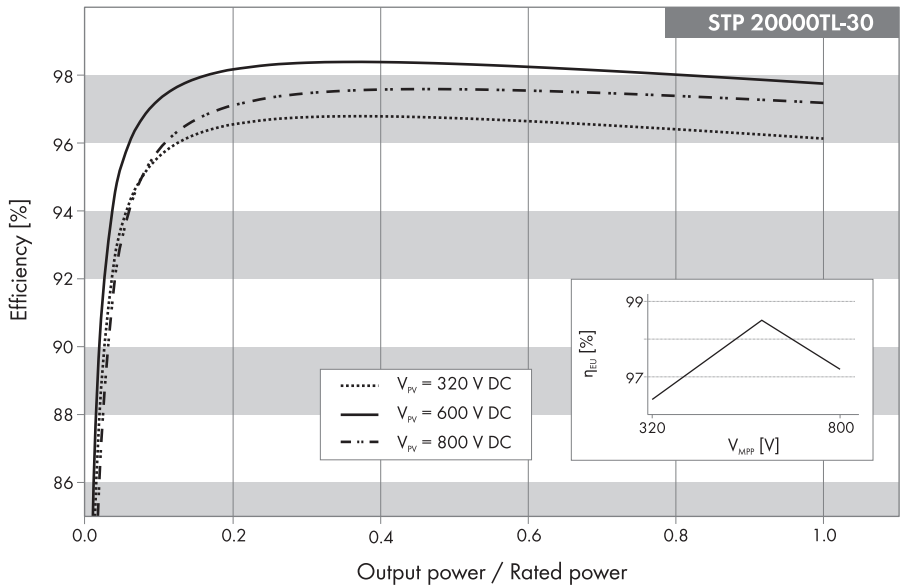


Maximum efficiency, η_{max} 98.4%

European weighted efficiency, η_{EU} 98.0%

Efficiency Profile


Standardized output power	Efficiency		
	Minimum MPP voltage 320 V	Rated input voltage 600 V	Maximum MPP voltage 800 V
5%	93.5%	95.3%	93.1%
10%	95.6%	97.3%	95.8%
20%	96.5%	98.2%	97.1%
25%	96.7%	98.3%	97.3%
30%	96.8%	98.4%	97.5%
50%	96.7%	98.3%	97.6%
75%	96.5%	98.1%	97.4%
100%	96.1%	97.7%	97.2%

5.30.2 Derating Behavior

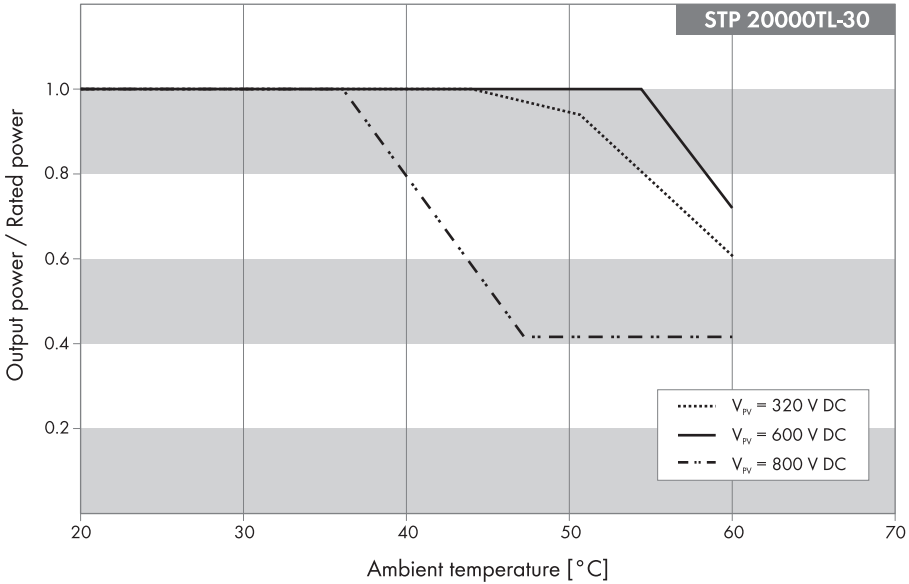

5.31 STP 25000TL-30

5.31.1 Efficiency

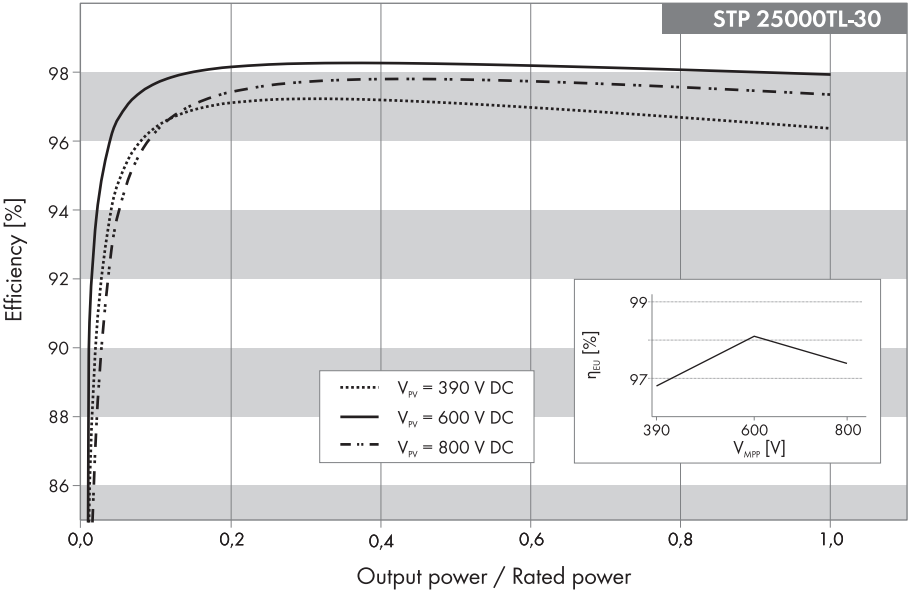


Maximum efficiency, η_{max} 98.3%

European weighted efficiency, η_{EU} 98.1%

Efficiency Profile


Standardized output power	Efficiency		
	Minimum MPP voltage 390 V	Rated input voltage 600 V	Maximum MPP voltage 800 V
5%	94.8%	96.7%	93.9%
10%	96.4%	97.7%	96.3%
20%	97.1%	98.2%	97.4%
25%	97.2%	98.2%	97.6%
30%	97.2%	98.3%	97.7%
50%	97.1%	98.2%	97.8%
75%	96.8%	98.1%	97.6%
100%	96.4%	97.9%	97.4%

5.31.2 Derating Behavior

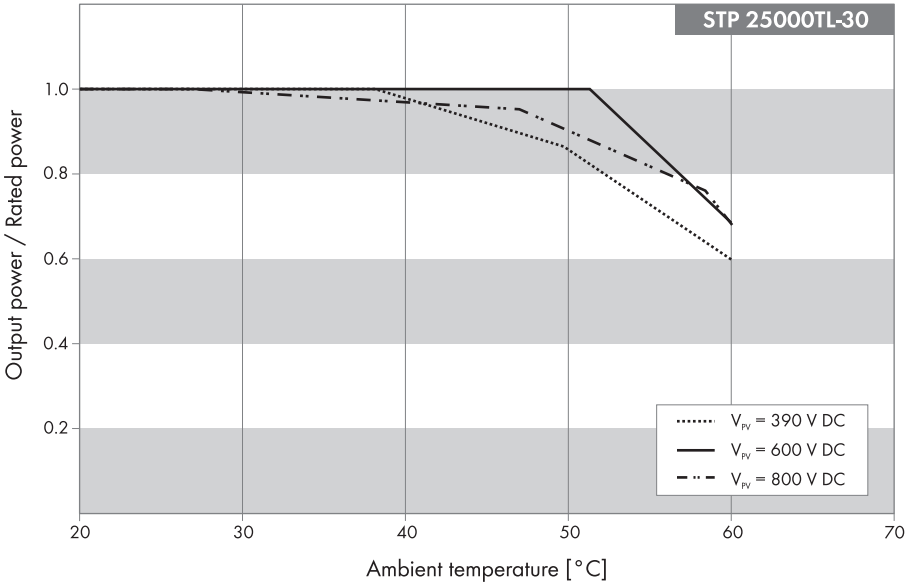

5.32 STP 24500TL-JP-30

5.32.1 Efficiency

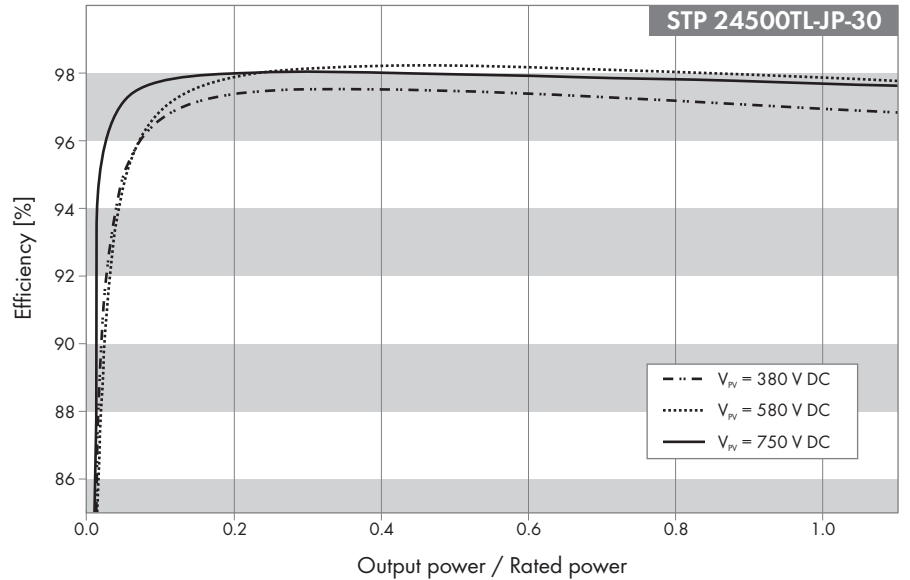


Maximum efficiency, η_{max}	98.8%
European weighted efficiency, η_{EU}	98.0%

Efficiency Profile


Standardized output power	Efficiency		
	Minimum MPP voltage 380 V	Rated input voltage 580 V	Maximum MPP voltage 750 V
5%	95.2%	97.2%	95.1%
10%	96.7%	97.8%	97.0%
20%	97.3%	98.0%	97.9%
25%	97.4%	98.0%	98.1%
30%	97.4%	98.0%	98.1%
50%	97.3%	97.9%	98.2%
75%	97.0%	97.7%	98.0%
100%	96.7%	97.5%	97.7%

5.32.2 Derating Behavior

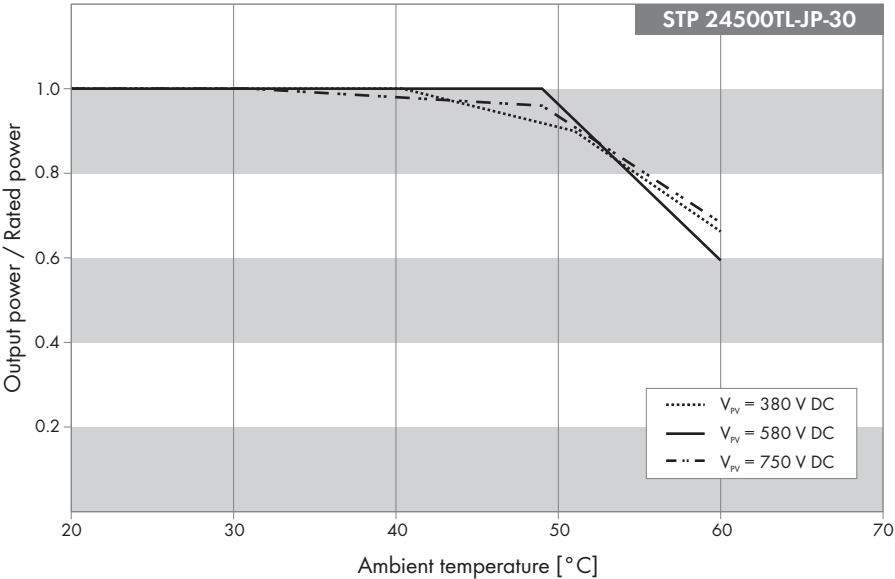

5.33 STP 25000TL-JP-30

5.33.1 Efficiency

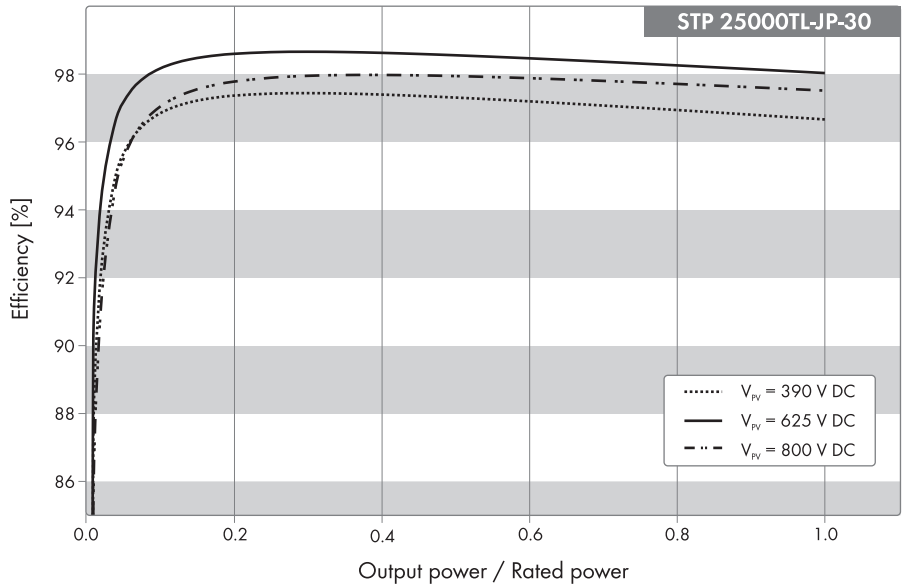


Maximum efficiency, η_{max}	98.7%
European weighted efficiency, η_{EU}	98.4%

Efficiency Profile

Standardized output power	Efficiency		
	Minimum MPP voltage 390 V	Rated input voltage 625 V	Maximum MPP voltage 800 V
5%	95.6%	97.1%	95.4%
10%	96.8%	98.2%	97.0%
20%	97.4%	98.6%	97.8%
25%	97.4%	98.6%	97.9%
30%	97.4%	98.7%	98.0%
50%	97.3%	98.6%	97.9%
75%	97.0%	98.3%	97.8%
100%	96.7%	98.0%	97.5%


5.33.2 Derating Behavior

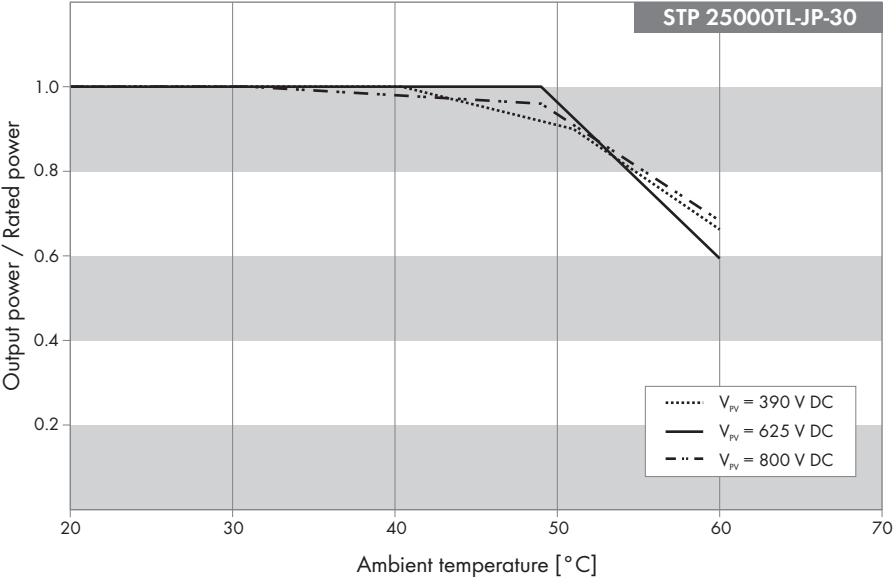

6 Sunny Mini Central

6.1 SMC 4600A / SMC 4600A-11

6.1.1 Efficiency

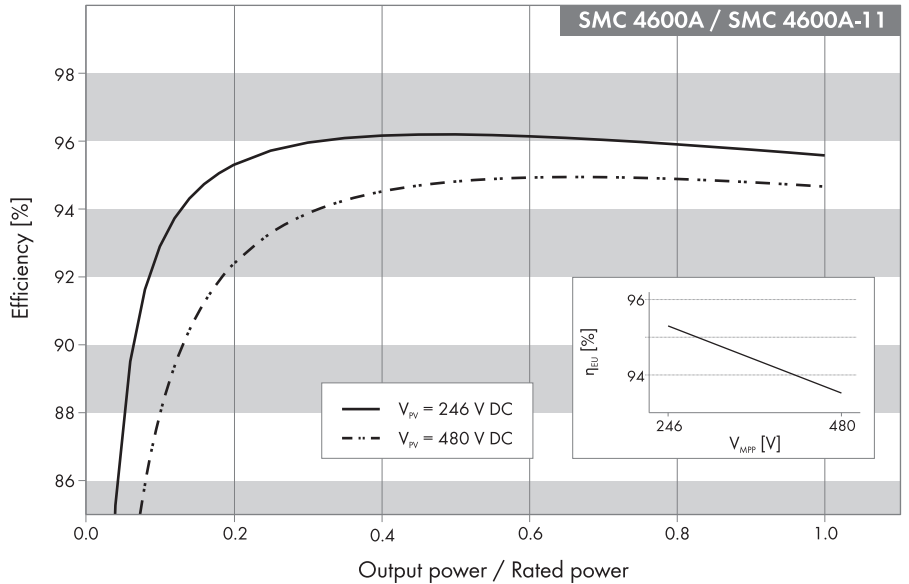


Maximum efficiency, $\eta_{\max}$	96.1%
European efficiency, η_{EU}	95.3%

Efficiency Profile

Standardized output power	Efficiency	
	Minimum MPP voltage / rated input voltage 246 V	Maximum MPP voltage 480 V
5%	87.4%	80.1%
10%	92.9%	87.9%
20%	95.3%	92.4%
25%	95.7%	93.3%
30%	96.0%	93.9%
50%	96.1%	94.8%


Standardized output power	Efficiency	
	Minimum MPP voltage / rated input voltage	Maximum MPP voltage
	246 V	480 V
75%	96.0%	94.9%
100%	95.6%	94.7%

6.1.2 Derating Behavior

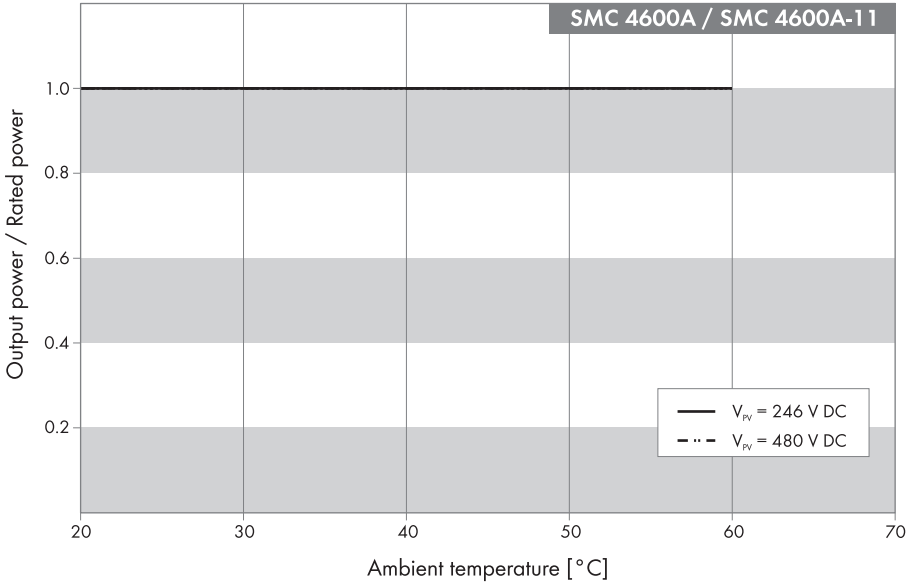

6.2 SMC 5000A / SMC 5000A-11

6.2.1 Efficiency

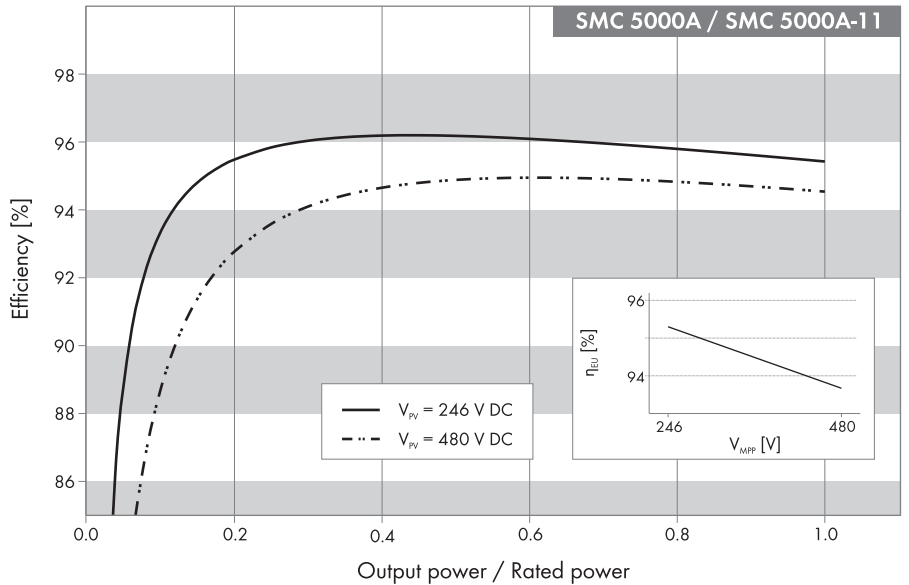


Maximum efficiency, $\eta_{\max}$	96.1%
European efficiency, η_{EU}	95.3%

Efficiency Profile


Standardized output power	Efficiency	
	Minimum MPP voltage / rated input voltage 246 V	Maximum MPP voltage 480 V
5%	88.1%	81.2%
10%	93.2%	88.6%
20%	95.4%	92.8%
25%	95.7%	93.6%
30%	95.9%	94.1%
50%	96.1%	94.9%
75%	95.8%	94.9%
100%	95.3%	94.5%

6.2.2 Derating Behavior

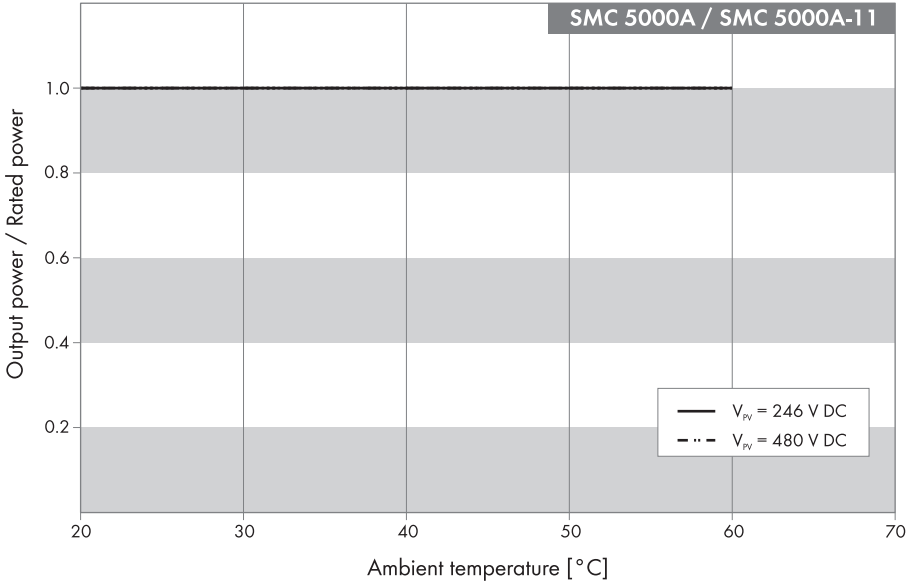

6.3 SMC 6000A / SMC 6000A-11

6.3.1 Efficiency

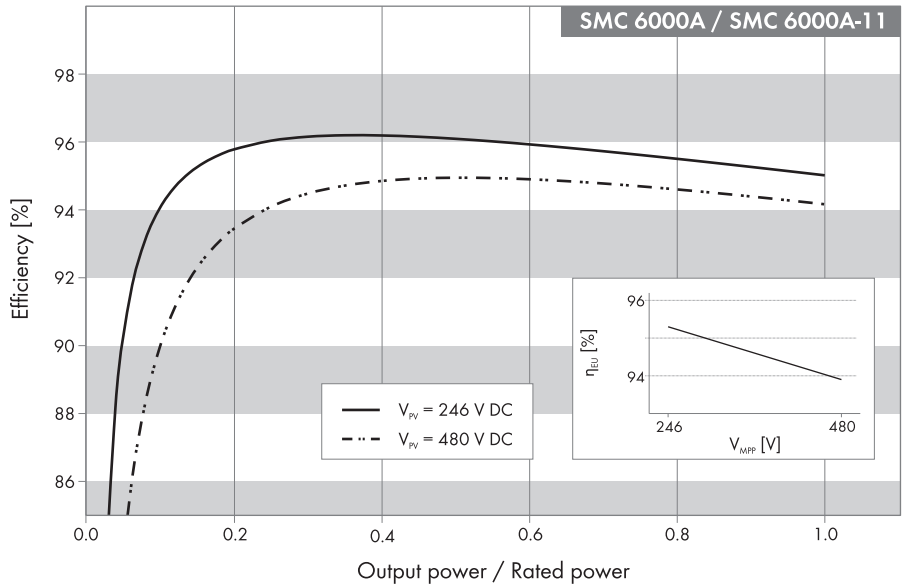


Maximum efficiency, $\eta_{\max}$	96.1%
European efficiency, η_{EU}	95.3%

Efficiency Profile


Standardized output power	Efficiency	
	Minimum MPP voltage / rated input voltage 246 V	Maximum MPP voltage 480 V
5%	89.8%	83.4%
10%	94.0%	90.0%
20%	95.7%	93.4%
25%	96.0%	94.1%
30%	96.1%	94.5%
50%	96.0%	94.9%
75%	95.6%	94.7%
100%	94.9%	94.2%

6.3.2 Derating Behavior

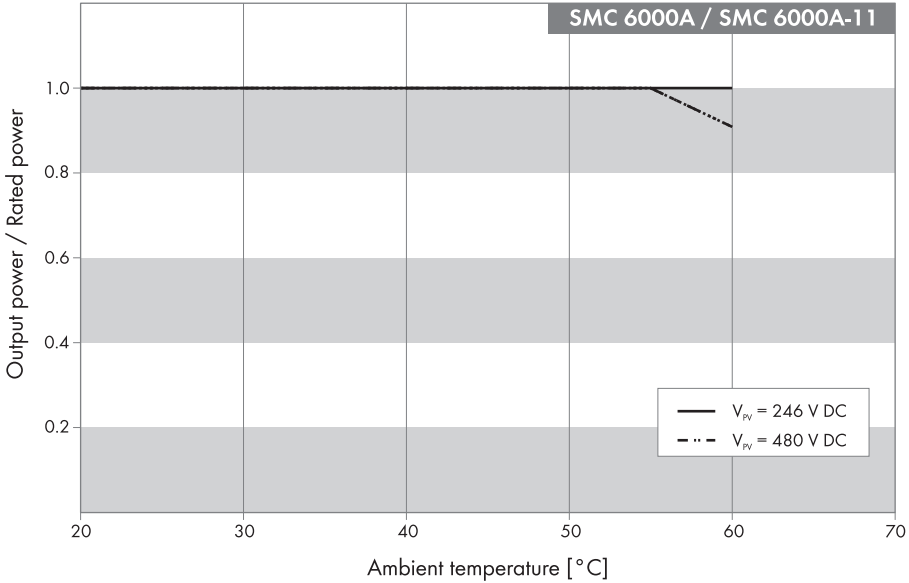

6.4 SMC 6000TL

6.4.1 Efficiency

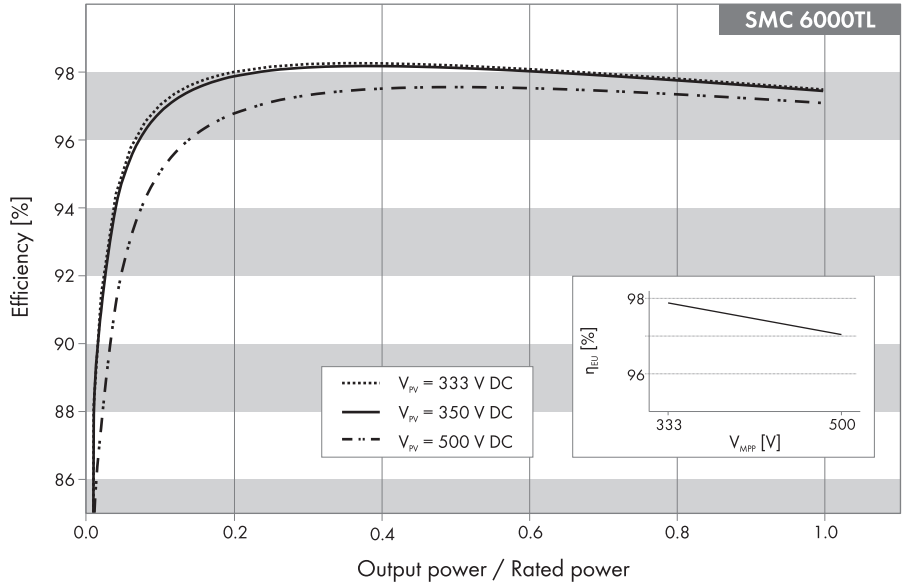


Maximum efficiency, $\eta_{\max}$	98.0%
European efficiency, η_{EU}	97.7%

Efficiency Profile


Standardized output power	Efficiency		
	Minimum MPP voltage 333 V	Rated input voltage 350 V	Maximum MPP voltage 500 V
5%	95.1%	94.8%	92.2%
10%	97.0%	96.8%	95.1%
20%	98.0%	97.9%	96.8%
25%	98.0%	98.0%	97.1%
30%	98.0%	98.0%	97.3%
50%	98.0%	98.0%	97.6%
75%	97.9%	97.8%	97.4%
100%	97.5%	97.5%	97.1%

6.4.2 Derating Behavior

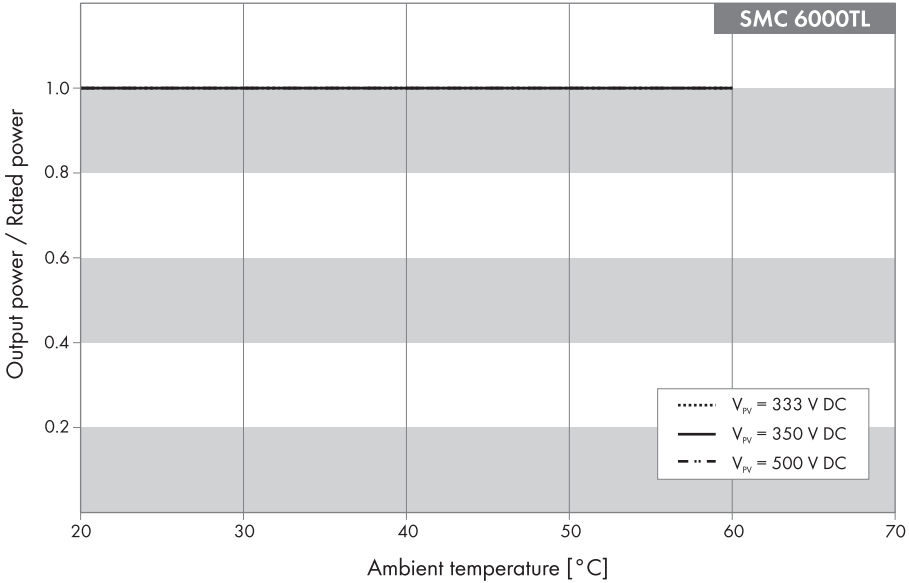

6.5 SMC 7000HV-11

6.5.1 Efficiency

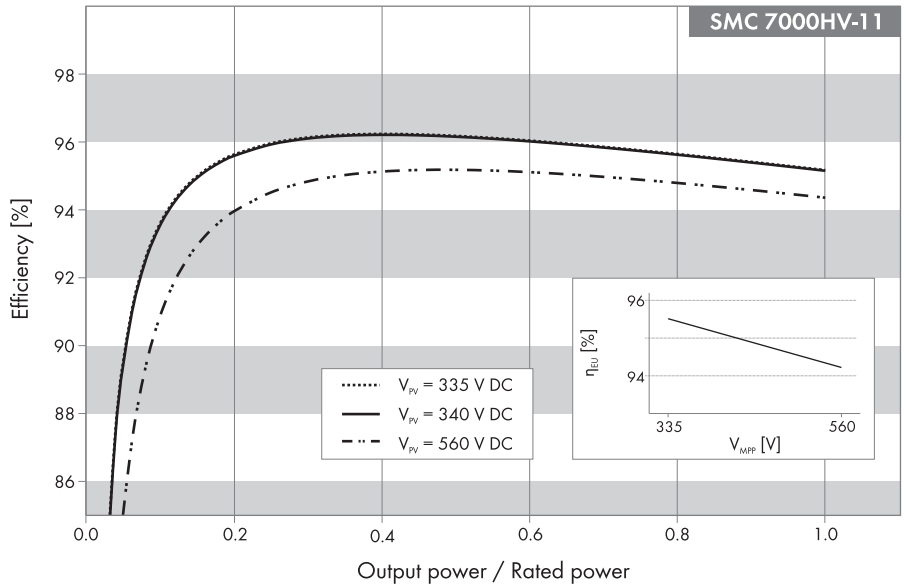


Maximum efficiency, $\eta_{\max}$	96.2%
European efficiency, η_{EU}	95.5%

Efficiency Profile


Standardized output power	Efficiency		
	Minimum MPP voltage 335 V	Rated input voltage 340 V	Maximum MPP voltage 560 V
5%	89.1%	89.0%	84.5%
10%	93.6%	93.5%	90.8%
20%	95.6%	95.6%	93.9%
25%	95.9%	95.9%	94.5%
30%	96.1%	96.1%	94.8%
50%	96.2%	96.1%	95.2%
75%	95.7%	95.7%	94.9%
100%	95.1%	95.1%	94.3%

6.5.2 Derating Behavior

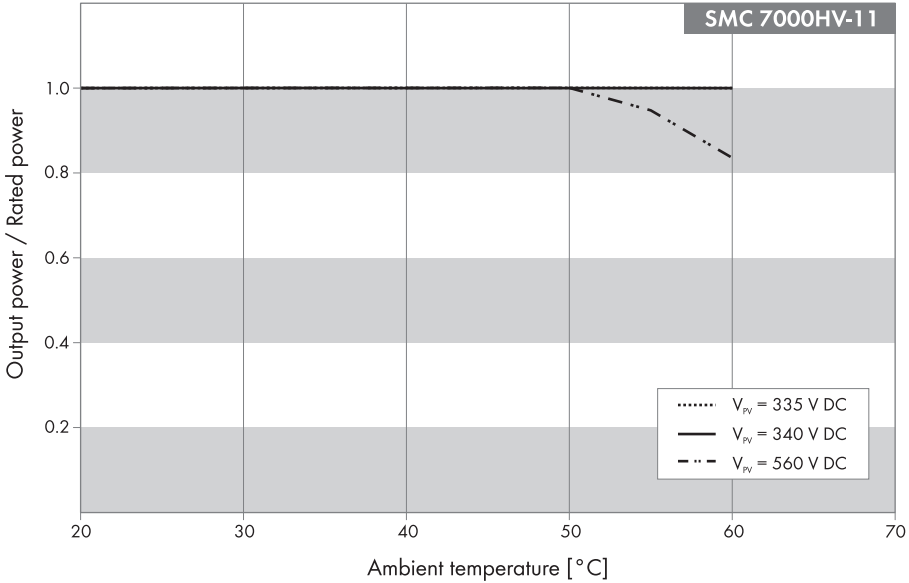

6.6 SMC 7000TL

6.6.1 Efficiency

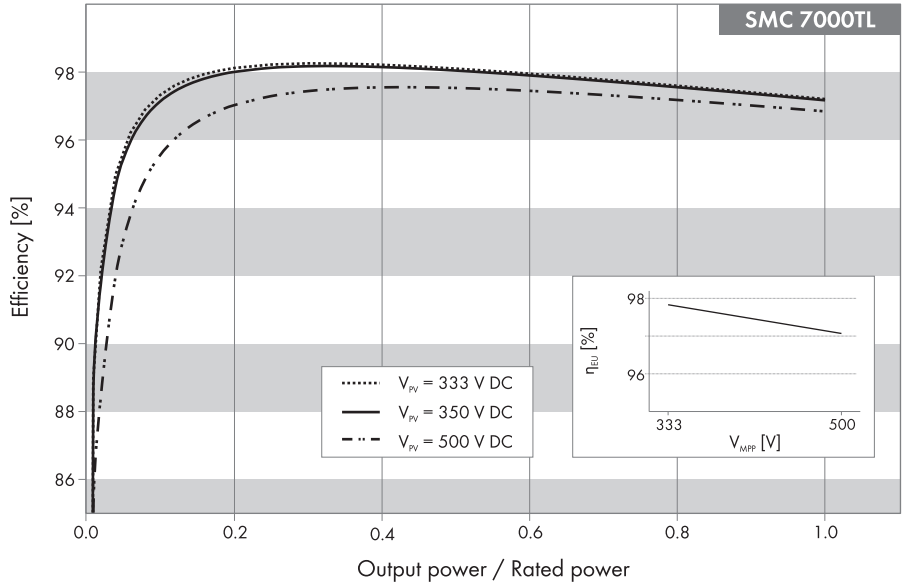


Maximum efficiency, $\eta_{\max}$	98.0%
European efficiency, η_{EU}	97.7%

Efficiency Profile


Standardized output power	Efficiency		
	Minimum MPP voltage 333 V	Rated input voltage 350 V	Maximum MPP voltage 500 V
5%	95.6%	95.3%	92.9%
10%	97.3%	97.1%	95.5%
20%	98.0%	98.0%	97.0%
25%	98.0%	98.0%	97.3%
30%	98.0%	98.0%	97.4%
50%	98.0%	98.0%	97.5%
75%	97.7%	97.7%	97.3%
100%	97.2%	97.2%	96.9%

6.6.2 Derating Behavior

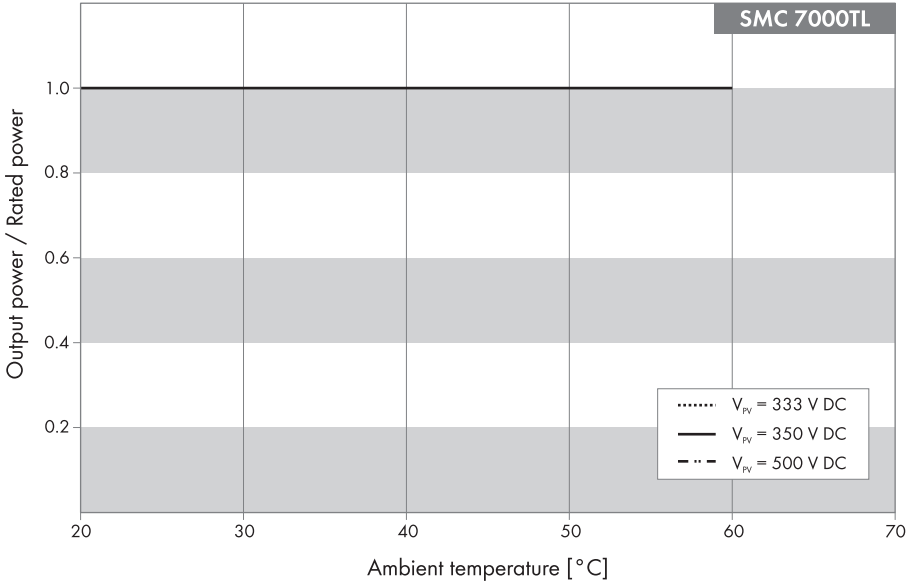

6.7 SMC 8000TL

6.7.1 Efficiency

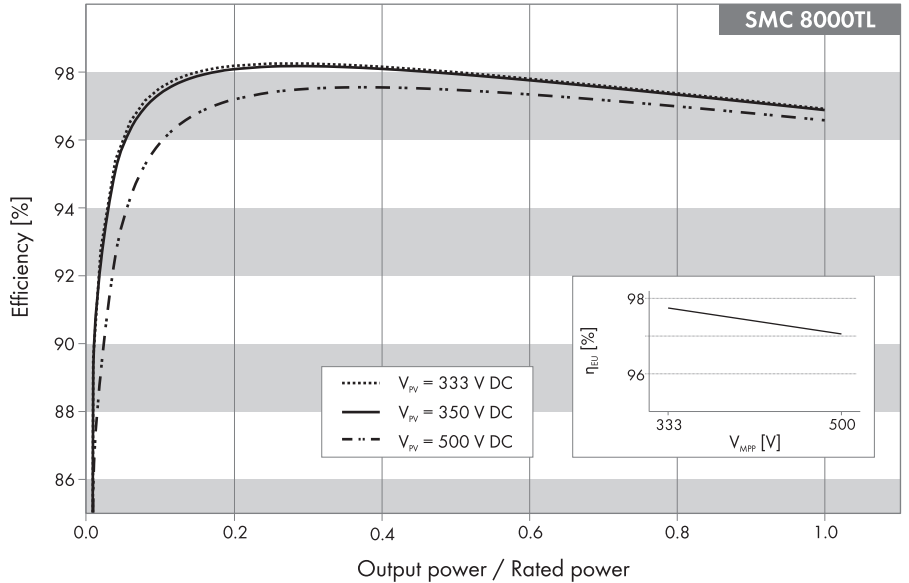


Maximum efficiency, $\eta_{\max}$	98.0%
European efficiency, η_{EU}	97.7%

Efficiency Profile


Standardized output power	Efficiency		
	Minimum MPP voltage 333 V	Rated input voltage 350 V	Maximum MPP voltage 500 V
5%	96.0%	95.7%	93.4%
10%	97.5%	97.4%	95.9%
20%	98.0%	98.0%	97.2%
25%	98.0%	98.0%	97.4%
30%	98.0%	98.0%	97.5%
50%	98.0%	98.0%	97.5%
75%	97.5%	97.5%	97.1%
100%	96.9%	96.9%	96.6%

6.7.2 Derating Behavior

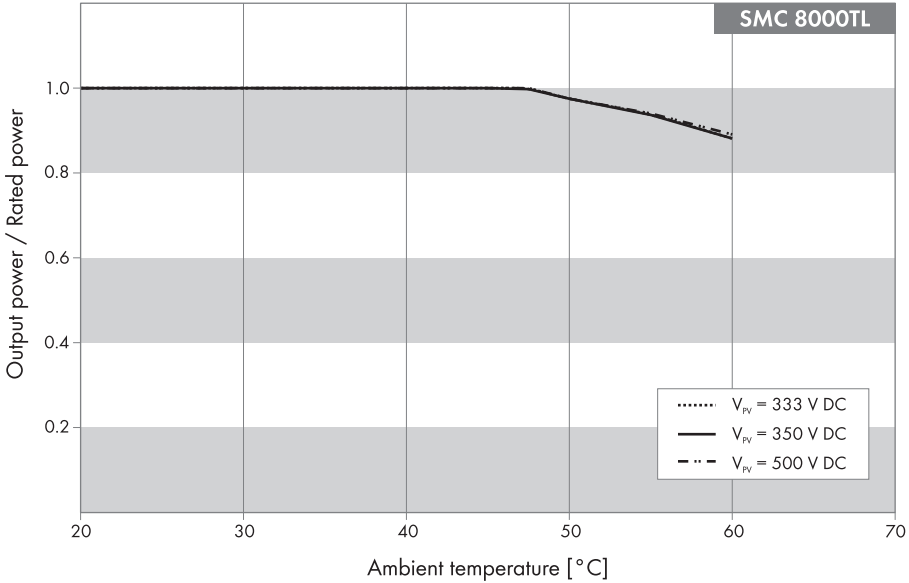

6.8 SMC 9000TL-10

6.8.1 Efficiency

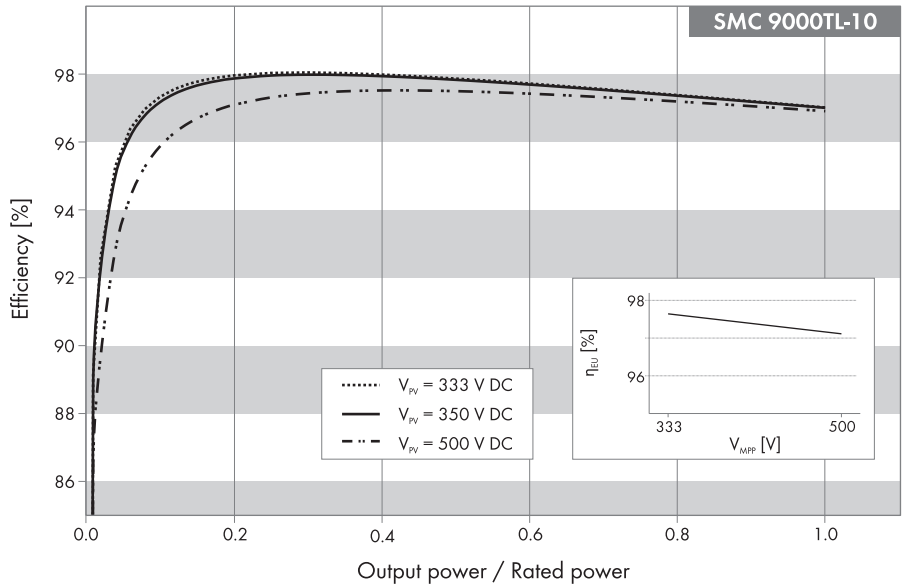


Maximum efficiency, η_{max}	98.0%
European efficiency, η_{EU}	97.6%

Efficiency Profile


Standardized output power	Efficiency		
	Minimum MPP voltage 333 V	Rated input voltage 350 V	Maximum MPP voltage 500 V
5%	95.8%	95.6%	93.6%
10%	97.3%	97.2%	95.9%
20%	98.0%	97.9%	97.1%
25%	98.0%	98.0%	97.3%
30%	98.0%	98.0%	97.4%
50%	97.9%	97.8%	97.5%
75%	97.5%	97.5%	97.3%
100%	97.0%	97.0%	96.9%

6.8.2 Derating Behavior

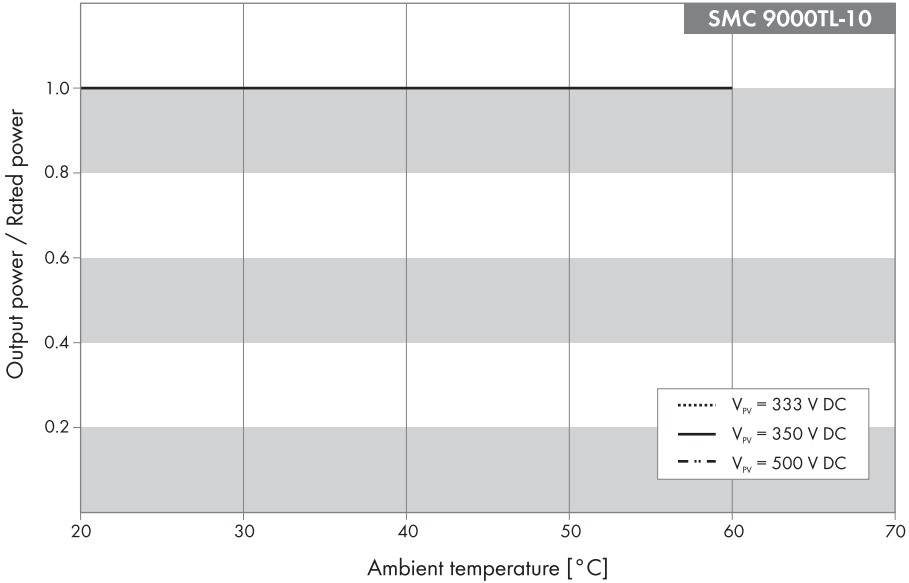

6.9 SMC 9000TLRP-10

6.9.1 Efficiency

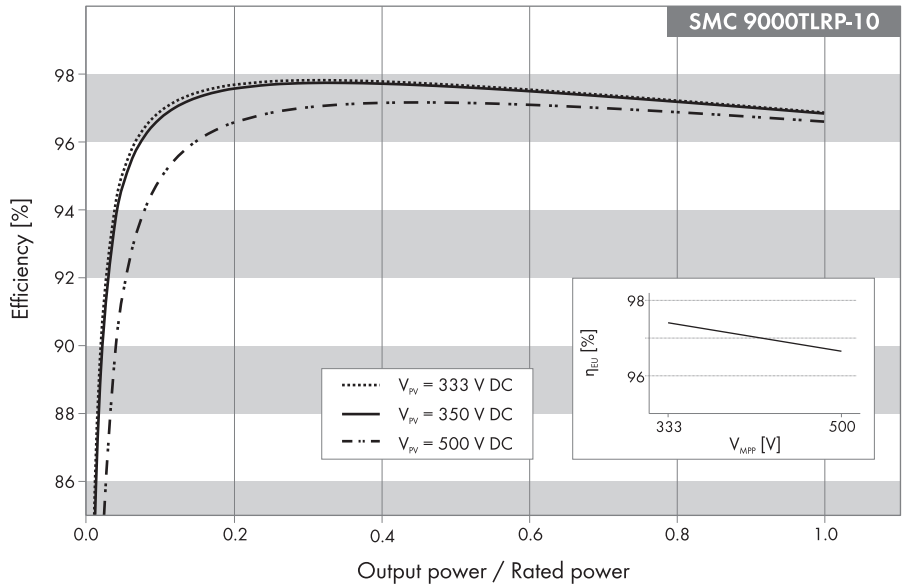


Maximum efficiency, η_{max}	97.7%
European efficiency, η_{EU}	97.3%

Efficiency Profile


Standardized output power	Efficiency		
	Minimum MPP voltage 333 V	Rated input voltage 350 V	Maximum MPP voltage 500 V
5%	95.0%	94.6%	91.3%
10%	96.9%	96.7%	94.9%
20%	97.7%	97.6%	96.6%
25%	97.7%	97.7%	96.9%
30%	97.7%	97.7%	97.0%
50%	97.7%	97.6%	97.2%
75%	97.3%	97.3%	96.9%
100%	96.9%	96.8%	96.6%

6.9.2 Derating Behavior

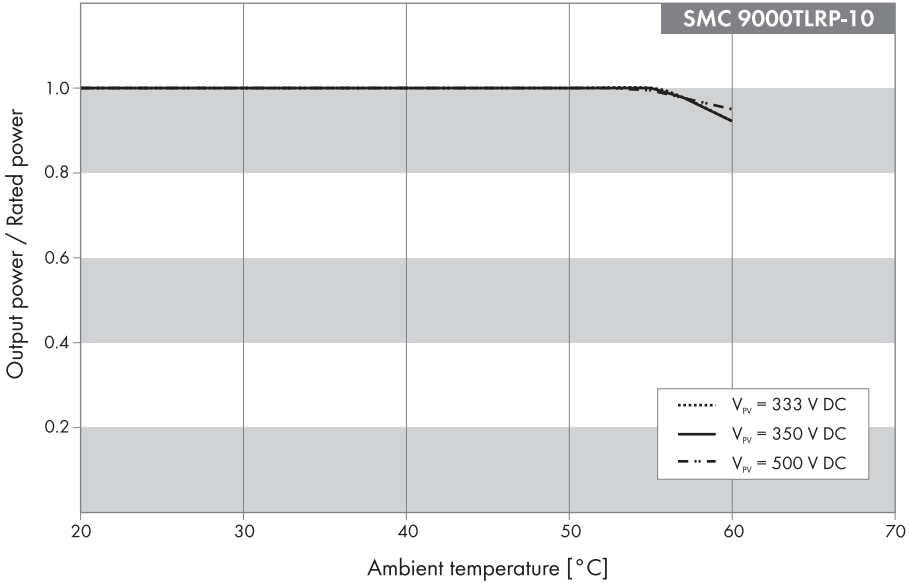

6.10 SMC 10000TL-10

6.10.1 Efficiency

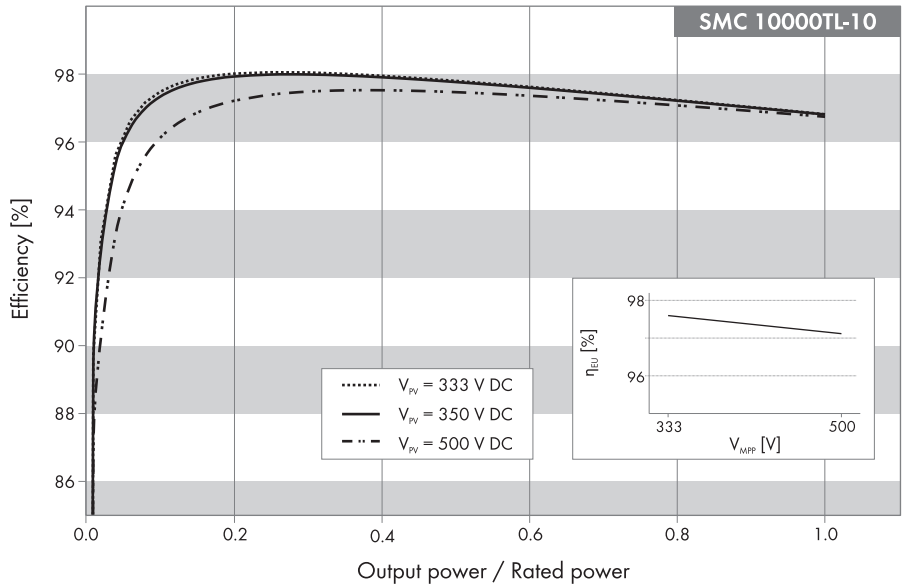


Maximum efficiency, $\eta_{\max}$	98.0%
European efficiency, η_{EU}	97.5%

Efficiency Profile


Standardized output power	Efficiency		
	Minimum MPP voltage 333 V	Rated input voltage 350 V	Maximum MPP voltage 500 V
5%	96.1%	95.9%	94.0%
10%	97.5%	97.3%	96.1%
20%	98.0%	97.9%	97.2%
25%	98.0%	98.0%	97.4%
30%	98.0%	98.0%	97.5%
50%	97.8%	97.8%	97.5%
75%	97.3%	97.3%	97.2%
100%	96.8%	96.8%	96.7%

6.10.2 Derating Behavior

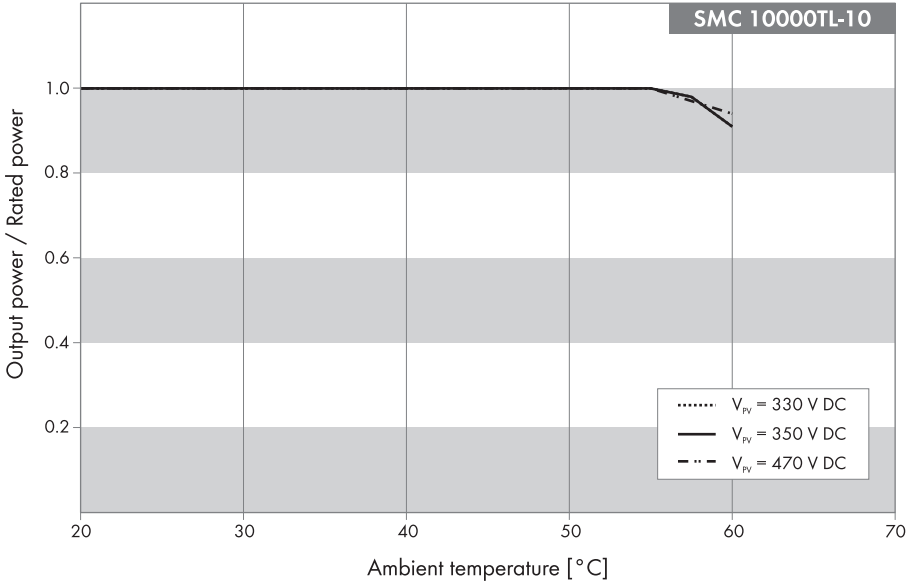

6.11 SMC 10000TLRP-10

6.11.1 Efficiency

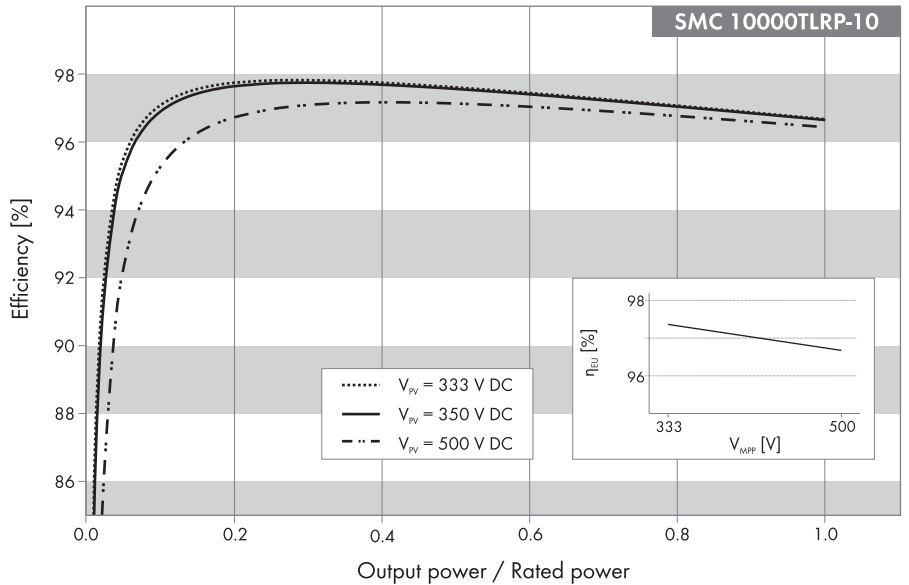


Maximum efficiency, η_{max}	97.7%
European efficiency, η_{EU}	97.2%

Efficiency Profile


Standardized output power	Efficiency		
	Minimum MPP voltage 333 V	Rated input voltage 350 V	Maximum MPP voltage 500 V
5%	95.3%	95.0%	92.0%
10%	97.1%	96.9%	95.3%
20%	97.7%	97.6%	96.7%
25%	97.7%	97.7%	97.0%
30%	97.7%	97.7%	97.1%
50%	97.6%	97.5%	97.1%
75%	97.2%	97.0%	96.8%
100%	96.7%	96.4%	96.4%

6.11.2 Derating Behavior

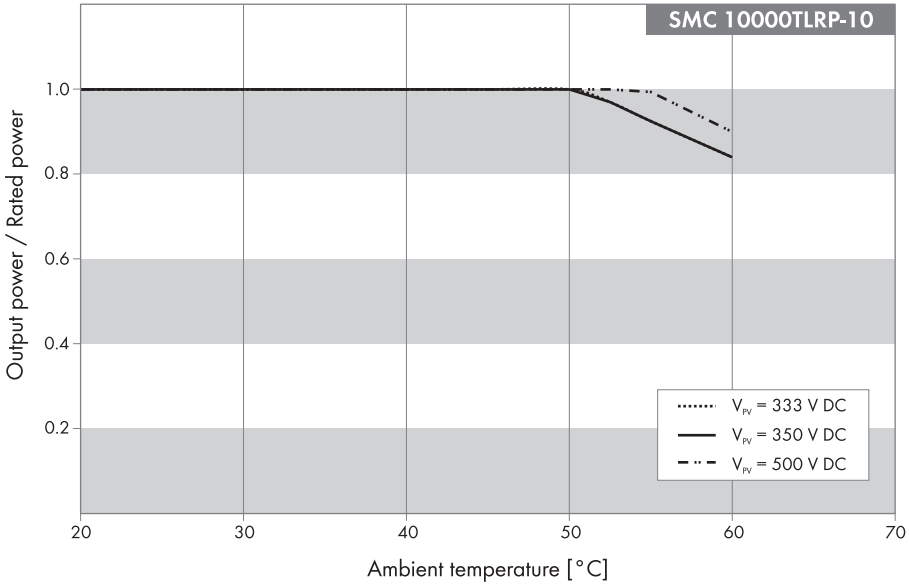

6.12 SMC 11000TL-10

6.12.1 Efficiency

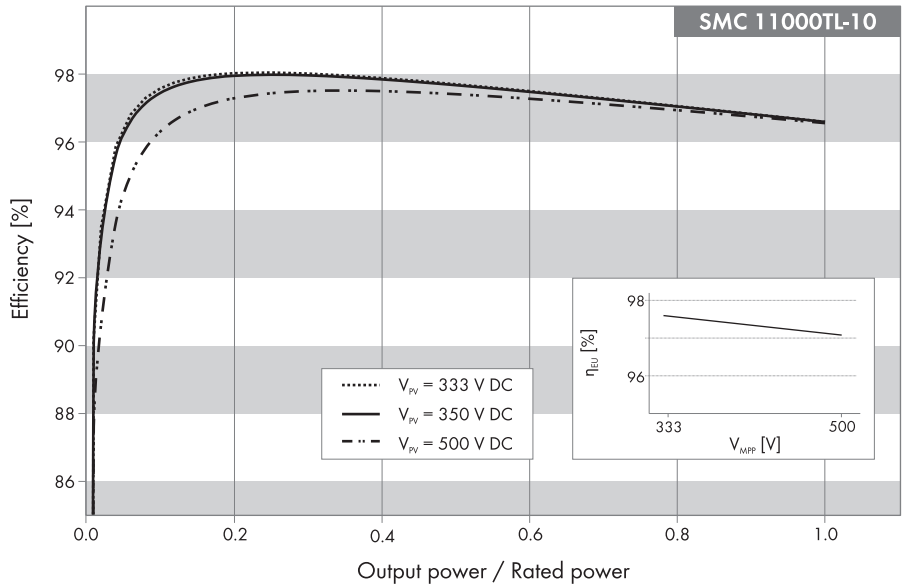


Maximum efficiency, $\eta_{\max}$	98.0%
European efficiency, η_{EU}	97.5%

Efficiency Profile


Standardized output power	Efficiency		
	Minimum MPP voltage 333 V	Rated input voltage 350 V	Maximum MPP voltage 500 V
5%	96.3%	96.1%	94.3%
10%	97.6%	97.5%	96.3%
20%	98.0%	98.0%	97.3%
25%	98.0%	98.0%	97.4%
30%	98.0%	98.0%	97.5%
50%	97.7%	97.7%	97.4%
75%	97.2%	97.2%	97.0%
100%	96.6%	96.6%	96.6%

6.12.2 Derating Behavior

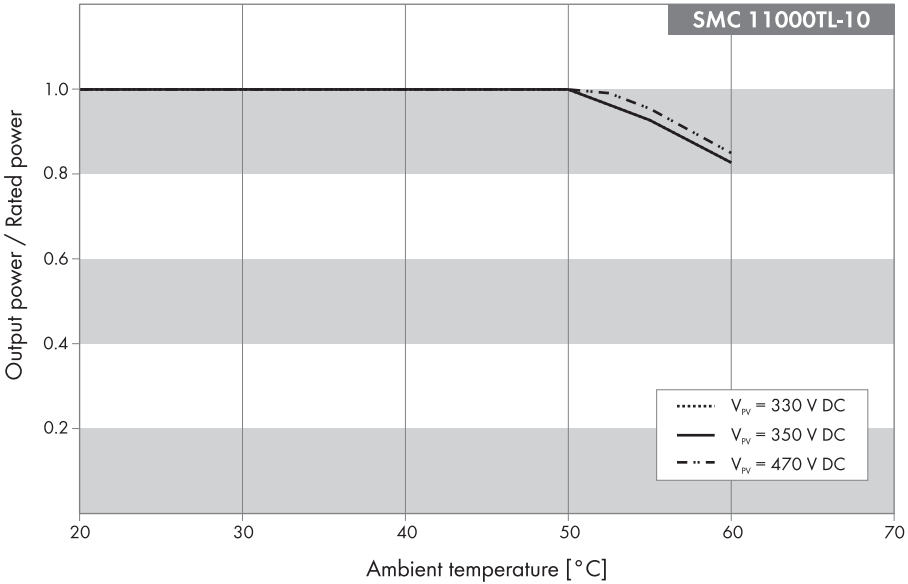

6.13 SMC 11000TLRP-10

6.13.1 Efficiency

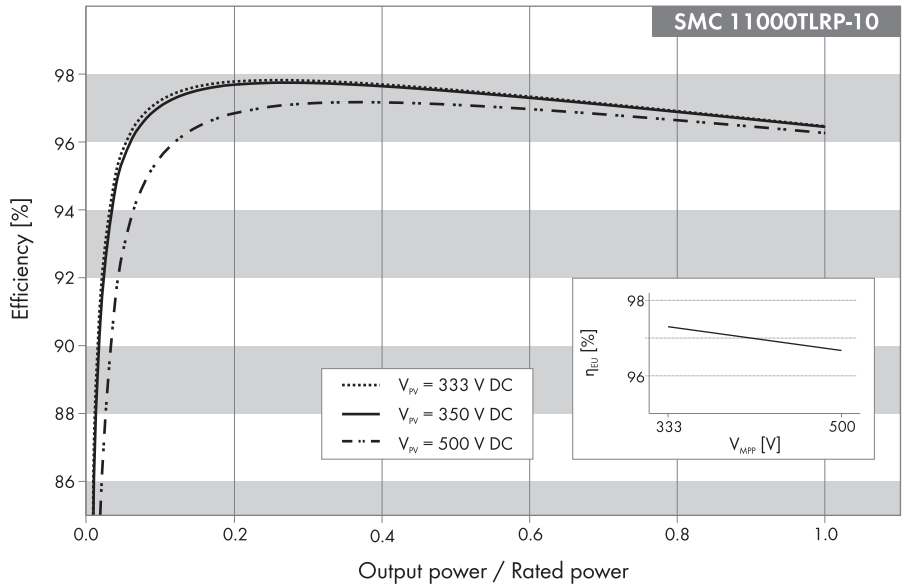


Maximum efficiency, η_{max}	97.7%
European weighted efficiency, η_{EU}	97.2%

Efficiency Profile

Standardized output power	Efficiency		
	Minimum MPP voltage 333 V	Rated input voltage 350 V	Maximum MPP voltage 500 V
5%	95.6%	95.3%	92.5%
10%	97.2%	97.0%	95.5%
20%	97.7%	97.7%	96.8%
25%	97.7%	97.7%	97.0%
30%	97.7%	97.7%	97.1%
50%	97.5%	97.5%	97.1%
75%	97.0%	97.0%	96.7%
100%	96.5%	96.4%	96.3%


6.13.2 Derating Behavior

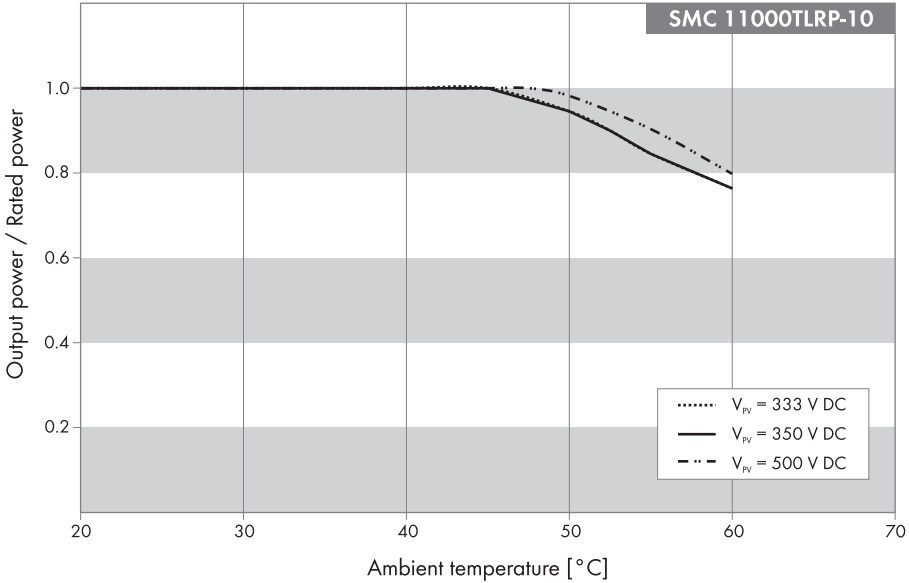

7 Sunny Highpower

7.1 SHP 75-10

7.1.1 Efficiency

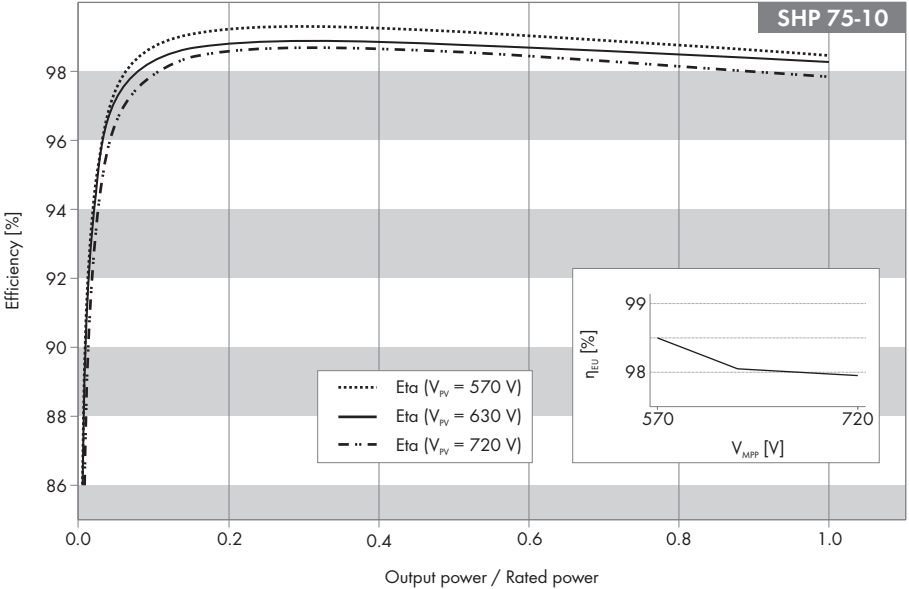


Maximum efficiency, $\eta_{\max}$	98.8 %
European weighted efficiency, η_{EU}	98.2 %

Efficiency Profile

Standardized output power	Efficiency		
	Minimum MPP voltage 570 V	Rated input voltage 630 V	Maximum MPP voltage 720 V
5 %	96.9 %	96.6 %	95.9 %
10 %	98.2 %	97.8 %	97.5 %
20 %	98.8 %	98.3 %	98.1 %
25 %	98.8 %	98.4 %	98.2 %
30 %	98.8 %	98.4 %	98.2 %
50 %	98.7 %	98.3 %	98.1 %


Standardized output power	Efficiency		
	Minimum MPP voltage 570 V	Rated input voltage 630 V	Maximum MPP voltage 720 V
75 %	98.4 %	98.1 %	97.8 %
100 %	98.0 %	97.8 %	97.4 %

7.1.2
Derating Behavior

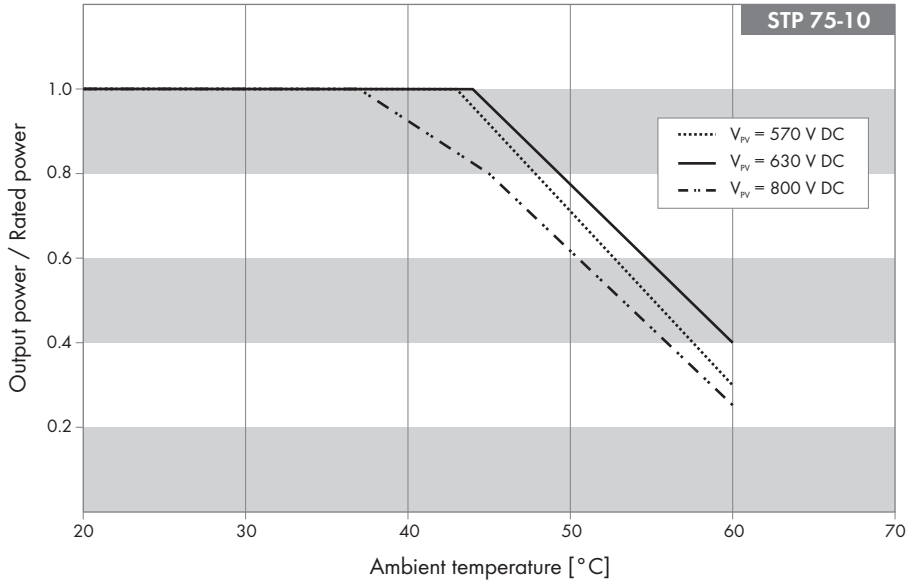

7.2 SHP 75-JP-10

7.2.1 Efficiency

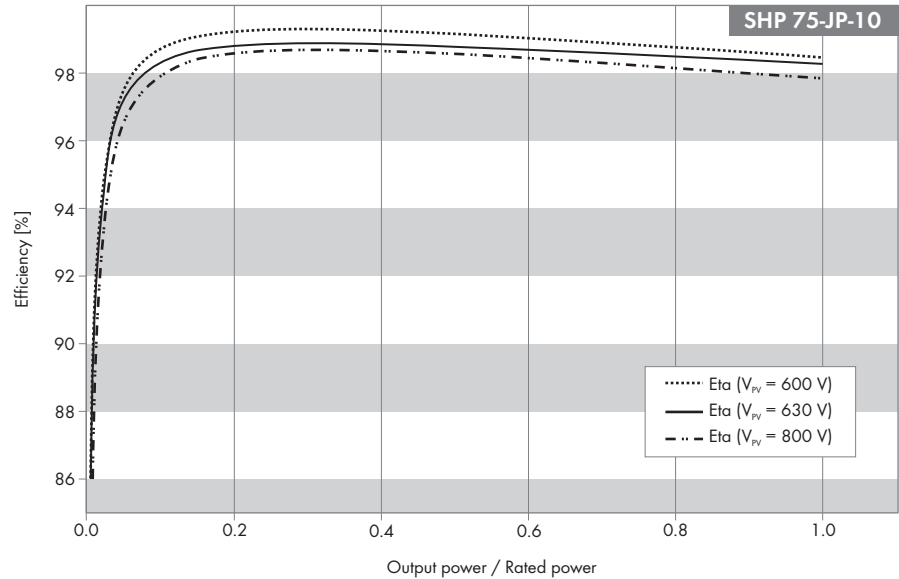


Maximum efficiency, $\eta_{\max}$ 98.8 %

European weighted efficiency, η_{EU} 98.2 %

Efficiency Profile

Standardized output power	Efficiency		
	Minimum MPP voltage 600 V	Rated input voltage 630 V	Maximum MPP voltage 800 V
5 %	96.9 %	96.6 %	95.9 %
10 %	98.2 %	97.8 %	97.5 %
20 %	98.8 %	98.3 %	98.1 %
25 %	98.8 %	98.4 %	98.2 %
30 %	98.8 %	98.4 %	98.2 %
50 %	98.7 %	98.3 %	98.1 %
75 %	98.4 %	98.1 %	97.8 %
100 %	98.0 %	97.8 %	97.4 %

7.2.2 Derating Behavior

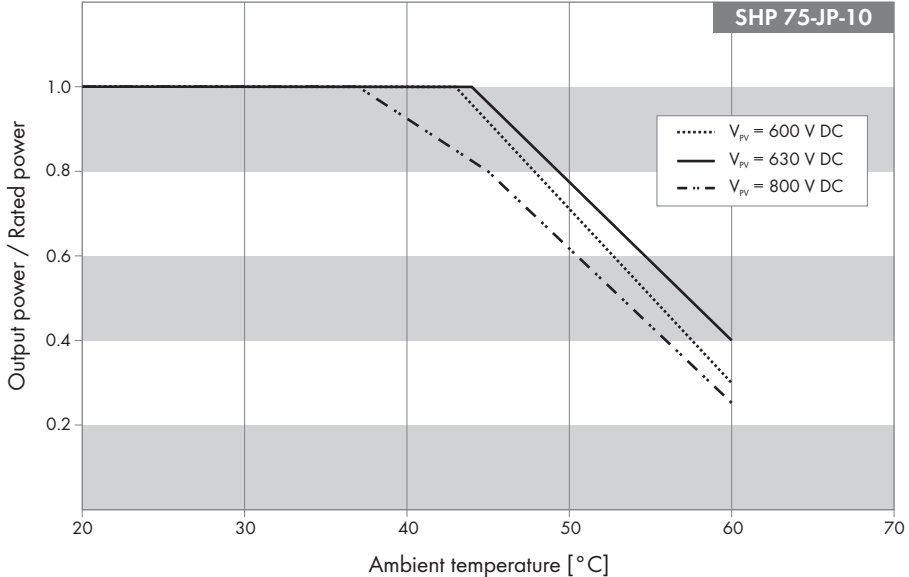

ENERGY
THAT
CHANGES

